

Magic xpa 4.12.1

Release Notes



OUTPERFORM THE FUTURE™

Contents

CONTENTS	i
Web Client Enhancements	1
Mobile Enhancements	1
Fixed Issues	1
MAGIC XPA 4.12	6
Web Client Enhancements	6
IMM Enhancements.....	7
Studio Enhancements	7
Runtime Enhancements	8
Database Enhancements.....	9
GIT Connectivity Enhancement	10
License Enhancements	10
Mobile Enhancements	11
Fixed Issues	11
MAGIC XPA 4.11.1	15
In-memory Middleware Enhancement	15
Studio Enhancements	15
Database Enhancements.....	15
Security Enhancements.....	16
Mobile Enhancements	16
Known Issue	16
Fixed Issues	16

MAGIC XPA 4.11	19
Web Client Enhancements	19
IMM Enhancements.....	21
Studio Enhancements	22
Database Enhancements.....	22
Mobile Enhancements	23
JSON Enhancements	23
General Enhancements	23
Fixed Issues	24
MAGIC XPA 4.10	29
In-memory Middleware Enhancements.....	29
Studio Enhancements	30
Runtime Enhancements	33
Web Client Enhancements	34
Database Enhancements.....	35
Git Connectivity and Support Enhancements.....	35
General Enhancements	35
Mobile Enhancements	36
Known Issues.....	36
Fixed Issues	37
MAGIC XPA 4.9	44
New Middleware (In-memory).....	44
Studio Enhancements	44
Runtime Enhancements	44
Web Client Enhancements	45

JSON Support.....	45
Database Enhancements.....	46
Security-related Enhancements	47
CI/CD Enhancement.....	47
Mobile Enhancement.....	47
Migration Enhancement	48
General Enhancements	48
Known Issues.....	48
Fixed Issues	49
MAGIC XPA 4.8.1	58
Studio Enhancements	58
Web Client Enhancements	58
JSON Support.....	58
Git Connectivity and Support Enhancements.....	60
Middleware Enhancements	60
Migration Enhancements.....	60
General Enhancements	61
Fixed Issues	61
MAGIC XPA 4.8	69
Studio Enhancements	69
UI Enhancements.....	70
Web Client Enhancements	70
Web Client Third Party Prerequisites.....	73
JSON Support.....	74
Runtime Enhancements	74

Database Enhancements.....	75
Middleware Enhancements	76
Mobile Enhancements	76
Log4j Vulnerability Handling	77
Browser Client Deprecation	77
Fixed Issues	77
MAGIC XPA 4.7.2	84
CI/CD Enhancements	84
Web Client Enhancements	84
Runtime Enhancements	86
Database Enhancements.....	87
Mobile Enhancements	87
Git Connectivity and Support Enhancements.....	88
A Note Regarding MSSQL Server Gateway Support for TLS 1.2.....	88
Fixed Issues	88
MAGIC XPA 4.7.1	94
Studio Enhancements	94
Runtime Enhancements	94
Git Connectivity and Support Enhancements.....	95
Web Client Enhancements	96
Mobile Enhancements	96
Known Issues: User Interface	97
Fixed Issues	97
MAGIC XPA 4.7	103
Studio Enhancements	103

Enhanced Git Connectivity and Support	104
General Enhancements	107
UI Enhancements.....	107
Migration Enhancements	107
RIA Enhancement	108
Runtime Enhancement	108
Database Enhancements.....	108
Web Client Enhancements	109
Mobile Enhancements	111
GigaSpaces Enhancements.....	112
New Special Flags	113
Fixed Issues	114
MAGIC XPA 4.6.3	121
Database Enhancement	121
Fixed Issues	121
MAGIC XPA 4.6.2	122
General Enhancements	122
Fixed Issues	122
MAGIC XPA 4.6.1	123
General Enhancements	123
UI Enhancements.....	124
Database Enhancements.....	124
Web Client Enhancements	124
Mobile Enhancements	125
Backward Compatibility Enhancement	125

Fixed Issues	125
MAGIC XPA 4.6	127
UI Enhancements.....	127
Studio Enhancements	129
General Enhancements	129
Web Client Enhancements	129
Database Enhancements.....	130
GigaSpaces Enhancements.....	131
RIA Enhancements.....	131
Mobile Enhancements	132
Browser Client Deprecated	132
Fixed Issues	132
MAGIC XPA 4.5A.....	135
Web Client New Features.....	135
Web Client Enhancements	135
64-bit Runtime Features	136
General	136
Fixed Issues	136
MAGIC XPA 4.5	137
Support for 64-bit Server Engine	137
Web Client New Features.....	138
Web Client Enhancements	140
Non-Web Client New Features	143
Non-Web Client Enhancements.....	144
Non-Web Client Removed Features.....	144

MAGIC XPA 4.1	145
New Features and Enhancements	145
Fixed Issue	146
MAGIC XPA 4.0	147
The Magic Web Application Framework	147
ABOUT MAGIC SOFTWARE ENTERPRISES.....	150

We are pleased to present Magic xpa 4.12.1 with new features and enhancements.

Web Client Enhancements

The following features are enhanced with respect to Web Client.

Generation Issues Due to Angular Version Conflict Resolved

If your local Angular version is different than the global version, you might have faced issues while generating OR serving the application. We resolved the issue thereby providing a cleaner look of the generated output folder.

Note: On successful application generation, the output folder is created without the following items in it:

1. node_modules folder
2. package.json
3. package-lock.json

Mobile Enhancements

The following features are enhanced with respect to Mobile.

iOS

Simulation Works on Changing Default Value

The default value of project's build setting `$(ARCHS_STANDARD)` must be set to `x86_64` for the project to run on the simulator.

Android

Update Project Target SDK and Compatibility Libraries to API 35

You need to upgrade Android SDK compatibility libraries to API 35 so that your custom applications developed using this API will work smoothly on Android 15 and higher devices.

Fixed Issues

Issue	Description
MXPA-34161	Exporting data from Korean-named Data Source with columns having Korean characters in name to MS Excel failed due to incorrect evaluation of the MID() function.

Issue	Description
MXPA-34269	After migration, the Form with multiple List Boxes, Labels, and Line controls inside a Tab control opened slowly.
MXPA-34603	After migration, Height of List Boxes under Tab control was changed in Form Editor when the Form was reopened.
MXPA-34610	On a machine with Hebrew locale settings, when the first font was changed to a particular font (Miriam 11) and if a Table with few columns was tried to stretch, then the leftmost column field was found to be shifting at the rightmost side of the Table on vertical scrollbar.
MXPA-34615	Changing the system's Regional Settings > Formats to French (Belgium) affected how JSON values were read and displayed.
MXPA-34780	The default language for the Expression Editor was found to be Hebrew instead of English.
MXPA-35069	The function UserGroups() retrieved the list of User Groups names appended by garbage characters.
MXPA-35084	The function JsonGet() returned NULL value instead of a blank Alpha string.
MXPA-35145	In a specific scenario, when a specific project was opened, Magic xpa Runtime crashed after few seconds.
MXPA-35185	On Apple devices running with latest iOS versions, an app did not ask for Photo Library Access permission thereby causing error while attempting to upload photos.
MXPA-35526	In a specific scenario, Magic xpa Studio crashed after migration while zooming on Form.
MXPA-35562	On Android devices, when a Button control was added on Form, the Button text was found partially cut-off at the bottom. Additionally, the text alignment was not vertically-centered as expected.
MXPA-35574	On Android devices, the ClientFileCopy() function failed to copy file to a destination folder in application external cache folder as the folder with project name was missing in the cache folder.
MXPA-35575	On iOS devices, the function Left(Trim()) did not display Umlauts and Unicode characters in an Edit field.

Issue	Description
MXPA-35607	On an Android devices with specific versions 15 and 16, the system bars turned invisible and the first Form control was found to be hidden.
MXPA-35610	Due to PostgreSQL gateway's inability, unlike Oracle DB, to map TIMESTAMP fields to Alpha-type data, key operations like Create, Insert, Update, Delete, and Range/Locate were not executing correctly.
MXPA-35612	Using Btrieve Gateway with MGBtrieve API2 created a new database connection for each parallel program execution, leading to excessive resource consumption.
MXPA-35620	When the flag SpecialUnicodeStudioDefaults=Y was used, then during Get Definition on Oracle Table containing VARCHAR2 columns it was observed that the columns were mapped incorrectly and the Picture Size was calculated 1 more than the original Format due to which, English/Dutch characters were unreadable.
MXPA-35649	The print operation gave incorrect output when a Form contained Page Header, Page Footer, and a Multiline Edit control with Expand Multipage enabled.
MXPA-35654	An attempt to update Date-only field failed and the PostgreSQL gateway log was found to contain the Date-Time field with garbage characters.
MXPA-35662	On iOS devices, the Click event was disabled, and the cursor could not be moved within a multiline Edit box.
MXPA-35699	While executing a stress test, an error, 'There are no xpa Servers currently available to serve this Application' (-104)' occurred.
MXPA-35713	In a specific scenario, when multiple Date columns included in Index segment were updated or a new record was inserted, Magic xpa was closed abnormally.
MXPA-35718	In a specific scenario, with PostgreSQL DB, when an Index included multiple Columns, then while attempting to Update the records Magic xpa crashed. Additionally, Code 22007 error occurred while attempting to Insert when Date Columns were mapped to TIMESTAMP with NULL data allowed
MXPA-35747	When an index in PostgreSQL database included multiple nullable Date columns, modifying any column except the first Date column in a newly inserted record triggered Code 22007 error.

Issue	Description
MXPA-35748	When running Web Client applications from studio, with Deployment Mode B allowed no more than three MGCSTK licenses on a single machine.

Past Release Notes



OUTPERFORM THE FUTURE™

Magic xpa 4.12

We are pleased to present Magic xpa 4.12 with new features and enhancements.

Web Client Enhancements

The following features are enhanced with respect to Web Client.

File Upload and Download Support

Magic xpa now supports uploading and downloading of file(s) to and from Server respectively. Please visit the help topic **How Do I Upload and Download a File?** in Magic xpa Help.

New Property for Route - Default Route Name

A new property named **Default Route Name** is introduced, which determines the Route Name to be considered as a default route. The default route is chosen when the route provided to the handler does not match any Call Program operations in terms of the Route Name or the condition.
Note: If there are multiple Router Outlets and if you want to define a default route call, then you need to define multiple Call Program operations with the same Route Name, using a different destination value per Router Outlet.

Dynamic Subform Destination

You can now assign an expression to Subform's Destination property. Assigning an expression to Destination property is provided when the Call Operation is available in Program, Sub Task, By Exp, and By Name.

Note: If Call Operation is inside the Route handler, the Destination property does not take an expression.

New Property for Combo Box: Editable

A property named **Editable** is introduced that specifies if the Combo Box allows editing and provides suggestions that match your input.

Valid values: True, False

Default value: False

Note: This property is valid only for material design.

New Property for Edit Autocomplete: On Demand

A property named **On Demand** is introduced, which is available only when *Autocomplete Mode* property is 'True' and *Binding Level* property is set to 'Character'. When On Demand property is set to 'True', the records are fetched on demand from Data Source, which are filtered as per the user input.

Note: This property is supported only for SQL databases.

Enhanced Overlay Window

You can now resize and move an Overlay Window with a Title Bar during Runtime.

Angular 19 Support

Magic xpa Web Client was tested and is compatible to work with Angular 19.

IMM Enhancements

The following features are enhanced with respect to Magic xpa In-memory Middleware.

ImmHost Setting Alignment

The earlier setting **ImmHost** is now changed to **IMM_HOST** for **magic.ini** and **CommandLine.bat** to bring the host settings into alignment.

The updated format is: **IMM_HOST=<protocol>://<Domain_Name>:<Ingress_Port>**.

This syntax is valid for the domain names starting with either HTTP or HTTPS across the board for **Magic.ini**, **mgreq.ini**, **.env (agent)**, and **CommandLine.bat**.

You can change the value of <Domain_Name> and <Ingress_Port> of the machine on which the IMM is deployed. Magic xpa Engine, on starting, comprehends those values and connects to IMM Host, Requester, IMM Agent, and CommandLine Batch files.

Studio Enhancements

The following features are enhanced with respect to Magic xpa Studio.

MgxpaStudioServices Utility Validates License

The Command Line Utility **MgxpaStudioServices** that runs independent of Magic xpa Studio now facilitates License Validation with the following arguments:

- /ValidateLicense=<License_file_path>
- /LicenseName=<License_feature>
- /LogFileName=<Valid_Log_Filename_with_Path>

The utility is also enhanced to lists all the possible arguments which you can pass with the syntax.

For more information, please visit the topic [Home > Reference Guide > Utilities > MgxpaStudioServices](#) in Magic xpa Help.

Composite Generator: PostgreSQL DB to Generate Stored Procedure

Composite Generator now supports PostgreSQL database to generate stored procedure that returns values.

Runtime Enhancements

The following features are enhanced with respect to Magic xpa Runtime.

New Function: Hash()

A function named **Hash()** is introduced to return a hashed string of type Alpha when an input string and an algorithm of choice are passed as arguments. Magic xpa supports the options of MD5, SHA-1, and SHA-2 (digest length 256) hashing algorithms to create hashed strings.

Note: The Client-side function is implemented only for Web Client and Rich Client on desktop.

New Mail Function: MailGetOAuth2AccessToken()

A function named **MailGetOAuth2AccessToken()** is introduced to return a string-type access token, which you can use to connect to a mail server.

New Parameter in MailConnect Function: oauth2AccessToken

A parameter named **oauth2AccessToken** is introduced in addition to the existing parameters. You can optionally use the access token (**oauth2AccessToken**) returned by the function **MailGetOAuth2AccessToken** in the **MailConnect** function as a parameter to connect to a mail server.

Note:

- OAuth2 authentication is supported only for MS Outlook.
- The **oauth2AccessToken** parameter is supported only on Java framework (MailFramework=J).

New Property for Batch Task Behavior: Skip Locked Records

A property named **Skip Locked Records** is introduced for Batch tasks, which on setting to 'Yes' or evaluating the expression to 'True' upon task entrance helps you execute the transaction completely without having to wait for the locked records to release. The property is available only when the task is:

- set to execute in Modify mode
- has a Main table

Note: The Skip Locked Records option works in case of Immediate locking strategy, Error strategy=RECOVER, and Transaction Begin Task Prefix, On Lock Record, and Record Prefix.

New Property for Group Control: Border Type

A property named **Border Type** is introduced for Group Control in case of only Online and Batch tasks in GUI Display - Static Model when the *Style* property is set to 2D.

The possible values for the property are Regular (default) and Rounded.

GetVarName & GetVarLetter Functions Exposed

The two Magic xpa functions **GetVarName()** and **GetVarLetter()** are now exposed for you to use in applications when the *End User Functionality Component* is loaded.

New Special Flag: SpecialJavaClassOverride

On setting this flag to 'Y' and attempting to load the .jar file into CRR, any existing classes are overwritten, if:

- The previous .jar classes are already extracted in the %Temp%MgxpaTempClasses folder.
- The jar file contains Java internal classes.

Valid values: Y, N

Default value: N

New Special Flag: SpecialSecurityFileMemoryEncrypt

A flag named **SpecialSecurityFileMemoryEncrypt** is introduced to avail encryption of passwords coming from Magic security file into the memory, set the flag to 'Y'.

Valid values: Y, N

Default value: N

Unicode Support for Specific Functions

The following functions are supported with the Unicode:

Blb2File, File2Blb, FileCopy, FileExist, FileDelete, FileInfo, FileRename, FileSize, FileListGet, and XMLValidate.

Database Enhancements

The following features are enhanced with respect to Databases.

Provision of Encryption with OLEDB19 Driver

A new keyword named **SQL_ENCRYPT=S** is introduced, which on setting in **Database Properties: SQL Server** provides Client encryption through SQLServer when the driver version is OLEDB19. The encryption is provided with the following enforcement levels:

- Optional (default)
- Mandatory
- Strict

In case of strict encryption, you need to provide one more newly introduced keyword named **SQL_CERTHOST=%CNName%**, which takes Client Name (CN)/Subject Alternative Name (SAN)/Domain Name System (DNS) name from the certificate.

GIT Connectivity Enhancement

The following features are provided with respect to Git connectivity.

New Environment Setting: GIT Timeout

Magic xpa introduces an Environment Setting named **GIT Timeout** for Magic xpa Studio. This setting enables you to specify the timeout interval (in seconds), for which Magic xpa waits while trying to execute a GIT operation. Magic xpa offers you to continue waiting if there is no response from GIT until timeout interval expiry.

Default: 10 seconds

Change Effective: Immediate

Magic.ini and Command Line Name: GITTimeout

License Enhancements

The following features are provided with respect to license enhancement.

New Licenses: MGRIAENT and MGWEBENT

Two new licenses MGRIAENT and MGWEBENT are introduced. Two new keywords named **ReservedRIAThreadsLicenses** and **ReservedWebClientThreadsLicenses** are introduced, which help you reserve a specific number of licenses permanently for Rich Client and Web Client applications respectively. The keywords are valid only for MGRIAENT and MGWEBENT licenses.

Note:

- The above keywords are supported only with IMM.
- A license is consumed when a request sent by Client is executed on Server by a thread. This consumption of license happens each time Server is accessed.

MGWEB as Secondary License

Now MGWEB is supported as a secondary license with MGENT1.

Note: If both **MGRIA** and **MGWEB** licenses coexist in the license file, then Magic xpa prefers **MGRIA** over **MGWEB**, and loads **MGRIA** as a secondary license.

Mobile Enhancements

The following features are enhanced with respect to Mobile.

Update Project Target SDK and Compatibility Libraries to API 35 Due to Google Play Store Restrictions

You need to upgrade Android SDK compatibility libraries to API 35 so that your custom applications developed using this API will work smoothly on Android 14 devices and below.

Note: To generate an APK using RIA Builder, set JAVA_HOME to Java 17 path in the magic.ini file.

Fixed Issues

Issue	Description
MXPA-22218	Multi-user environment induces challenges and, in some cases, client.config file gets deleted from the WCFClientModules/<servicename> folder due to which, WCF Web Service Consumers does not work.
MXPA-32564	XSS vulnerability was found when a specific hyperlink with JavaScript used along with scripts/DefError. The requester failed to validate the URL for malicious input.
MXPA-32995	While working with Oracle Gateway SQL command, when NULL() was passed as an argument at Runtime, the error, 'ORA-00927: missing equal sign' occurred.
MXPA-33661	When the Block If-Block Else and Block-End statements were not defined correctly, then while attempting to expand the Header line or performing Checker operation on program, Magic xpa Studio crashed.
MXPA-34232	The handle count in Task Manager increased to up to 10,000 when 10,000 requests were sent to the batch program. The users had to restart the server every 12 hours.

Issue	Description
MXPA-34276	When the projects were being in execution continuously for several days, memory leakage was observed.
MXPA-34375	On loading a .jar file into CRR, closing, and reopening the project issued an error, 'Class 'org.codehaus.stax2.validation.AttributeContainer' ('D:\Downloads\case103190_01\MagicObjectTest\MagicObjectTest.jar') wasn't found and can't be unloaded.'
MXPA-34411	On migrating to the latest Magic xpa version, in specific cases some users encountered unresponsive Runtime and memory leakage.
MXPA-34469	In Web Client tasks, the Internal event(s) raised asynchronously (Wait=No) in the Main Program were not executed thereby causing the Debugger not to stop at the Breakpoints for Internal events.
MXPA-34530	It was not possible to create a Web Client project at a default xpa installation location C:\Program Files (x86)\...\Projects, due to a space character being present in a folder's name.
MXPA-34582	While working with Microsoft SQL Server 2019, the Runtime crashed unexpectedly with Error 109.
MXPA-34601	A specific website was not getting opened in CefSharp Browser control. This bug was fixed on updating the CefSharp Browser version.
MXPA-34643	On using JSON Source Variable with Unicode Content Blob, the JSON Data Source was inoperable.
MXPA-34656	The passwords defined as UserIDs were not hidden/masked in the dumps created for Runtime engine. To fix the issue, a special flag named SpecialSecurityFileMemoryEncrypt is introduced.
MXPA-34731	In a specific scenario, on attempting to delete JAVA entry from CRR, Magic xpa Studio crashed, and the dependency classes became invisible while creating aliases. To fix the issue, a special flag named SpecialJavaClassOverride is introduced.
MXPA-34739	While working with Proxy, all clients were considered as a single MGWEB license, leading to an incorrect count of users.
MXPA-34827	Selecting or deselecting vector values linked to the List Box resulted in the error: "in XMLparser.blobPrefixLength invalid format."

Issue	Description
MXPA-34849	Invoking the SetCookie() function in Web Client Runtime resulted in unexpected termination of the application.
MXPA-34857	When SpecialExpReturnNull flag was set to 'Y', an expression returned NULL value, which on assigning to the Enabled property of a Button control erroneously enabled the Button instead of disabling it.
MXPA-34925	When Magic xpa Studio was started with Mgconst.heb and a Form was created with an Edit control with 'X' property having higher value than the Form width, then on closing and reopening the Form, the value of the Edit control 'X' property was changed.
MXPA-34933	No error message was logged in mgerror.log when 64-bit Runtime engine terminated due to incorrect filename assigned to RuntimeKeyboardMappingFile. Lack of error logging was also observed when some other parameters were incorrect while 64-bit Runtime was executing in Background mode.
MXPA-34940	In Web Client tasks with MSSQL and PostGreSQL DB, if the search string was entered, then the Search displayed some incorrect results along with the correct results.
MXPA-34959	On Android 14, in a particular scenario, Application crashed when the screen orientation was changed from Portrait to Landscape.
MXPA-34972	In a specific scenario, Magic xpa Runtime crashed sporadically.
MXPA-35011	In Web Client tasks, if CallJS() function was attempted to execute from the first Record Prefix in the routing scenario, then the function did not work as expected.
MXPA-35066	When Component references were used in the host project and the project ECF was created using Studio Services utility, then an error, 'Invalid picture' was shown in checker output.
MXPA-35078	On starting Magic xpa Studio with MGSRVTK license, APG did not work on Data repository with Browse option.
MXPA-35085	RIA was found to crash sporadically multiple times while creating PDF in a specific case.
MXPA-35174	Floating Window did not appear on the top of the immediate parent program.

Issue	Description
MXPA-35255	When the special flag SpecialDisableReadTransactions was set to 'Yes', in this specific case the performance was found to decline.
MXPA-35265	When the XML files encoded in various encoding formats (ANSI, UTF-8, UTF-16, and Unicode) were stored in Blob-type variables, then on using the function BlobFromBase64(), it was found that decoding the files from ANSI, Unicode, and UTF-8 formats returned incorrect characters.
MXPA-35345	If a Web Client program with a Table control named 'Table' having multiple records was called on a Route event, then the Table displayed with only one record.
MXPA-35414	Save changes confirmation dialog was issued unduly while exiting the Data Source Properties window when no changes were made, and going ahead with saving changes generated merging conflicts on Git.
MXPA-35440	Date did not display correctly for the picture format 'DDD MMMMM YYYYYH' when executed with ini.heb.

Magic xpa 4.11.1

We are pleased to present Magic xpa 4.11.1 update with new features and enhancements.

In-memory Middleware Enhancement

The following features are enhanced with respect to IMM.

New Command Line Utility to Remove Projects from Dashboard

A new command line utility is introduced named **ShutDownAndRemoveProjects.bat**.

On executing this utility, all project entries are removed from the Redis DB thereby from the monitor dashboard.

Rancher Desktop Replaces Docker Desktop (MXPA-34649)

Magic xpa IMM now supports Rancher Desktop in place of the previous Docker Desktop.

Studio Enhancements

The following features are enhanced with respect to Magic xpa Studio.

MgxpaStudioServices Executes Check Operation

The Command Line Utility **MgxpaStudioServices** that runs independent of Magic xpa Studio now executes **Check** Operation. For more information, please visit Magic xpa Help topic Home > Reference Guide > Utilities > **MgxpaStudioServices**.

Database Enhancements

The following features are enhanced with respect to Database.

Magic xpa now supports Microsoft SQL Server using OLEDB 19 driver new **mgmssql19.dll**.

OLEDB Driver 18 support continues with the existing **mgmssql.dll**.

New Flag: SpecialDisableReadTransactions

Presently, while running a Batch task with TransOpen = NONE and Links = 0, Magic xpa either skips opening the transaction, or it opens a transaction of its own. In both cases, Runtime opens a Read transaction for each Fetch operation.

To restrict this feature irrespective of the number of links, this special flag is introduced.

For a Batch task when TransOpen=NONE:



- if the flag is 'Y', then no Read transactions are opened.
- If it is 'N' or absent, then the Read transactions are opened.

Valid values: Y, N

Default value: N

Security Enhancements

The following features are enhanced with respect to Magic xpa security.

New Function: UserGroups()

A function named **UserGroups()** is introduced to return a vector having groups belonging to the logged-in user.

Mobile Enhancements

The following features are enhanced with respect to Mobile.

Update the project target SDK and compatibility libraries to API 34

You need to upgrade Android SDK compatibility libraries to API 34 so that your custom applications developed for higher versions will work smoothly on your Android 14 devices.

Support for iOS 18

Rich Internet Applications can now be executed on iOS 18.

Known Issue

The TabControl strip is positioned at Top of the Form and it is overlapped by Titlebar.

Fixed Issues

Issue	Description
MXPA-30203	In the case of a GUI-0 form with a default Width, when the Form Properties were set as Title Bar = False and Border Style = No Border, then on moving a control on the form partially outside the lower border to bring up the vertical scroll bar erroneously changed the Form's default Width to a bigger value.
MXPA-31714	When the project had a large number of programs and Data Sources, the delay was observed while opening the projects in Magic xpa than in uniPaas.

Issue	Description
MXPA-32402	The data corresponding to the columns headers was displayed right-aligned irrespective of the position of the device notch.
MXPA-32789	After each reinitialization of the Web Client session, additional slashes were appended to the logical names with slashes.
MXPA-33091	When a control is disabled, the foreground and background colors specified in the disabled color property were not being applied.
MXPA-33192	In iOS 15 or later version of iOS mobile devices, the DatePicker initially showed a Calendar-style date selection but switched to a Spinner-style view on subsequent attempts due to the Next Field event execution.
MXPA-33252	The Dropdown of Combo Box used in the HTML file with <select> element in the Browser control did not open using mouse.
MXPA-33254	On In-memory Middleware while using the functions ServerFileToClient() and ClientFileToServer(), file upload/download took longer than the time taken to perform the same functions on GigaSpaces or Broker.
MXPA-33791	The 'ERR-THREAD-ABORTED (-139)' occurred at runtime for the RIA application that created a PDF report using a Batch task.
MXPA-33865	On iOS 17 devices, Form Title, Picker, and Controls were not displayed correctly.
MXPA-33880	On iOS devices having notch, the Form Title was not displayed correctly when Orientation Lock was set to Landscape.
MXPA-34123	The Magic xpa studio hung while loading the complex XSDs in the Data Source using the Default XML database.
MXPA-34156	In a RIA, when Edit Control Zoom Button in the Table control was clicked for the second time, it did not call the Subtask.
MXPA-34250	When DNSet() function was used to update a .NET variable, the variable did not update.
MXPA-34271	The Logical Names defined in the additional INI file were not getting displayed while creating Component Interface Builder.
MXPA-34275	The Magic xpa studio failed to operate and closed while importing a program XML in the GIT environment.

Issue	Description
MXPA-34278	In a particular scenario, while working with Btrieve database when program had Range defined for 16 or more number of columns, Magic xpa Runtime Engine failed to function and closed.
MXPA-34315	While working on Oracle DB, when the General Task Property Resident task was set to 'Yes', then upon executing the program an error, 'ORA-01002 error: fetch out of sequence in oracle' occurred.
MXPA-34317	For both Btrieve Gateway API-1 and API-2, for 'Support' and 'Developer' Gateway logging, the logs were generated having garbage characters.
MXPA-34322	When the Magic xpa studio was opened with Mgconst.heb, the value of X property changed if it was greater than 3250. It did not retain the original value in text-based form upon saving and re-opening the same form.
MXPA-34333	Edit Control Zoom Button was not visible on GUI Frame and on RC Frame when the control's Show Zoom Button property was set to 'True'.
MXPA-34410	On executing a program with DataView containing a Blob variable and LogClient set to 'Y', an error, 'java.lang.Exception: in BlobType.getContentType blob is in invalid format' occurred.
MXPA-34460	While using Magic xpa Broker Monitor of higher version to connect to the Broker of Magic xpa lower version OR vice-a-versa, then the Broker stopped functioning and closed.
MXPA-34594	While using Btrieve-2 gateway, in an Online task incorrect data was displayed when Data View was defined in a shuffled order of columns.
MXPA-34596	While using Btrieve2 gateway, memory leak was observed while reading records in a Range.
MXPA-34597	The Blob data printed on 2nd page onwards was found to be invisible for the Rich Edit control.
MXPA-34695	The values in the Combo box were truncated from right side, displaying only partial text due to some specific Hebrew fonts.

Magic xpa 4.11

We are pleased to present Magic xpa 4.11 update with new features and enhancements.

Web Client Enhancements

The following features are enhanced with respect to Web Client.

Provision to Pass Parameters to Start Program

You can now pass named arguments to Start Program using the URL as below:

For example, <http://localhost:4200?order=popular&price-range=not-cheap>.

You can then use Magic xpa function **GetParam('price-range')** to retrieve the value not-cheap.

Angular 17 Support

Magic xpa Web Client was tested and is compatible to work with Angular 17.

Note: Angular 17 issues warnings on finding duplicate Component IDs. Make sure you name programs uniquely across the application.

Decoupling Server Configuration and Assets from Angular Application

Magic decouples server configuration and assets from Angular application thereby enabling you to deploy the same application for multiple tenants (that is, multiple clients with the same business requirements).

For more information, please refer to How to - Host an Angular Application on Multiple Tenants? from the \Support folder.

Support of 3 State Property for Check Box

The **3 State** property is now provided for Web Client tasks. To avail the third state, you need to set the **Null allowed** property of the variable attached to Check box to 'Yes'.

Part of Dataview Property now 'No' by Default

The **Part of Dataview** property is now 'No' by default.

Logging of Virtual/Real and Parameters

Magic xpa enables you to receive log of Real/Virtual Variables and Parameters (names only) that triggered Record Suffix operation. You would be able to receive the names in the console log on setting **InternalLogLevel** to 'RequestInfo' in server.config file.

Note:

- Variables (Virtuals/Parameters) that are part of Data View are logged.
- The variables updated using Update operation are logged.

Four-digit Century Support

While handling Date when you enter only two digits for a year, then Magic xpa automatically calculates 4-digit long century and displays it inline. This feature is supported for both; Native and Material themes.

For example, if Century=1930 is set in Magic.ini, then the year between 00 to 29 is interpreted as 20YY and the year between 30 to 99 is interpreted as 19YY.

Control Naming Convention for Label Control

When you drop a Real or a Virtual variable either from Variable Palette or by performing APG on the Form, the Label control is named as **L_<variable_name>**.

In case of the same variable appearing on the Form multiple times, the Label control is named as **L_<variable_name>_NNNN**, where NNNN is the number.

New Environment Setting: Web Client Caching Mechanism

Magic xpa introduces an Environment Setting named **Web Client Caching Mechanism** for Magic xpa Studio. This setting enables you to decide if you want to retain the current caching mechanism where the Angular application uses cache files stored in the **<xpa_installation_folder>\Web_Client_Cache** folder, OR you want them to be used from the **\src\assets\cache** folder. The setting takes either of the two values:

- **S**: Let the Angular application use cache files from **\src\assets\cache** folder.
- **O**: Let the application use cache files from **<xpa_installation_folder>\Web_Client_Cache** folder.

The purpose of this setting is to force Studio to use the \assets folder to retrieve cached metadata before moving to Runtime environment.

Default: O

Change Effective: Immediate

Magic.ini and Command Line Name: WebClientCachingMechanism

New Property: Park First On

A property named **Park First On** is introduced which enables you to decide on which Form control the program execution control must be parked at the start of program execution.

IMM Enhancements

The following features are enhanced with respect to In-memory Middleware.

WorkerRequestPollingInterval Default Value Changed

By default, a Worker in a Magic xpa Server now checks for the presence of pending requests in the IMM every 30 milliseconds (**WorkerRequestPollingInterval=30**).

New Parameter: DownscaleThresholdTime

A parameter named **DownscaleThresholdTime** is introduced for downscaling an idle Worker or a Server. It is the time (default 60 minutes) required for a Worker or a Server to be idle until it stops. You can set the desired time as required.

Support of REST API to Execute Batch Programs

Magic xpa provides you a way to use **REST API** and enable your application to execute Batch programs. You can define a list of Batch programs that you want to expose along with their arguments in an XML file and deploy REST API as a pod either on-premise or within a cloud-native service. The deployed REST API then converts REST calls into Magic xpa standard requests.

Magic xpa supports:

1. two Authentication methods with REST API:

- Basic
- OAuth 2.0.

2. returning an HTTP Response Code using **RqHTTPStatusCode()** function.

For more details, please see **How to - Use REST API to Execute Batch Programs.pdf** in \Support folder. Also please refer to the sample program located at <Magic_xpa_Installation>\InMemoryMiddleware\test\RestAPISample.

IMM Monitor Enhanced for Better UX

IMM Monitor is now enhanced for better security and ease of navigation.

- Monitor is **accessible** only when you enter correct login credentials. The default values are:
 - **Username** – administrator
 - **Password** – changeit
- A menu at the left side (**Left Menu**) provides ease of navigation and access, offering the following options:

- Dashboard
- Middleware Logs
- Archive Requests
- Licenses
- An option named **Project List** at the right top corner of the monitor facilitates access and filtering the list of all executing projects.

Studio Enhancements

The following features are enhanced with respect to Magic xpa Studio.

Command Line Utility for Executing BG Operations

Magic xpa introduces a utility named **MgxpaStudioServices**, which executes the following operations in background in deployment environment:

- Creation of Cache
- Creation of ECF
- Importing an existing project's XML

This utility exists in Magic xpa Installation folder. This utility executes independent of Magic xpa Studio executable.

Change of Operation Enforced to be an Informed Decision

Magic xpa now issues an informative warning dialog when you attempt to change an operation to some other operation under the Logic Tab. We advise you to select an appropriate action because the data lost due to the change of operation is irrecoverable.

New Special Flag: SpecialSmartUXMetadataUpdate

Magic xpa introduces a flag named **SpecialSmartUXMetadataUpdate**, which on setting to 'N' informs Magic xpa not to generate metadata of SmartUX Studio. SmartUX Studio starts irrespective of this flag's value but metadata is generated only when the flag is set to 'Y'.

Note: We recommend you to set this flag to 'No' only when you are not going to use SmartUX Studio as a Form Designer.

Database Enhancements

The following features are enhanced with respect to Databases.

Btrieve Database: Data Compression

A keyword named **COMPRESSION=Y** is introduced, which on setting in Options > Databases > Database Information > **SQL tab**, you can avail compressed Btrieve data.

Support of PostgreSQL 16

Magic xpa was tested and is compatible to work with PostgreSQL 16.

Mobile Enhancements

The following features are enhanced with respect to Mobile.

iOS 17 Support

Rich Internet applications can now be executed on iOS 17.

Barcode Scanning

We provide our own way to scan Barcode for Android and iOS mobile devices thereby removing dependency on any third-party tool.

Android

The two files – **BarcodePic2Shop** and **Pic2ShopActivity** are removed. Instead, you can see Magic's own file **BarcodeScanner.java**. You can use the file in **ClientNativeCodeExecute()** function in the following way:

```
ClientNativeCodeExecute (BarcodeScanner.scanBarcode', '0')
```

iOS

You can see Magic's own files **BarcodeScanner.h** and **BarcodeScanner.m**. You can use the file in the **ClientNativeCodeExecute()** function in the following way:

```
ClientNativeCodeExecute (BarcodeScanner.scanBarcode', '0')
```

JSON Enhancements

The following features are enhanced with respect to JSON support.

Support of Multidimensional Array

Magic xpa now enhances the function **JSONGet()** to support accessing the elements of multidimensional JSON arrays.

General Enhancements

The following general enhancements are added in Magic xpa.

Java SE 17 Support

Magic xpa was tested and is compatible to work with Java SE 17.

CefSharp Browser Control - Persistent Data

CefSharp Browser control now stores its cookies in C:\Users\<username>\AppData\Local\Microsoft\Windows\INetCache.

Fixed Issues

Issue	Description
MXPA-27538	In Oracle and MSSQL databases, when LimitLinkToSingleFetch was set to 'Y' and when Query Link did not contain Locate From/To, then it was observed that the SELECT statement did not have 'FETCH FIRST ROW ONLY' for Oracle and 'Top 1' for MSSQL in Query Link.
MXPA-29746	In a Table containing multiple Columns with the property Multi Column Display=True, it was observed that scrolling through those records during Runtime was very slow.
MXPA-29950	In a specific scenario where the HTTPCall() function returned a Blob value, the Broker was required to restart sporadically to overcome the logged error, 'System.OutOfMemoryException: Exception of type 'System.OutOfMemoryException''.
MXPA-30921	In a specific scenario, while executing an Online application, Magic xpa Runtime crashed sporadically.
MXPA-30921	When a Line mode program had multiple Link operations, it was observed that navigation among the table's rows and columns was unusually slow in Magic xpa than in uniPaaS.
MXPA-31157	In Btrieve Database, if the DBMS Log Level was set to 'Customer' and when an operation was performed on the database, then it was found that with Btrieve Level-2 API, insufficient information was logged as compared to the case with Btrieve Level-1 API.
MXPA-31352	When Web Style was set to 'HTML Table' and the Table control name was 'Table', then it was found that the Table displayed only 30 records despite having more records to display.
MXPA-32245	In a specific scenario, Magic xpa Runtime Engine crashed when Create mode was changed to Modify mode using Ctrl+M keyboard shortcut, and when Null value was assigned to a variable.

Issue	Description
MXPA-32281	While executing a Web Client program on an iOS device, Edit Control Zoom Button did not work unless you first park on the Edit control attached to that Zoom Button.
MXPA-32352	While attempting to close the application, an error, 'Abnormal termination: Out of memory...' occurred sporadically due to the Error log file size growing too large (in GBs).
MXPA-32387	An error, 'ORA-24327: need explicit attach before authenticating a user', was issued sporadically although correct Oracle credentials were used.
MXPA-32451	Scroll Bar was unduly visible on Magic xpa Form Editor if a control was placed at the boundary of the Form window.
MXPA-32744	While attempting to print a pdf file from a Browser control it was found that the Print Preview dialog was not available with the CefSharp browser.
MXPA-32807	In Web Client and RIA, memory leaks was observed when the application had a Blob variable definition, a JSON variable defined in the Main Program, and the function File2Blb was used.
MXPA-32835	While working on CefSharp Browser, logging-in was required at the end of each session, which happened due to unsaved cookies.
MXPA-32888	While using Broker/GS middleware, memory leak was observed when executing programs updating JAVA objects using File2blb() function for files greater than 6 MB in size.
MXPA-32929	Graphic Printer/Output Form was found to be performing slow in Magic xpa as compared to its performance in uniPaaS.
MXPA-32948	When a Data Source had a column of Unicode datatype with picture size >= 999, then the Oracle gateway logs showed '#' characters in place of the actual value in the DML statements.
MXPA-32994	In a specific scenario, after executing the program if attempted to park on a particular Task of the Program, Magic xpa Studio crashed.
MXPA-32998	While trying to INSERT Alpha and Unicode type values with Picture Size >=999 into the Database, it was observed in the Activity Monitor log that the values of the mentioned types were getting appended with '....' right after their 40th character.

Issue	Description
MXPA-33036	In a Web Client task, if the field had a specific picture size, and the Null allowed property was set to 'Yes', then entering an incorrect value into the field did not issue an error. Also, if a value with an unmatched format was entered, tabbing-out was allowed erroneously.
MXPA-33119	In a specific scenario when the special flag SpecialGSEnablePollingMultipliers was set to 'N', Magic xpa Runtime crashed.
MXPA-33145	When a request from the Browser sent arguments to the Web Requester (MgWebRequester.dll), the arguments were getting passed incorrectly.
MXPA-33152	If the context was closed due to Inactivity Timeout, then after graceful restart the engine was found to go into 'Pausing to Shutdown' state and again becoming available.
MXPA-33156	In a specific scenario, Magic xpa Studio crashed sporadically while working with the Expression Editor.
MXPA-33157	In Web Client tasks, when Subform Refresh was used and when Zoom Buttons were used in the Subtask, it was observed that the Button Click and Zoom events did not get triggered on the first click.
MXPA-33288	If an Angular application was already opened in Visual Studio code, and if generation of Control/Components was attempted from Magic xpa Studio, then an error, 'cannot generate while a generation process is already running.' occurred.
MXPA-33294	When a project was under Git version control, the Confirm Convert Operation dialog didn't appear while attempting to change the Table definition due to a large value of Internal ID getting set for the Table.
MXPA-33358	In RIA application that created a PDF report using a Batch task, a Runtime error 'ERR-THREAD-ABORTED (-139)' occurred after serving a few thousand requests.
MXPA-33360	While using IMM, an error, 'There are no more licenses available (-119)', was displayed while trying to execute the Call Remote batch requests under MGPART license.
MXPA-33375	An error message 'Oracle: ORA-24435: Invalid Service Context specified', was displayed when the connections were swapped after disconnecting the DB.
MXPA-33431	While using PostgreSQL DB with Native Gateway, and performing APG on Tables from Data Repository, an error, 'Code: 42703 ERROR: column



Issue	Description
	"firstname" does not exist...' occurred due to Column names (such as firstname in this error) getting imported without quotes around them while creating DB Views.
MXPA-33438	Save confirmation window was issued sporadically while exiting Data Source Properties window even when no changes were made, and going ahead with saving changes generated merging conflicts on Git.
MXPA-33443	A non-parkable Multiline Edit control did not show all lines when the special flag SpecialRenderEditAndTextAsControls was set to 'Y' and MGCONST was Heb.
MXPA-33471	In a specific scenario, RIA server crashed while using an incorrect syntax SELECT statement in a DSQL task.
MXPA-33524	In Web Client tasks when the Picture having two-digit year (DD/MM/YY) was used to display a Date from the current year, say 01/02/24, then the Date was displayed incorrectly considering it from a year in the past century 01/02/1924 due to the difference in the way Angular and Magic xpa recognize YY in Date.
MXPA- 33526	In a Batch task, while working with particular columns containing date/timestamp in an Oracle database, memory was getting consumed incrementally.
MXPA-33534	Magic xpa Studio was getting slowed-down for a couple of seconds when attempted to update Web Client programs or save any changes done in the programs. A flag named SpecialSmartUXMetadataUpdate is introduced to fix this behavior.
MXPA-33573	Digital Signatures tab was missing in Magic xpa Setup Launcher's File Properties window.
MXPA-33651	In a specific Online Parent-Child Task scenario, Table control in the Child Task at times showed only first record.
MXPA-33656	On using Java 11 when a project having JAR file loaded in Composite Resource Repository was attempted to open, it took long time to open.
MXPA-33742	DatePicker and TimePicker were not displayed correctly when they were closed by clicking on the Form's empty area and reopening them.

Issue	Description
MXPA-33794	In a specific scenario, Magic xpa Runtime crashed when logging with Data View was enabled and an application containing Components with GUI and .NET controls was executed in full Debug mode.
MXPA-33870	In a specific scenario, Magic xpa Studio crashed when executing an Automatic Processing Sequence file containing a 'Check' operation.
MXPA-33890	When a new program was added to a project then Tortoise Git was committing the program XML file automatically.
MXPA-33893	An Offline iOS application failed to start promptly and required multiple attempts to start it when Wi-Fi signal was disabled.
MXPA-33923	A Line control with Style as 2-D (thickness > 1) appeared to be shifted down in Form Editor whereas it was displayed correctly without a shift during Runtime.
MXPA-33937	Runtime exception occurred while using Btrieve Gateway Level-2 API when a program had range defined for 8 or more columns.
MXPA-33976	In Web Client Subtasks, an invalid option named 'None' was displayed for the Cache strategy option under Task Properties > Data tab.

Magic xpa 4.10

We are pleased to present Magic xpa 4.10 upgrade with new features and enhancements.

In-memory Middleware Enhancements

The following features are added with respect to Magic xpa In-memory Middleware enhancements.

Deployment on Cloud (AKS/EKS)

You can now deploy In-memory Middleware in Azure Kubernetes Service (AKS) and Amazon Elastic Kubernetes Service (EKS) clusters. Please refer to the following documents for more information:

- **Setting-up IMM in Azure Kubernetes Service (AKS) Cluster**
- **Setting-up IMM in Amazon Elastic Kubernetes Service (EKS) Cluster**

High Availability

Magic xpa provides high availability for In-memory Middleware. Please refer to the document **Setting-up IMM in Multi-node Cluster** for more information.

Menu options for IMM Server Monitor

Project-specific menu options:

- Start Servers
- Add New Server
- Stop Servers
- Restart Project Gracefully
- Shut down Pausing Servers
- Remove Stopped Servers

Server-specific menu options:

- Start Server
- Shut down Server
- Pause to Shut down all Servers on the Host
- Remove Server

Note: When you click on any of the two options **Shut down Server** and **Pause to Shut down all Servers on the Host**, the Server is shut down.

- In case of **Shut down Server**, the Server is forcefully shut down irrespective of any client running and Server status is changed to 'Stopped'.

- In case of **Pause to Shut Down all Servers on the Host**, if the context is running, then the Status of the Server(s) is shown as 'Available'. On terminating the context, the Server(s) Status changes to 'Stopped' and Redis data is retained.

Command Line Utility for Removing 'Stopped' Servers from Project

You can remove 'Stopped' Servers either from all running projects or from a particular project by executing a **RemoveStoppedServers.bat** file. Refer xpa Help for more information.

Requirement of Server ID in ProjectsStartup.json

You need to add Alphanumeric IDs for all Servers with different configurations in **ProjectsStartup.json** file so that you can identify each of the Servers uniquely. If you do not provide any IDs to the Servers, then IMM Monitor assigns numeric IDs to the Servers automatically in incremental order.

New Tab in Monitor: Archived Requests

A new tab named **Archived Requests** is introduced in IMM Monitor UI to display the requests-related information from MongoDB. A request can have the following statuses:

- Processed
- Timed out
- Processed after Time-out

The requests arrive at Archived Requests tab at a specified scheduler time. For example, Processed requests arrive every 10 seconds, and Timed out and Processed after Time-out requests arrive every 24 hours.

Clearing Logs from LOGDB

Another parameter to be mentioned in **values.yaml**, named **LOG_AGE_THRESHOLD_DAYS**, is the time interval at which Controller and Web Server logs are cleared from LOGDB. If you set it to 1, the scheduler is triggered once each day.

Studio Enhancements

The following feature is added with respect to Magic xpa Studio enhancement.

Integration of SmartUX™ Studio with Magic xpa

We are excited to inform that now Magic xpa integrates with SmartUX Studio, which enables you to use SmartUX Studio as a Form Designer for developing beautiful Web Client applications quickly and efficiently.

As a vital part of Magic xpa-SmartUX integration, while installing Magic xpa Studio product, if you select Web Client option while installing Magic xpa Studio, then SmartUX Studio executable

(SmartUX.exe) is installed automatically into a folder named **SmartUX**, which appears inside the root folder of xpa Installation.

When you set Interactive Task property '**Run project as**' to '**Web Client**', then each Magic xpa Engine instance starts one background service of SmartUX Studio.

SmartUX Prerequisites

You need to install the following tools to be able to access SmartUX Studio:

- Python 2.7 (specific)
- PowerShell 7

New Environment Setting: Start SmartUX Service in Background

Depending upon the value of an Environment setting named **Start SmartUX Service in Background**, the SmartUX service is started with or without CLI window. If you set its value to 'True', which is default, SmartUX service is started without CLI window and on setting it to 'False', CLI window is displayed while starting SmartUX service.

How to Access SmartUX from Magic xpa?

You can access SmartUX Studio from Magic xpa via a new menu option named **Open in SmartUX Studio** under its Web Client application development offering (**Options > Web**).

The menu option enables you to open your Web Client projects generated in xpa into SmartUX Studio. If you do not have an already generated Web Client project available, then the menu option creates a new Web Client project in SmartUX Studio. Please refer xpa Help for more details on **ProgramsList.json** file.

New External Environment Parameters

The following External Environment parameters are provided to let you specify respective paths to template folders of your choice:

- **SmartUX Custom UX Widgets Path:** path of external widgets.
- **SmartUX Application Template Path:** path of application templates.
- **SmartUX Component Template Path:** path of component templates.

Important Note: SmartUX Studio, the new Form Designer is released as a release candidate. Further release candidates will become available till the final release of Form Designer as an official product.

Logging of Virtuals/Parameters Values

Magic xpa logs all Virtual variables and Parameters into the Flow Monitor while debugging an application and when you set the Dataview option to 'Yes'. The values are logged in the following format:

Virtual : <variable_name> : <variable_value>

OR

Parameter : <parameter_name> : <parameter_value>

Note:

- The unprintable values such as Binary Blobs, .Net, JAVA, OLE, and ActiveX are logged as 'unprintable'.
- For RIA and Web Client you need to set the Logging option named Client activity to 'Yes'.

New Flag: SpecialNoPrefixControlName

A flag named **SpecialNoPrefixControlName** is introduced which on setting to 'Y', Magic xpa does not include the 'v_' OR 'p_' prefixes for the control names for the controls that are created on the form while dropping a virtual or a parameter. The same flag setting omits the prefix in case of APG on task/program also. When this flag is set to default value, then the existing behavior is retained.

Note: This flag is supported only in Web Client tasks.

Valid values: Y, N

Default value: N

New Flag: SpecialUnicodeStudioDefaults

This special flag when set to 'Y', assigns the default attribute type to 'Unicode' in place of the current default attribute type 'Alpha' for any new:

- Virtual and Parameter definitions in Data View
- Column definitions in the Data Source Repository
- Virtual definitions while using APG on Direct SQL statements
- Column definitions while using GFD (Options F9) in Data Source repository
- Column definitions while using XSD to create Data Source entries

Valid values: Y, N

Default value: N

Program Name Displays with Folder Name in Call Program

Program name in the Call Program operation line of Logic Editor now displays along with its Folder name such as: <Folder_Name>.<Program_Name>.

Runtime Enhancements

The following features are enhanced with respect to xpa Runtime Engine.

Runtime Snapshot with New Event: Dump Environment

To give you a detailed understanding of the current Runtime execution environment, we introduce an Internal event named **Dump Environment**, which on raising creates a snapshot in to the file named <ContextNumber><Timestamp>.env. The snapshot includes vital information such as:

- Path of the Runtime executable
- Type of architecture (32-bit/64-bit)
- OS architecture
- Process commit size
- Process peak commit size
- System total memory
- System available memory
- CLI arguments
- All the loaded components with their paths and timestamps
- Current values of all environment variables of all .INI entries for all the .INIs in the format entry=value. The following sections are dumped: MAGIC_ENV], [MAGIC_LOGICAL_NAMES], [MAGIC_SPECIALS].
- The Special Flags not having default values

New Special Flag: SpecialImmediateHandlerEnd

A flag named **SpecialImmediateHandlerEnd** is introduced to match the End task-related behavior of Event handler with RM Compatible. When this flag is set to 'Y', then the Event handler terminates immediately if the following conditions are met:

- The End Task condition is evaluated to 'True'
- The Evaluate condition is 'Immediately when condition is changed'

Note: As present, the task is terminated only when you click somewhere on the form.

Valid values: Y, N

Default value: N

New Special Flag: SpecialXMLRedecorate

A new special flag named **SpecialXMLRedecorate** is introduced to determine whether XMLInsert() and XMLModify() functions will decorate the project XML file or not. If this flag is set to 'N' then the functions XMLInsert() and XMLModify() will not decorate the project XML with indentation, thus reducing its size to transport it as data where ease of readability is not

a primary concern. If the flag is non-existent or default as 'Y', then the XML is redecorated by the two functions.

Valid values: Y, N

Default value: Y

Web Client Enhancements

The following features are enhanced with respect to Web Client.

Angular 15 Support

Magic xpa Web Client was tested and is compatible to work with Angular 15.

Support of 24Hr Time Format

Magic xpa now supports 24Hr time format even if the system time format is set to 12Hr.

Provision of ControllItemsRefresh Function

The function **ControllItemsRefresh()** is provided also in Magic xpa's Web Client solution.

New Parameter: changeSelectedRow

The service **TableMagicService.mgOnPaginateChange()** now accepts a new optional parameter named **changeSelectedRow**. If this parameter is set to 'true', the selected row changes on navigating the page. If the parameter is set to 'false' or not provided, then the old behavior is retained.

New Special Flag: SpecialGenerateWCCacheRuntime

A new flag named **SpecialGenerateWCCacheRuntime** is introduced to analyze the cache mechanism-related issues. When this flag is set to 'Y', then xpa Runtime generates cache in **%EngineDir%\Web_Client_Cache** folder and the cache mechanism uses them.

When this flag is set to 'N' or if the flag does not exist, then cache is not created in **%EngineDir%\Web_Client_Cache** folder. In this case, the cache mechanism uses the cache from **\assets** folder.

Valid values: Y, N

Default value: N

Note: This flag provides an option to revert to the previous behavior before xpa 4.9.

New Event: mgOnLoad

An event named **mgOnLoad** is introduced to inform you that the task has reached its first idle time. This event is raised once for every loaded or refreshed Web Client task.

Handling of INIPuts Restoration

The INI parameters that are changed in the current context are preserved on the Client. On recreating the next session, those parameters are restored in the new context.

Information if Issue in Cache Generation

If an error occurs during cache generation process, then Magic xpa issues a pop-up error message after which, you can open mgerror.log file for detailed error explanation.

Note: When cache is created via Studio using Batch processing, then the DevOps will need to determine whether mgerror.log file was changed during execution.

Automatic Separator Added in Date

Now Magic xpa ensures to add '/' automatically as a separator while you type values in the Date field.

Database Enhancements

The following features are enhanced with respect to Database.

Support of MSSQL Server 2022

Magic xpa now supports Microsoft SQL Server 2022 using OLEDB and using ODBC driver 17.

Git Connectivity and Support Enhancements

The following features are provided with respect to Git connectivity enhancement.

Support to Interchange Number of Branch IDs and Developer IDs

A new flag named **SpecialGITSwitchBranchDeveloperLimit** is introduced to interchange the number of Developer IDs and Branch IDs. When you set this flag to 'Y', xpa enables you to create 32 Branch IDs and 64 Developer IDs. If you do not use this flag or set it to 'No', the existing behavior of creating maximum 32 Developer IDs and 64 Branch IDs is retained.

General Enhancements

The following feature is added with respect to Magic xpa General enhancements.

Crash Dumps Creation Made Easy

Now creating Magic xpa crash dumps is easy. A Command Line option named

-PathToProcdumpExe is introduced, which you can use as follows:

mgxpastudio.exe -PathToProcdumpExe=<path_to_Procdump.exe> OR

mgxparuntime.exe -PathToProcdumpExe=<path_to_Procdump.exe>

With the above commands, Magic xpa Studio/Runtime Engine invokes the ProcDump utility and connects it to the Studio/Runtime Engine process that invoked it.

Note:

- We use Microsoft® ProcDump utility to create crash dumps. You can know more and download it from <https://learn.microsoft.com/en-us/sysinternals/downloads/procdump>.
- You can use the new CL option with both; 32-bit and 64-bit xpa Runtime Engines.
- If you are using 64-bit Procdump and invoking 64-bit Runtime from the xpa Studio executable, then the dump will be generated only for Runtime.
- Studio or Runtime will not start in any of the following conditions:
 1. PathToProcdumpExe is incorrect
 2. 64-bit Procdump is tried to execute on 32-bit Runtime Engine or vice-a-versa

Magic xpa on Windows 2022 Server

Magic xpa 64-bit is compatible to work with Windows Server 2022.

Mobile Enhancements

The following features are enhanced with respect to Mobile.

Android

Update the project target SDK and compatibility libraries to API 33: You need to upgrade Android SDK compatibility libraries to API 33 so that your custom applications developed for higher versions will work smoothly on your Android 13 devices.

New Function: ClientVideoCapture()

A function named **ClientVideoCapture()** is introduced to enable you to capture either by camera or from your gallery.

iOS

Support for iOS 16: Rich Internet Applications can now be executed on iOS 16.

Support for Xcode 14.3: Magic xpa 4.10 is compatible to work with Xcode 14.3.

Known Issues

The following are the known issues in this version.

- When you shut down a Server from IMM Monitor, you need to click 'Refresh' to be able to see the updated list of live Servers.

Fixed Issues

#	Description
MXPA-27592	On setting System locale to 'Hebrew', it was found that for typing each character, the Keyboard language was getting reverted to 'English'.
MXPA-27680	It was observed that the function <code>ServerFileToClient()</code> did not work when the filename contained '&' character.
MXPA-27696	In a specific scenario, while deleting the operations from Logic Tab, the Studio was found to terminate unexpectedly.
MXPA-27793	There was a difference in X position of the Form controls when the Form Units was changed from Centimeters to Pixels as compared to using the function <code>FormUnitsToPixels()</code> .
MXPA-27814	On exiting an application it was found that the console erroneously showed the date in the wrong format i.e., showed as Fr/03/YYYY instead of 11/03/2022 when <code>InternalLogLevel</code> was set as <code>RequestInfo</code> in <code>server-config.json</code> file.
MXPA-28810	When a Table had a Decimal type Column and if 'SELECT SUM...' query was tried to execute in <code>SQLExecute()</code> function, then the function issued incorrect output.
MXPA-28842	On Android devices, the text in the Edit box was not getting selected because the Editing Event 'Select All' did not work.
MXPA-29027	Magic xpa help topic <code>MailCharset</code> was required to update with correct information, which is updated now.
MXPA-29329	When a RIA task contained a Form (Window) without its Title and the Startup Position as 'Centered to Desktop', then it was found that the Window appeared smaller than its specified size, along with the scrollbars.
MXPA-29419	When a project was started by using its relative path through Command Line, then it was observed that the options file (.OPT) didn't get loaded, due to which the Breakpoints were getting reset.
MXPA-29462	On executing RM Converter on a uniPaaS project, the Automatic Tab Order property for Edit Control was getting changed or at times removed.
MXPA-29590	The cursor was not getting located at the last parked entry of the data repository if another repository was opened without closing the current data repository, and reopening it (Shift-F2).

#	Description
MXPA-29656	Garbage value was displayed in the Subject and the Message body when the system locale was set to Hebrew, Magic xpa Studio was started using HEB.ini, and MailSend() function was used to send mail via SMTP Server.
MXPA-29691	While printing data using Print Data wizard, it was observed that the output data was getting formatted using Picture of the Table Column instead of formatting according to the controls on the Form.
MXPA-29707	On iOS devices, In a specific scenario, Magic xpa crashed when parked on the Date picker after executing the Control Verification operation.
MXPA-29844	On migrating projects from uniPaaS to Magic xpa, it was found that the RM Converter was generating duplicate expressions IDs resulting in syntax errors.
MXPA-29895	In a particular scenario, the order of the Subtasks in the program was found to be changing intermittently and Studio was crashing.
MXPA-29937	On mobile devices, while executing a RIA with a URL on Browser control, an error 'Cannot read properties of null (reading 'getItem')' was displayed.
MXPA-29972	In a particular scenario, Magic xpa Runtime crashed when a function was used inside a condition in an Event handler.
MXPA-30004	While working on Btrive DB, when the Range Order of the task was set to Descending and when the Main source index was non-unique, an error, 'DBMS error during fetch operation : 8' occurred.
MXPA-30017	It was found that while trying to set HTTP status code using the function RqHTTPStatusCode(), the request did not materialize.
MXPA-30019	On migrating a uniPaaS project, it was found that the controls on the Table Title were not linked to the Table if the Table Style was Windows 3-D and if it was inherited from a model.
MXPA-30161	In a specific scenario, Studio crashed if Find Reference (Ctrl+F) was performed on a variable that was used on the form.
MXPA-30170	{quote}In case of offline RIA, it was found that the app executed slowly on each reconnect after the Context inactivity timeout.{quote}
MXPA-30171	Record Prefix was not getting executed on the next screen event when the last page had fewer number of records than the number of records in the previous page, and the selected row on the last page had no record on it.

#	Description
MXPA-30191	While debugging an application if a Breakpoint was set in a Component project, then it was found that the Variable values and Call Program lines erroneously showed data as '??' and 0 respectively.
MXPA-30203	In the case of a GUI-O form with a default Width, when the Form Properties were set as Title Bar = False and Border Style = No Border, then on moving a control on the form partially outside the lower border to bring up the vertical scroll bar erroneously changed the Form's default Width to a bigger value.
MXPA-30242	In RIA application, if a Logical Name is assigned to WebDocumentPath in Magic.ini, then it issued an error as 'An error occurred (-156). Please contact your system administrator.', and the Browser control did not display.
MXPA-30441	In a Web Client application when Multilingual support was availed and Web Style property of Table was set to 'HTML Table', then on generating HTML file by selecting 'Generate Recursive HTML', the generated HTML showed '[object Object]' instead of Column name in Table Header.
MXPA-30458	In the Parent-Subtask scenario, when Allow Parking property of all controls was set using expressions evaluating to FALSE, then it was found that in uniPaaS the Subtask was closed and cursor was returned to Parent task, and in xpa the Subtask did not close but the cursor disappeared.
MXPA-30476	When ControlItemRefresh() function was used on a Drop-down box associated to a Table, the Client was found to freeze, on trying to exit the program.
MXPA-30480	In a particular scenario on using SQLExecute() function, xpa Runtime crashes sporadically.
MXPA-30488	In a Web Client program, it was observed that the function ControlDisplayList() returned a string with Items List value instead of returning a string with Display List value of the control..
MXPA-30492	It was observed that the Linux Server-related documents referred to each other with insufficient information.
MXPA-30528	When a variable of type Time with format 'HH:MM' was updated using Time() function, then the value was getting displayed in the format 'HH:MM:SS' if the number of Seconds was non-zero.
MXPA-30592	It was observed that it took longer time to read the json file using JSONGet() function.

#	Description
MXPA-30629	In Magic xpa when an Edit control was placed in the Table Title area, then it was observed at Runtime that the text orientation was incorrect unlike it was in UniPaaS.
MXPA-30681	While trying to navigate a Subtask's Table, it was found that the Tab key did not move focus to the next field and it was not possible to add new data or alter any existing data in the Table.
MXPA-30775	When incremental search was performed on a Table Column, then it was found that the records were not ordered by that Column.
MXPA-30787	One message was not deleted from the Outlook and Gmail Inbox when MailDisconnect() function and connected using IMAP/POP3 Server.
MXPA-30876	In a specific scenario, Magic xpa Studio crashed while trying to generate cache files multiple times.
MXPA-30878	Magic xpa Studio crashed while loading or reloading a component from CRR when the project had multiple interlinked components.
MXPA-30879	When parked outside the table control if clicked on a table row, the row did not get into focus if the clicking was done in the empty space between any two controls of that row.
MXPA-30886	It was not possible to consume Web Service using Java with 64-bit Runtime Engine as it issued an error, ERR-THREAD-ABORTED (-139)'.
MXPA-30935	On Android devices, if the first control on the Form was a choice control, and trying to park on an Edit control the first time after opening Magic xpa client, then the keyboard was found to open only momentarily.
MXPA-30936	In a specific scenario, on using LDAPConnect() function an error, 'Assertion failed!' occurred and Magic xpa Runtime crashed.
MXPA-31005	Cache files were not getting generated if Logical names were used in Web Application folders from Additional INI using Tools Infrastructure.
MXPA-31019	An error, 'ORA-01480: Missing NULL...' occurred when a binding variable was present in an expression of a DSQL Task and it contained a negative value.
MXPA-31026	When RM Converter was executed on a specific program, then multiple issues were observed such as Runtime engine crash, suspension of Studio on expanding

#	Description
	Block operation, and an unsuccessful Link operation on Table having records within Range.
MXPA-31037	In a RIA, while consuming Web Service using WCF using 64-bit Runtime engine, an error, 'WCF Assembly cannot be created/overwritten' was issued.
MXPA-31054	On migrating project from a lower xpa version to a higher one, when Invoke COM operation was used to read the properties of PDF file and if the property was blank, then invalid characters appeared in place of the expected blanks.
MXPA-31081	It was possible to create only 100 Indexes and Segments with Btrieve API2 Gateway, despite the maximum number allowed by Actian Zen15 is higher.
MXPA-31209	When a Web Client application was generated with the Native theme and when a value from a source Table was assigned to a Combo Box, then if that value was modified in the Table it was found that on raising the View Refresh event, the Combo Box still displayed the previous value.
MXPA-31222	The persistent data stored by the Angular Local Storage was getting cleared on refreshing (F5) the web page.
MXPA-31294	An error, 'Park error item has been deleted :Row ISN not found' was issued when clicked on the Find Reference (Ctrl+F) for the Call operation that was defined in the Block operation of the RM Compatible handler in a migrated project.
MXPA-31320	In a specific scenario after passing through RM Converter, an operation previously outside a Block was getting added inside the Block, thereby affecting the execution of that operation.
MXPA-31330	In RIA if there were multiple radio controls referring to the same variable and if the focus was changed from one Radio button to another, then it was found that the CHG_REASON of Variable Change handler erroneously returned 1 instead of returning 0.
MXPA-31372	The following error was displayed in the debug.log for RIA and Online tasks while viewing the PDF file in Browser control: 'Unchecked runtime.lastError: Not implemented", source: chrome-extension://mhjfbmdgcfjbbpaeojofohoefgiehjai/index.html (0)'. chrome-extension://mhjfbmdgcfjbbpaeojofohoefgiehjai/index.html (0)'
MXPA-31390	In the case of Oracle and SQLite Databases, it was found that some particular numeric values say, 42 and 63 in the Locate expressions produced an incorrect query statement containing 0 and -1 instead of 42 and 63.

#	Description
MXPA-31418	In a specific scenario it was found that on deleting a Table's records and re-logging into the application, Magic xpa Runtime terminated unduly.
MXPA-31435	While switching among tabs, it was found that the Edit Control Zoom Button was getting visible when its 'Visible' property was set to 'False'.
MXPA-31555	The operation defined in the Control Verification handler with Flow mode = 'F' (Fast) was not getting executed when a control in an orphan task was clicked.
MXPA-31686	In a Web Client task, an error, 'Cannot read properties of undefined' is issued in the console when clicking on a Column header to sort, and using CndRange() function in the Range expression for a MySQL Table.
MXPA-31792	In the case of an Online program in which an Event raised on a shortcut key executed an Update command in a handler, it was observed that the 'Record Suffix' was executed unduly when the condition to execute the same was not satisfied (Force Update = No).
MXPA-31806	In a specific scenario, while executing APG on a JSON Table containing a specific number of columns, a Runtime execution error occurred.
MXPA-31817	On using a Unicode Blob value for XML Data Source, some garbage value (the '<' sign) was getting displayed while browsing.
MXPA-31849	On iOS devices, while selecting and confirming the date from the Date picker, the 'Done' button was visible partially.
MXPA-31903	An error, 'HTTP Error 503. The service is unavailable.' occurred while attempting to access xpa Requester causing the crash of w3wp.exe.
MXPA-31964	When an eDeveloper Task having an RMCompatible logic unit was converted to xpa Task using the RMConverter executable, then it was found that the Block-If operation was getting deleted in a specific logic structure where operations were converted into CV handler.
MXPA-31988	In Web Client programs, a Tooltip defined in Japanese character string was displayed as garbage.
MXPA-31999	In a specific scenario, when Link Join operation was used on a Table in a Resident Task twice; once with Link condition evaluating to 'True' and the other time to 'False', then while committing Update operation, 'Invalid ROWID error' occurred and Runtime Engine crashed.

#	Description
MXPA-32083	In a Web Client application with Native theme, a Combo box was found to display a value erroneously instead of being blank at the start as expected.

Magic xpa 4.9

We are delighted to present 4.9 update with new features and enhancements.

New Middleware (In-memory)

Magic xpa introduced a new In-memory Middleware (IMM), which is an underlying messaging layer of Magic xpa implemented on In-memory Data Store. The middleware supports:

- **Scalability** - Processing power can be scaled up easily by spawning new XPA engines with the help of IMM controllers and agents
- **Robustness** - Under the stress of heavy load of xpa requests the middleware system performs efficiently and ensures good response time for every request
- **High Availability** - High availability can be achieved with Kubernetes cluster orchestration.

Please refer to the help section Home > Reference Guide > Distributed Application Architecture > Middleware Gateways > **In-Memory Middleware**.

Note:

- The projectsStartup.json file describes various projects that are about to start. You need to mention the machine name and not the machine IP inside the Servers tag.
- Magic xpa discontinues the support of GigaSpaces middleware.

Studio Enhancements

The following feature is added with respect to Magic xpa Studio enhancement.

Web Client Application Deployment

Magic xpa Studio provides a menu option named **Prepare for Deployment** under the menu Web. This option enables you to generate cache files and/or create cabinet files.

Support to Allow Changing Z-order of Edit and Label Controls

If the flag [SpecialRenderEditAndTextAsControls](#) is set to 'Yes' then the Form Designer menu **Format > Options > Bring to Front, Send to Back, Move Forward, and Move Backward** works for Edit and Label controls, just like it works for real controls.

Runtime Enhancements

The following features are added with respect to Magic xpa Runtime enhancement.

New Flag: SpecialTruncateValueViaParameter

A new flag named **SpecialTruncateValueViaParameter** is introduced, which lets you choose whether to avail the existing behavior of truncating variable values when passed by parameters as it is, or to enforce rounding-up of variable values. When set to 'Y', the old behavior of truncating values is retained.

Valid values: Y, N

Default value: N

New Flag: SpecialRenderEditAndTextAsControls

A new flag named **SpecialRenderEditAndTextAsControls** is introduced, which in case of the combination of Label and Edit controls, and container controls, if set to 'N', then only the parked Edit control is rendered as real. On setting this flag to 'Y', all Label and Text controls are rendered as real controls.

Valid values: Y, N

Default value: N

Web Client Enhancements

The following features are enhanced with respect to Web Client.

Cache Files Created for Deployment in Magic xpa Studio

Now without having to switch to a different environment, you can check if cache creation in Studio was successful. Magic xpa provides a way in the Studio to create cache files for Deployment.

When you select the menu **Web > Prepare for Deployment**, Magic xpa offers a dialog box in which when you select **Create Web Client cache** option, the cache files are created from Studio into **src\assets\cache** folder of your Web Client application.

For more information, please go through the concept paper in Magic xpa help at: Home > Concept Papers > Deploying Web Client Applications > **Generating Cache Files in Magic xpa Studio**.

Note: This feature is provided only for Studio.

Support of Alpha Masking

Alpha masking is supported in Web Client programs using ngx-mask package. Please refer the default special masking characters list at: <https://www.npmjs.com/package/ngx-mask>.

JSON Support

The following features are enhanced with respect to JSON support.

Conversion of Private JSON Data Source to Shared

In Magic xpa Studio a new menu option named **Share Private JSON Data Source** is provided, which upon clicking converts a Private JSON data source to a Shared JSON data source and makes it available in Data Repository.

Export/Import Entire JSON Structure

Magic xpa now supports exporting the entire JSON tree structure with all its Shared and Private tables from an application automatically. You can then smoothly import them in another application.

Note: Exporting a Data Source Repository with JSON data sources from version 4.9 into an earlier version (say 4.8 or 4.8.1) will have unpredictable results, therefore it is not the recommended action. Export/Import of the entire application will work well.

Database Enhancements

The following features are enhanced with respect to Databases.

Support of Level-2 APIs with Btrieve Gateway

Magic xpa update now provides Btrieve Gateway with Level-2 APIs. With this new API, Magic xpa supports Btrieve file with:

- AES 192 Encryption for Zen version 13
- AES 256 Encryption for Zen version 14 and 15
- Enhanced size up to 64TB
- 32bytes owner name

Note: The existing Btrieve Gateway Level-1 API will remain unchanged. We will still provide it for compatibility purpose, but we will not maintain it.

Support of MSSQL DB through ODBC

A new gateway is introduced for MSSQL Server Databases using ODBC with which Magic xpa supports MSSQL DB connectivity based on ODBC through a separate gateway dll named **SQLServerODBC.DLL**. This gateway enables you to deploy your applications on Linux platform and connect to SQL Server. The applications will use the same ODBC gateway on Windows and Linux.

Dataview result set limit Property Supported for PostgreSQL and MSSQL

The recently introduced property **Dataview result set limit** is now supported also for PostgreSQL and MSSQL.

Security-related Enhancements

The following features are enhanced with respect to security.

Provision of Resident Security File

Magic xpa provides a new setting named Resident Security File, which on setting to 'Yes' keeps the security file contents resident in memory always and on setting the same to 'No' makes each update to the file (read/write) by accessing the contents of the physical file present on the disk. For detailed information, please visit Magic xpa Help topic Home > Reference Guide > Settings > Environment Settings > Preferences

Available	Tab > Resident Security File.
Default:	No
Change effective:	After restart

Magic.ini and Command Line name: ResidentSecurityFile

Support to Access External Vault Secrets

You can access external vault secrets from Azure Key Vault. A function named **ExternalVaultReload()** is introduced to reload the modified values of vault's secret names into Logical Names table. For detailed information on connectivity and accessing the Azure Vault secrets, please visit Magic xpa Help topic Home > Mastering Magic xpa > Security > **How Do I Access Azure Key Vault Secrets?**

CI/CD Enhancement

The following feature is enhanced with respect to CI/CD.

Provision of 'Cache' Operation Command

A new operation command named 'Cache' is provided to be able to create Web Client cache files. The cache files are created into the application's folder `\src\assets\cache`.

Mobile Enhancement

The following features are provided with respect to mobile.

Android 12 Support

Magic xpa was tested and is compatible to work with Android 12.

Android-specific Functionality

Update the project target SDK and compatibility libraries to API 31: You need to upgrade Android SDK compatibility libraries to API 31 so that your custom applications developed for higher versions will work smoothly on your Android 12 devices.

iOS 16 Support

- Rich Internet Applications can now be executed on iOS 16.
- Magic xpa was tested and is compatible to work with Xcode 14.x.

Migration Enhancement

The following feature is enhanced with respect to migration of applications from old versions to new ones.

Combo box and List box Control's BG Color Migrates Correctly

On migrating a uniPaaS application to Magic xpa, it was observed that when the Combo Box control's and the List box control's Style properties were 3D Sunken & 3D Raised in uniPaaS, and when the controls' default BG color was inherited, then the controls' default BG color did not appear correctly in Magic xpa. This behavior is fixed now.

General Enhancements

The following features are enhanced in general.

Windows 11 Support

Magic xpa was tested and is compatible to work on Windows 11. This support was given since version 4.8.1.

Expand/Collapse Information Documented

The performance issue addressed for bug [MXPA-28760](#) regarding large-sized options file reducing the speed of loading projects is described in help elaborately in the help topic Home > Reference Guide > **Logic Editor**.

Known Issues

The following are the known issues in this version.

Values After Decimal Point Become Zero

In Web Client tasks, if the picture size of a numeric variable is 16.2, and in Magic xpa if a value is entered for it as 1234567890123456.12, then the value after the decimal point is displayed as 1234567890123456.00 in Angular. This turning of values after decimal point to zero takes place due to the limitation of picture size 14.2 digits in Angular.

Mention of Machine Name in projectsStartup.json

The projectsStartup.json file describes various projects that are about to start. You need to mention the machine name and not the machine IP inside the Servers tag.

Web Service Provider

Magic xpa does not support providing Web Services out of the box at present.

Fixed Issues

#	Description
MXPA-20643	In Online and RIA, when trying to scroll using the context menu of the scroll bar (Top/Bottom) it only scrolled ~30 records and not actually to the Top/Bottom of the table records.
MXPA-25224	While executing xpa Runtime, an ECF took long time to load the component when 'Load immediate' component property option was unchecked (No Load immediate) in CRR, and the component had some .NET Assemblies in its own CRR.
MXPA-25273	While executing a RIA, it was observed that records were not getting displayed in a DataGrid .Net control when Operations Flow and Client activity properties were set to 'Y' while Activity Monitor was running.
MXPA-26032	While upgrading a RIA from uniPaaS to Magic xpa, if the Startup position property of the application form was set to 'Centered to Desktop', then the application window appeared slightly below than the expected position in Magic xpa, unlike it appeared at the correct position in uniPaaS.
MXPA-27236	The package '@magic-xpa/cli' should have been defined only in devDependencies but erroneously it also appeared in production dependencies. Due to this duplicate definition, Angular issued the following warning during installation: 'input\\nodejs.lognpm WARN The package @magic-xpa/cli is included as both a dev and production dependency.' The bug is fixed by keeping the definition in devDependencies only.
MXPA-27595	In a specific scenario, Magic xpa Runtime crashed when random buttons were clicked multiple times and when the Selection table property of the task was set to 'Yes', and when GetParam() function was attached as an expression to Window Type property of the form.

#	Description
MXPA-27689	In a specific scenario, when the Program Name was longer than 76 characters and when Find Reference was performed on program objects, then Magic xpa Studio crashed.
MXPA-27728	While working with MSSQL, when a context was terminated abnormally, the transactions created by it were left open along with the record locking resources. The same are now being released by canceling the active commands in such a situation.
MXPA-27764	In a particular scenario, Magic iOS Client crashed with exception EXC_BAD_ACCESS (SIGSEGV) when clicking on an Edit control and waiting for a while. It was observed that the crash happened only on iOS version 15 onwards.
MXPA-27784	When MailFramework=J, then the function MailMsgHeader() with any specific header-key did not return the value of corresponding header segment.
MXPA-27816	When the Environment Variable COR_ENABLE_PROFILING=1 was added, then the RIA desktop client crashed with the Event Viewer displaying the error: 'The application requested process termination through System.Environment.FailFast(string message).'
MXPA-27920	The function VecSet() raised in component application to update a host vector variable did not work if the vector variable was passed as a reference to the component.
MXPA-27953	The Date-type variables were not getting updated when a Date-type virtual variable's Null default property was set to 'Yes' and when the function DNRef() was used to retrieve the reference to the .Net variable.
MXPA-27955	In case of JSON Data Source although the Foreign Keys and Relationships tabs are unavailable, it was found that on pressing Ctrl+Tab keys it was possible to switch to the 'Foreign Keys' and 'Relationships' tabs.
MXPA-27986	The Unicode characters in the Mail functions MailMsgFrom(), MailMsgTo(), MailMsgCC(), and MailMsgReplyTO() were getting displayed as garbage.
MXPA-27994	When an ECF of an Online application having Invoke UDP was executed from the Tools menu, then the Subform in the application was not getting refreshed as expected.

#	Description
MXPA-28012	The error-code mentioned in Magic xpa Help topic for MailError() function needed explicit mention of error-codes returned from either MailLastRC() function or any Mail function.
MXPA-28017	If an Android device had two profiles then while working within one profile it was not possible to upload an image from another profile.
MXPA-28036	If a node in a Tree control was selected and dragged quickly, and another nearby node was hovered over, then the hovered-over node was getting dragged.
MXPA-28055	When router links were clicked multiple times, the program output was not getting displayed in Router outlet.
MXPA-28064	The details about Link Joins in case of Evaluate Link set to either Task or Records were required to mention in Magic xpa Help, which are mentioned now.
MXPA-28082	Magic xpa Studio crashed when APG was performed on any simple Direct SQL command such as 'Select *...' when Direct SQL is selected manually from the drop-down in Dataview.
MXPA-28097	When MailCharset was set to UTF-16 (or anything other than UTF-8) in Magic.ini before sending a mail, then it was found that the received mail used UTF-8 and not the originally set Charset.
MXPA-28098	In a Web Client task, a Checker warning was expected to appear regarding the records of Real datatype fields before Locate not displayed when Web styles were set to either Repeatable Items or HTML Table.
MXPA-28107	While executing a Web Client application, a runtime error occurred sporadically: 'Unexpected error on transaction commit: Please contact to your system Administrator', on repeating certain scrambled xml request containing '<' as its first character, which is considered as illegal.
MXPA-28117	While executing a Web Client task, compilation errors were found in console if .Net events were defined in the Main program.
MXPA-28118	The mention of Oracle 18 XE and Oracle 19 XE only supported in a limited manner was missing in Magic xpa documentation, which is fixed now.

#	Description
MXPA-28119	While executing a Batch task with the property Keep created context set to 'Y', it was found that on terminating the context from Broker Monitor, the context was still displayed under the Context List.
MXPA-28136	The details about unique ID (UID) were required to mention in Magic xpa help topic MailMsgId, which are mentioned now.
MXPA-28137	While working with Oracle DB and using DSQL, when DSQL_STRING_BIND_VARCHAR flag was set to 'Y', it was found that a Hebrew string parameter appeared gibberish when it was sent to procedure by binding (~) and as an expression.
MXPA-28145	While executing an Online task with Pervasive Actian Zen 14 DB, when a Date field (that is part of a Datetime pair) followed by an Integer field were defined with Range on both the fields, the following error occurred: 'DB Error - \[Zen]\[ODBC Client Interface]\[LNA]\[Zen]\[SQL Engine]Restricted data type attribute violation.'.
MXPA-28179	In a RIA, Control Verification handler was erroneously getting executed when Exit event was raised on a Button from a Subform, when the Subform was placed immediately after the control although the control's value was unchanged.
MXPA-28201	In a specific scenario, Magic xpa Studio crashed sporadically when Debugger was active, and the program being debugged had Form Input operation and called another program.
MXPA-28203	It was found that when Destination property was not set and Outlet name was specified, Routing did not work (correct behavior) but it worked erroneously when Destination property was set and Outlet name was skipped.
MXPA-28207	In a setup where an external numeric keypad is attached to a laptop, if SpecialKeyboardBuffering was set to 'E' or 'X', Num Lock of the external keypad was ON, then on typing the keys of an external keypad speedily, it was found that the main keyboard's Num Lock was getting turned ON some times.
MXPA-28212	It was found that the Spinner did not appear when a long Batch task was called from an Online or a Rich Client program.

#	Description
MXPA-28225	If a program in its Subform or via Routing called a Web Client program that had a Table containing data with decimal values, then the following error occurred: 'Cannot read properties of null (reading 'getForm')...'.
MXPA-28226	In a Web Client task when a numeric variable was defined with its Null allowed and Null default properties set to 'Yes', then it was found that the variable held and stored the default value instead of Null.
MXPA-28275	When a cookie from any external website or application already existed, and if at that point a Web Client application was executed that added a cookie, then it was found that the function DeleteCookie() did not work to delete the newly created cookie.
MXPA-28295	In a RIA, the called program's window unduly went behind the Main Program with Window Type SDI, if Force Exit User event was raised, a program was called in Block Else, which in turn called a Modal program into a Subform control.
MXPA-28310	When the system locale was set to Hebrew, and the Edit control's Format property was set to '1H' (no Hebrew), then the Hebrew keyboard was being allowed first time on execution of Runtime.
MXPA-28319	In a specific scenario, Magic xpa RIA Server was found to crash.
MXPA-28402	Calling a parallel program, closing the same, and then clicking on the background of the MDI form threw an unhandled exception with the following error: 'Unhandled exception has occurred in your application...'.
MXPA-28405	When two different users were checking-out the same program in Magic xpa, the following unexpected message was shown: 'object is checked out to some other users. Only one user can have an object checked out. Application will be closed.'. Also, undoing the Check-out was not possible.
MXPA-28411	In a Web Client application, when an Edit control had a numeric variable attached to it, then it was found that the value 0 (zero) was getting stored if the variable's Null allowed and Null default properties were set to 'Yes' and when the variable's value was deleted at the client side.

#	Description
MXPA-28419	In a Web Client task, when SetCookie() function was executed with numeric value, the following error occurred in console: 'TypeError: cookie_value.trim is not a function...'.
MXPA-28442	In a specific scenario, Magic xpa Studio was found to crash sporadically while debugging the project.
MXPA-28447	When DataTypeCompatibility=Y was used in MSSQL DB information and the property SQL Type=DATETIME was set for the Date column, then the DB issued the following error: 'DB Error-Invalid input parameter values. Check the status values for detail.'.
MXPA-28453	In Online & RIA, the Font property of Label control was not getting inherited according to its Model. The property was broken when a variable was dragged and dropped on the Form and when the Form was generated.
MXPA-28462	On zooming into the Event list from Form Editor/Push Button event, the control was not parked on the expected entry if a component was available in CRR.
MXPA-28483	Browser Control was not getting displayed while trying to open a particular website with a login dialog inside it.
MXPA-28552	In Web Client tasks, the Angular function mg.CheckIsReadOnly always returned an incorrect value 'True' for choice controls, irrespective of the control's Modifiable property in Magic xpa.
MXPA-28596	In a Web Client task, the Table control's Control Name was getting changed to default on adding or deleting any variable to it.
MXPA-28598	The function MnuToJson() did not create .JSON file when it was evaluated in a standalone Batch task.
MXPA-28613	Opening the Form Designer created duplicate .Net controls and on right-clicking on them threw an exception, 'System.NullReferenceException: Object reference not set to an instance of an object...'.
MXPA-28639	The function mg.getMustInput() returned False when the Edit control's Required property was set to True and the function returned True when the same property was set to True using an expression.

#	Description
MXPA-28646	When the Parallel execution and Copy global parameters options were selected and the Subtask's End task condition option was selected, then while creating a new record in the Parent, the Subtask kept displaying one previous record before the newly created record of the Parent task.
MXPA-28657	In a specific scenario, Magic xpa Runtime was found to crash when the fields of type Blob or Rich Text were edited in the called RIA task.
MXPA-28754	If a Form containing a large number of controls was duplicated then overwriting the original Form with the duplicate one lead to attaching incorrect expression to a Combo Box or losing its Field Ranges.
MXPA-28760	It was found that large-sized .OPT files took a long time to open thereby slowing down opening the projects from Studio.
MXPA-28772	If a Web Client application contained a Subform with its Connect to property set to 'No', then the program which was called in the Subform was not getting displayed if the call was made immediately after setting the Subform's Visible property to TRUE.
MXPA-28792	In a specific scenario, RIA Server crashed.
MXPA-28823	Magic xpa Runtime crashed sporadically while switching to Runtime if an expression for Width and Height both were set to the Main Program form.
MXPA-28824	In a specific scenario, Magic xpa did not display any error about prohibiting creation of multiple records and crashed while creating second record in a JSON DB.
MXPA-28827	Multiple links about Magic xpa Application with Angular are merged into one single link named 'How Do I Upgrade Web Client Applications using Latest Angular Version?'.
MXPA-28839	In a Web client task, it was not possible to implement the Date Picker with a non-default language at the project level.
MXPA-28857	When multiple programs were executed recursively, then with Window Type=SDI and Open task window=No, the called program's window erroneously appeared behind the caller program's window.

#	Description
MXPA-28862	In a Web Client program, if a field in a specific row of the Table had an expression attached to its Format property, then that expression was getting evaluated and applied to all the rows of the table.
MXPA-28863	While using Btrieve DB, if BLOB variables in multiple records were updated using Link Write operation, then the columns not selected in the Dataview were getting updated with the values from the first Record.
MXPA-28875	When only one column of type JSON was defined, then the following checker error occurred: 'Table may not contain only blobs'.
MXPA-28880	For a JSON DB Table, when the number of characters in the Table name are more than the number of characters in the Data Source name, then the Root element's name in the .JSON file was found to be trimmed.
MXPA-28918	The mg.CheckIsReadOnly function returned 'True' in case the control's Modifiable property was set to 'True', thus behaving opposite to its name.
MXPA-28920	In a Web Client task, when an invalid number (out of the predefined format limit) was entered and when the currencyMask was removed from the input tag in .HTML file, then it was not possible to move out of the numeric field.
MXPA-28931	The function JSONInsert() failed if tried to insert a non-array type JSON object into a JSON Data source while passing the key value as a parameter.
MXPA-28936	It was observed that the DBMS properties were not getting updated in Magic.ini on changing the values of DBMS Properties from Magic xpa Studio menu Options > Settings > DBMS > <Press Alt+Enter on a DBMS name from the list > DBMS Properties.
MXPA-28946	In a RIA, if a record was modified and then deleted, the Record Suffix executed in Modify mode and then executed in Delete mode. But on cancelling the Delete operation, it was observed that RS was again executed in Modify mode erroneously.
MXPA-28953	The error 'Duplicate Index' didn't occur while editing a duplicate value in the Unicode field of JSON DB; it erroneously occurred on re-performing the APG (Ctrl+G) on the Data Source.
MXPA-28970	The Runtime Form Designer froze when a Browser Control was used on the form.

#	Description
MXPA-29017	JSON Data was not getting displayed in the order of the 1st index under multiple scenarios such as on executing APG after opening the project, executing the project in Runtime, and executing APG after modifying the Table index.
MXPA-29175	In a specific scenario Magic xpa Runtime was found to crash due to accessing invalid memory.
MXPA-29211	In Web Client tasks, it was not possible to call an Interactive program from the Record Suffix of a non-interactive program.
MXPA-29221	In a specific scenario, Magic xpa Runtime crashed when the parameter passed to the SetParam() function had the string 'environment' in it.
MXPA-29260	When DBMS Logging was set for PostgreSQL gateway (any level) but the ExternalLogFileName parameter was set to blank, even then the log file MgPostgres was getting created in the project folder.
MXPA-29330	In a specific scenario, Magic xpa Runtime engine crashed and suspended its execution in Linux environment.
MXPA-29334	The return value from the Child task was getting displayed in the first row of the Table in the Parent task when a non-Interactive task with a .Net parameter was called before updating the record.
MXPA-29588	In a specific scenario, Magic xpa Studio crashed on zooming from the Main Table or a Link Table's Column if the Table was from a component and the host project had many tables.
MXPA-29655	The function JSONGet() returned incorrect values for numeric data containing 9 or more digits.

Magic xpa 4.8.1

We are delighted to present 4.8.1 update with new enhancements.

Studio Enhancements

The following feature is added with respect to Magic xpa Studio enhancement.

New Special Flag: SpecialInitialExpandAll

A special flag named **SpecialInitialExpandAll** is introduced, which enables you to define the initial expanded/collapsed mode for all the headers. On setting this flag to 'Y', Magic xpa Studio expands all headers (Blocks/Links/Event handlers, etc.) for the first time you open the program in studio.

Valid values: Y, N

Default value: N

Web Client Enhancements

The following features are enhanced with respect to Web Client.

Angular 13 Support

Magic xpa Web Client was tested and is compatible to work with Angular 13.

Note: In Angular 13, the folder name inside the dist folder is of 'kebab-case' (hyphenated).

New Angular Function: mg.getColor()

An Angular function named **mg.getColor()** is introduced in Magic xpa, which enables you to retrieve either foreground or background color from Magic xpa's color file by providing its color number.

Important note: This function is only usable if the Angular Client has Magic color numbers available and the function needs to set colors according to these numbers, which is not usually the case. You need to deploy the color file into the Assets folder for this function to work.

JSON Support

The following features are provided with respect to JSON support.

New Menu Option: Show JSON View

Magic xpa provides a new menu option named Show JSON View, which upon clicking displays the JSON structure of the JSON table on which the control is parked. The JSON structure is shown in a tree format.

Support to Drill-down into JSON Table Structure

If JSON Definition property of JSON field:

- **contains index of the shared database:** then zooming on that field displays only that particular DB entry.
- **Is empty:** then on zooming on that field Magic xpa creates an inner table of type JSON and parks on the newly created JSON DB. The inner table inherits its name from the field name. This is the entry which is referred to as a 'Private' table.

Note: Private tables are invisible from the Data Repository. The zoomed JSON DB entry is read-only and you can only edit its allied fields.

Zoom Button to View Private Tables

A zoom button is provided on the **Data Source List** dialog for JSON Data source. It enables you to view all the Private tables defined under a Shared table.

Note: Zoom button is disabled for Component JSON tables, and if multiple data sources are selected from Data Source Pick List.

Conversion of Private Tables to Shared Table

On zooming on the JSON Definition property of a JSON table in the Data Repository, Magic xpa enables you to pick up a Private table, which you can convert into a Shared table after you save the changes done in the table structure. The resulting Shared table becomes visible in Data Repository.

Important note: In general, if you already have defined a JSON Data Source, then you need to Export/Import it into 4.8.1 to be able to execute your application(s).

New Functions to Enable you Work with JSON Documents

Magic xpa introduces the following functions as a part of JSON support:

- **JSONCnt():** Returns the number of occurrences of a JSON object of type array from the JSON source variable.
- **JSONDelete():** Deletes a JSON object/array from the JSON source variable.
- **JSONExist():** Checks if a JSON object/array is present in the JSON source variable.
- **JSONFind():** Finds the JSON object/array from the JSON source variable.
- **JSONGet():** Returns the value of a JSON object/array from the JSON source variable according to its path.
- **JSONInsert():** Inserts a JSON object/array into a JSON source.
- **JSONModify():** Lets you modify the value of a JSON object/array.

Please refer to Magic xpa help for details of the functions.

Git Connectivity and Support Enhancements

The following features are provided with respect to Git connectivity enhancement.

Support to Compare Current Branch with Local Branch

Magic xpa provides you a new menu option named **Compare branch with...** to compare the current branch with any local branch of your choice. The result of comparison is displayed in terms of object names and the name of the person who committed the changes most recently in the current branch.

Note: Only the objects pertaining to an open project are displayed under Object name list.

Middleware Enhancements

The following features are provided with respect to GigaSpaces enhancements.

Support to Restart Project Gracefully from CLI

The existing option Restart Project Gracefully is now provided to be used from the CLI.

Support of Java SE 11 with GigaSpaces

Perform the following steps to execute Java 11 with GigaSpaces:

1. On installing jdk 11, set the path of jdk11 for java_home in the setenv.bat.
2. Set the path of jdk11 for java_home in the settings.xml of monitor as well as in the scripts.
3. Download the following jar files which are needed to deploy magic application.
 - jaxb-impl-2.1.jar - <https://mvnrepository.com/artifact/javax.xml/jaxb-impl/2.1>
 - jaxb-runtime-2.3.0.jar-<https://mvnrepository.com/artifact/org.glassfish.jaxb/jaxb-runtime/2.3.0>
 - activation-1.0.2.jar - <https://mvnrepository.com/artifact>
 - jaxb-api-2.3.0.jar - <https://mvnrepository.com/artifact/javax.xml.bind/jaxb-api/2.3.0>

Note: You will need these files only if you are using GigaSpaces.

4. Copy these jar files into ..GigaSpaces-xpa\lib\xpa\ folder.
5. Remove the following options under EXT_JAVA_OPTIONS from setenv.bat file:
 - "-XX:+UseParNewGC" - Remove the mention as a replacement is not available.
 - "-XX:+UseConcMarkSweepGC" - Remove the mention as a replacement is not available.

Migration Enhancements

The following migration enhancements are added in Magic xpa.



Edit Control's BG Color Migrates Correctly

On migrating a uniPaaS application to Magic xpa, it was observed that when the Edit control's Style property was Windows-3D in uniPaaS and when the control's default BG color was inherited, then the control's default BG color did not appear correctly in Magic xpa. This behavior is fixed now.

General Enhancements

The following general enhancements are added in Magic xpa.

Java SE 11 Support

Magic xpa was tested and is compatible to work with Java SE 11.

Fixed Issues

#	Description
MXPA-25386	When DefError was set to HTML file with 'Unicode' or 'UTF-16 LE' encoding charset, then MGrqispi.dll was found to crash with the mention of w3wp.exe in the Event Viewer log.
MXPA-25654	The value of array sizes displayed for DSQL tasks with MSSQL DB and Oracle DB in the gateway log were not same due to the way each DB calculated the number of records. The mention of the rows fetched is now removed from the log.
MXPA-25829	While working in Form Designer by following the menu Tools > Customize > Keyboard..., when a command was chosen to see its associated shortcut keys, and when the 'Shortcuts for selected command' were removed and reset again to default, Magic xpa didn't restore the removed shortcuts.
MXPA-25882	If a record is created above nth line (Create Line Above, Shift+F4) then on cancelling the recent record creation (Ctrl+F2) didn't cancel the intended action but moved the newly appearing record at the n+1 line.
MXPA-26020	In a particular scenario of a Web Client program where an Edit control was updated with some text followed by canceling the operation, then the Confirm Cancel operation dialog was not shown although the Confirm Cancel property was set to Yes in Task Properties.
MXPA-26060	When MSSQL Alpha datatype was stored as 'String Memo', then it was found that the data created in uniPaaS and the one created in Magic xpa

#	Description
	were different. Also, while attempting to modify the existing data created in uniPaaS, Magic xpa issued an error: 'Operation failed, record has been changed by other user'.
MXPA-26197	A Table control column's color was not getting displayed in the printed .pdf file on setting 64BitEngineForStudio to 'Y'.
MXPA-26203	The following information was required in Magic xpa documentation: If a Table control contains more than 150 columns, then columns beyond 150 are not displayed correctly. This behavior occurs due to limitation of Windows operating system. The help topic is updated now.
MXPA-26229	While executing a Batch task it was found that the timer event was erroneously getting executed for additional number of times before the occurrence of the next timer event.
MXPA-26237	In a specific scenario, when CHECK_KEY was set to 'Y' in Database Information (SQL tab) of Database Property, Magic xpa crashed.
MXPA-26286	In a specific scenario Magic xpa crashed sporadically due to an unhandled exception. This bug was fixed in 4.8.
MXPA-26314	When multiple programs were executed parallelly and a couple of their windows were minimized, then on minimizing and restoring the main application window, the screen flashed. Also, the Edit controls in the minimized runtime windows were found to be changing if an Edit control in the maximized runtime window was modified.
MXPA-26430	In a RIA task during Runtime, the Right-side border of the Check Box controls turned invisible when the Check Box width was lesser than or equal to 2.250 Dialog units.
MXPA-26432	At Runtime, some delay was observed while displaying data when static controls were attached to a Table control and Form units were set to one of the three options: Centimeters, Pixels, or Inches.
MXPA-26455	In a RIA task, the 'Width' property of a Form when set to a value less than 3.17cm was automatically getting changed to 3.17cm.
MXPA-26470	Magic xpa installation threw the error: "Current name of your computer is: 'STRACE_W10SC_DB' This name includes the character '_' which is a forbidden character for license server name. Please replace your computer

#	Description
	name in order to install license server.", and expected to change the computer name. The bug is fixed by removing the dialog box.
MXPA-26485	While executing a program having a Form with its Startup Position property set to 'Centered to Desktop' in dual-monitor environment, it was found that although the program window was moved on 2nd monitor, the program continued to display on the primary monitor.
MXPA-26528	In Online and Rich Client tasks when the Allow Scaling property was set to 'False', the scaling value (100%) was unnecessarily visible in a disabled form on the Status Bar.
MXPA-26556	In a specific scenario, Magic xpa crashed while closing Expression Editor when invoked from I/O repository and when the I/O device belonged to the parent task.
MXPA-26562	The Stored Procedure CRR created by xpa contained an extra space character when specifying argument placeholders like ':1' instead of ':1', resulting in losing one character from the end when data was passed using this argument passing format.
MXPA-26665	Unlike the correct behavior in uniPaaS, in Magic xpa when the Checkbox of the next record was clicked, it was found to be changing erroneously along with the error message that was handled in Record Suffix.
MXPA-26803	While executing a RIA with MSSQL DB, the changes were not reflected in the table after modifying a record, when it was attempted to delete before modification.
MXPA-26857	When a number of records in Task window were multi-marked and Print Preview window was invoked, then upon pressing the pg up key on the Print Preview window performed the same action repeatedly on the multi-marked records.
MXPA-26981	When the SpecialKeyboardBuffering flag was set to 'E' and two programs were executed parallelly while one of them containing a lengthy Batch task, it was impossible to enter any keystrokes for the other program.
MXPA-27006	At runtime, when an open Form was minimized, and attempted to open from the Window menu, the Window menu did not restore the Form back to open state.

#	Description
MXPA-27058	When ColorSet() and FontSet() functions were used in a Batch task, Magic xpa crashed and logged the following error in to mgerror.log: '[Error] - \[MgGui.dll] Exception while evaluating : 660 →Object reference not set to an instance of an object.'
MXPA-27083	The text assigned to a Label control that was placed on a Tab's title area was not visible when Tab Width was set to 'Fixed In Line' and when a Title color was assigned to the Tab control.
MXPA-27089	While navigating the tabs in a Tab control using keyboard, the Control Hit event was observed to be getting raised in Rich Client tasks but not in Online tasks.
MXPA-27091	On assigning a logical name to Image List File Name property of a Tree control and then on expanding/collapsing the tree nodes, Magic xpa Studio issued an error: 'Width of the image strip must be a positive multiple of ImageSize.Width. Parameter name: value'.
MXPA-27114	While migrating an application from uniPaaS to Magic xpa, the IMP.log file and the Upgrade Manager were observed to contain an incorrect mention for the event 'View by Key' as being unsupported, when it is actually supported in Magic xpa.
MXPA-27236	The package '@magic-xpa/cli' should have been defined only in devDependencies but erroneously it also appeared in production dependencies. Due to this duplicate definition, Angular issued the following warning during installation: 'input\\nodejs.lognpm WARN The package @magic-xpa/cli is included as both a dev and production dependency.' The bug is fixed by keeping the definition in devDependencies only.
MXPA-27280	DSQL Binding with negative numeric parameters was found to be not working with Oracle DB.
MXPA-27318	Record was not getting fetched correctly when Transaction mode was 'Within active trans' and Transaction begin was 'Before task prefix'. It was required to add an extra Update operation under Record Suffix/Group Suffix to fetch the record correctly.
MXPA-27323	If a number of Edit controls with Zoom button were placed in a container control, then while opening Runtime Form Designer, the following error was displayed for each such control: 'try to use control that didn't created'.

#	Description
MXPA-27332	It was observed that when a control was double-clicked, the Control Hit handler was erroneously getting executed twice in Magic xpa instead of getting executed only once as in uniPaaS.
MXPA-27343	Batch programs were found to execute too slow in xpa as compared to xpa 3.3 in a particular customer's application, which occurred due to re-compilation of the .Net snippet code during each call to the task.
MXPA-27349	The Unicode characters in Items List were not getting displayed according to the Autocomplete Mode property of the Edit control.
MXPA-27351	While executing a RIA, if SpecialKeyboardBuffering flag was set to 'E' and mouse was hovered over Edit control, the cursor was observed to flicker in an unusual manner.
MXPA-27364	Unable to change the Task type from Online to Rich Client, when a model from a component was attached to a variable and that variable was assigned to a control placed on the Form.
MXPA-27401	The numeric values containing decimal point (float) and negative integers are observed to be getting stored in JSON file incorrectly.
MXPA-27446	In a Web Client application, a Custom Validator error message was being issued for an invalid date value in a record and also for all valid date values from other records.
MXPA-27481	When the Automatic Tab Order property was set to 'False', it was not possible to enter a higher tab order number than the existing highest one for a control, manually. Magic xpa allowed a tab order number only as high as the number of controls on the form.
MXPA-27488	When a Web Client program contained multiple Route hyperlinks and when those links were clicked rapidly multiple times, the output of the program was not displayed in the browser.
MXPA-27526	When an Online program, containing a Class 0 form and two Class 1 forms with the default form having at least one control on it, was attempted to convert to a Web Client program, then the conversion did not take place.
MXPA-27529	In an RC task, when AllowEmptyDataview property was set to 'Yes' and when attempting to locate a record from the linked table, the

#	Description
	EmptyDataview was getting set resulting in the cursor not being able to move out of the parked Edit Control.
MXPA-27535	Multiple erroneous behavior was spotted when an application was migrated from uniPaaS to Magic xpa. In Magic xpa, the cursor was not moving when clicked anywhere between the numbers in an Edit control unlike in uniPaaS. It was not possible to select the entire number from the Edit control and the Context Menu was not available on right-clicking the mouse.
MXPA-27559	When System Logon was set to 'None' and when the user was logged-in as a 'Supervisor', then the function UserRightGet() displayed garbage characters.
MXPA-27569	In a specific scenario, memory leak occurred while executing a DSQL task having Oracle table.
MXPA-27575	In a specific scenario having SystemLogon set to either None or ActiveDirectory, and a Magic xpa component was loaded having its Rights exposed, then evaluating the UserRightGet() function resulted in Magic xpa Runtime to crash.
MXPA-27579	A Label control in uniPaaS with Static type set to 'Rect', Border style set to 'No Border', and Style property set to '2-D' when migrated to Magic xpa showed no border instead of 2-D border as in uniPaaS.
MXPA-27582	It was observed that on performing Checker operation on an Online task containing DNCast() function, Magic xpa issued an error: 'EP0319: Invalid casting from value to .NET Type: Task Prefix\\...'.
MXPA-27583	In an RC task with Initial mode as 'Create', it was observed that Link was not getting recomputed after a Verify error operation when Force Exit event was raised with either of the following values: 'Control', 'Pre Record Update', and 'Post Record Update'.
MXPA-27623	In a specific scenario, when a context was terminated from Broker Monitor while a Batch task with a delay in its Task Prefix was executing, the RIA server crashed.
MXPA-27638	When a Delete statement was used in a Stored Procedure with CURSOR=Y flag set, MSSQL DB issued an error: "A server cursor cannot be opened on the given statement or statements. Use a default result set or client cursor."

#	Description
	The erroneous behavior occurred when there was a space missing before the flag CURSOR=Y.
MXPA-27658	In a specific scenario of Japanese OS by following certain steps, it was observed that the cursor was getting parked on an Edit control although its Allow Parking property was set to 'No'.
MXPA-27676	In case of a Rich Client task, the contents of a Browser control were not displayed at Runtime when the Browser control was attached to a Tab control.
MXPA-27687	When checker was invoked from Studio by F8, the errors were not displayed in the Checker result pane whereas by creating a Background Checker, the Checker results were created in the Checker output file.
MXPA-27726	In a specific scenario, while executing a Batch task having Link Query on PSQL DB, Magic xpa crashed sporadically.
MXPA-27728	While working with MSSQL, when a context was terminated abnormally, the transactions created by it were left open along with the record locking resources. The same are now being released by canceling the active commands in such a situation.
MXPA-27739	In Web Client tasks, if the default Control Name for a control was changed and Fit Control Size icon was clicked, then the changed Control Name was erroneously getting restored to the default name.
MXPA-27763	In a specific scenario, Magic xpa RIA Server was found to crash.
MXPA-27798	In a specific scenario, when a Link operation was added in the Dataview, Magic xpa Studio terminated unexpectedly.
MXPA-27853	Zooming by double-clicking on an Edit control closed the called task immediately when the special flag SpecialDoubleClickIdentify was set to 'Y'.
MXPA-27860	When a .NET control with ActiveX wrapper was placed on a Form, the ActiveX window was displayed blank on the .NET control.
MXPA-27878	On Hebrew OS, while working with Oracle DB it was observed that when a Hebrew string was passed as a parameter to a stored procedure either using binding (~) or as an expression, DSQL returned garbage.

#	Description
MXPA-27879	As Android SDK is deprecated as a standalone offering and clubbed with Android Studio, the documentation related to it was required to update, which is updated now.
MXPA-27937	It was observed that the .opt file was not get updated while performing Expand/Collapse operation in the Logic unit of a Module's Task when the Module was added to the project.

Magic xpa 4.8

We are delighted to present Magic xpa 4.8 with new features and enhancements.

Studio Enhancements

The following features are provided with respect to Magic xpa Studio.

Ease of Variable Identification

Magic xpa provides you variable ID(s) in the Data View and Logic View tabs so that you don't need to switch between the tabs and the Expression Editor while working with variable(s).

No XML Source Updating on Expand/Collapse

The **Expanded** tag for Data View and Logic Unit is removed from XML source files and the information related to the tag is stored in the .OPT file so that the XML source files are not modified after Expanding or Collapsing. For all the upgraded programs the presence of the tag in the XML source files maintains backward compatibility.

Description of User-defined Functions

The details of a user-defined function with comments are displayed in the following manner. If the function is defined

- **in a Component:**
 <component_name>.Main Program: <comment>
- **in the Main Program:**
 Main Program: <comment>
- **in Parent task/Subtask:**
 <Parent_Task_Name>/<Subtask_name>: <comment>

By providing the details as such, Magic xpa enables you to know the context of the user-defined function definitions.

Import uniPaaS/xpa xml File into xpa Project using Command Line Upgrade

Magic xpa now enables you to import an xml file of uniPaaS OR xpa older version into an existing xpa project (.edp) without having to open the Studio. You can accomplish it using the following command:

MgxpaStudio.exe /UpExport = <Export filename>, <EDP filename>

Where:

- the first argument <Export filename> is the existing xml of uniPaaS/xpa created in the specified folder
- the second argument <EDP filename> is the existing edp filename into which the export file of old version (the first argument) is imported

A Warning Message in RIA is an Error Message in Web Client

The Checker message '**Server side functions cannot be directly assigned to a property of a control**', is a warning in case of RIA whereas the same is an error in case of Web Client applications.

UI Enhancements

The following features are provided with respect to UI.

New Property: Wrap Text

A new property named **Wrap Text** is added for Group control, which on setting to 'Yes' makes the text in the Group control fit within the allocated width of the control.

Browser Control Inherited from CefSharp

The browser control in Magic xpa is implemented using CefSharp Browser Control. You can raise an external event with the Browser control implemented using CefSharp Browser control by replacing the line 'window.MGExternalEvent(msg);' with the line 'CefSharp.PostMessage(msg);' in the html file.

Default Font for Edit Control's Zoom Button

Magic xpa enables you to select a font you prefer and set it as default for Zoom Button. The change of font is effective immediately and it applies throughout the application.

Web Client Enhancements

The following features are provided with respect to Web Client.

New Function: MnuToJson()

A function named **MnuToJson()** is introduced to provide a JSON file that describes all the visible menu entries corresponding to the menu structure at Runtime.

Storing Cookies in Browser

Magic xpa provides the following three functions to enable you to use cookies in your browser:

3. **SetCookie** - Sets a cookie in the browser
4. **GetCookie** - Retrieves the value of a particular cookie
5. **DeleteCookie** - Deletes a cookie

Control Naming during Task Type Conversion

When Online/RC tasks are converted to Web Client tasks, Magic xpa converts control names from Online/RC tasks in such a way that you can uniquely identify the control names in Web Client tasks.

- If variable is of type Virtual/Parameter/Column and if the control doesn't have a name, then the control name is prefixed with **V_** or **P_** or **tablename_** respectively.
- If APG is performed on Tables and Web Client program is generated, then the Form controls are generated as **tablename_variablename**.
- In case of duplicate controls such as a Table and a Variable with the same name, the converted control name becomes **tablename_variablename_001**, **tablename_variablename_002**, etc.

Zoom Button for Edit Control

You can add a **Zoom** button [...] next to the Edit control, which on clicking raises a Zoom event. You can also customize the Zoom button's look. If an Edit control of an Online/RC task had a Zoom Button handler then on converting the task to Web Client, the **Show Zoom Button** property is set to 'True'.

Recommendation to Convert Non-interactive Task to Batch

In case of a non-Interactive Web Client task while parking on the Task type, Magic xpa recommends you to convert the non-Interactive Web Client task to a Batch task if the task:

- contains no Call operations
- contains Call operations to Batch tasks only

Provision of Modify in Query Property

Magic xpa provides **Modify in Query** property in Screen Mode for the controls that are placed outside a Table control. The property is disabled in Line Mode.

Provision of Expression for Edit Control's Format Property

Magic xpa enables you to attach an **Expression** to the **Format** property of an Edit control.

Provision of Select Program Property

Magic xpa provides **Select Program** property for Edit controls.

Built-in Support of ngxCurrency

Magic xpa Studio now supports **ngx-Currency** third party package. With this built-in offering, the following are available:

- Numeric picture directives
 - Negative
 - Commas
 - Left Justify
 - Zero Fill
 - Negative sign and
 - Positive sign
- Support for dynamic change in **DecimalSeparator** and **ThousandSeparator** INI entries

Autocomplete for Edit Control

The property **Autocomplete Mode** is supported in Web Client tasks with the options 'True' and 'False' as follows:

- On setting it to 'True' the Item List is available in `mg.getItemListValues()` of the Edit control
- On setting it to 'False', the Item List becomes unavailable

Autocomplete feature comes with filtering. When you enter a character or a string in the Edit control, Magic xpa returns the list of only those options from the Item List, which contain the character/string you entered.

New Menu Property: Outlet

Magic xpa provides a new Menu property named **Outlet**, which indicates a place where the desired Web Client program is executed. This property enables you to create a JSON from the menu structure to be used in Angular.

Special Characters Filtered in Web Client Task Names

While converting Online/RC Tasks to Web Client Tasks, if the prior types of Tasks had special characters in their Task names then you will find the latter's Task name without any special characters. Means, if an Online/RIA Task name is 'MyApp1@' then after converting the task to Web Client Task type, you will see the Task name as 'MyApp1'.

Note: The special characters '_' and '\$' are valid in Web Client Task Names.

New Function: RouteGet()

A function named **RouteGet()** is introduced to retrieve the last route path excluding host server name which was sent to Magic xpa engine along with the route parameters.

New Keyword: ClientContextInactivityTimeout

You can use the keyword named **ClientContextInactivityTimeout** to set the Client context timeout in Magic.ini or from CLI.

Context Handling

Magic xpa introduces an Environment setting named Client Context Inactivity Timeout.

You can set the value of Client Context Inactivity Timeout (measured in 10th of a second), on completing which the context will be terminated.

You can raise the **Context Remove** event using Raise Event in the Task Suffix to indicate the timeout count-down.

Default Window Type is Overlay for Non-interactive Tasks

For non-interactive Web Client tasks, Magic xpa changes the Window Type property of the form to **Overlay** if:

- the Web Client task is changed to non-interactive from interactive
- the Web Client task is created by converting from a Batch or RC non-interactive task

Note: For any existing non-interactive Web Client tasks that already had Window Type set as Default, the Window Type remains the same.

Enhanced Lazy Loading

The programs present in the **Load on demand** folder can now be used as Subforms or Overlay window, if they are called from outside the folder.

Update and Block Operations in Route Event Handler

Magic xpa now supports **Block** (with If, Else, and End) and **Update** operations in Route Event Handler.

Material Design Grid for ISAM Data Source

The Web Style property option **Material Design Grid** is supported for ISAM Data source for the tasks having **Preload view** Task property set to 'Yes'.

Web Client Third Party Prerequisites

While installing the latest node.js version on a new machine you can avoid any issues that might arise by opting one of the following two options:

1. Install the latest node.js version (16 currently) and use the command: 'npm config set legacy-peer-deps true'.
2. Install a node.js version which is at the most 14 (minimum 12.0 recommended).

Note: We recommend the second option.

JSON Support

The following features are provided with respect to JSON support.

Magic xpa provides a means of defining structures for JSON using the data source repository.

New Attribute Type: JSON

A new attribute of type JSON is added for the following fields: virtual, parameter, and column. The attribute specifies the embedded JSON structure within a Data Source definition. A JSON column is provided with the following attributes:

- **JSON Definition** - Enables you to choose a JSON Data Source from the Data Source Repository and JSON Data Sources from the Components
- **Instance** - Specifies whether the JSON has a Single instance or multiple instances.

Note: The JSON attribute is invisible for SQL, ISAM, and XML database columns.

Support JSON Data Source

Default entry for JSON is provided in Database Repository, which on zooming into displays JSON data source list.

Once defining the structure of your JSON file, a program accessing the JSON data source should have a JSON source variable defined, so that the JSON data will be accessed from it.

New Property: JSON source variable

The JSON source variable column is available only for JSON sources. In this property you can specify a BLOB variable, through which you can transfer JSON data to and from a JSON file. The task reads and/or writes JSON data from/to this variable.

Runtime Enhancements

The following features are provided with respect to Magic xpa Runtime.

Logging Information about Tasks in Execution

Magic xpa introduces two functions:

1. **LogTaskExecutionStart(Filename, Sync):** On successful execution of this function, the Runtime engine starts logging the executing tasks-related information into desired log file given as filename. If the second argument Sync is 'True' then the data is flushed constantly and if it is 'False', the data is flushed once after the logging stops.
2. **LogTaskExecutionStop():** This function stops logging the information by closing the log file. The functions are intended to create a clear Runtime Task execution tree which can help when you need to migrate only a part of application.

For your convenience to know the errors logged into the recently created log file, Magic xpa notifies the external log filename in mgerror.log.

Logging Information about Deferred Transactions

For all types of deferred transactions, the external log file includes the following information:

- Start and Stop details of the task
- Transaction Cache Type
- Transaction Cache ID
- DMLs entering the Transaction Cache
- DMLs leaving the Transaction Cache
- Error for Transaction Cache while sending the DML to a database

The external log file provides information on all database types.

Provision to Define External Log File Size

Magic xpa provides an option named **External Log File Size**, which you can set to divide the entire log file into smaller, manageable files of the desired size specified in Megabytes.

Means, if you set the option External Log File Size to 2, then logging will continue into a file until the file size reaches 2MB. After the file size has reached 2MB, logging will continue into another file created with a different pid_date_time stamp.

The log file will be created in the format **<filename>_pid_yymmdd_hhmmssmil.log**, as in CustomerAction_11448_210916_125610827.log. The option can be passed as a parameter from **Logging()** function.

Database Enhancements

The following features are provided with respect to databases.

Native PostgreSQL Database Gateway

PostgreSQL database gateway is supported natively, which is compatible with PostgreSQL 13.0.

New Keyword: PostgreSQLDefaultOid

A keyword named **PostgreSQLDefaultOid** is introduced for compatibility to PostgreSQL <= 12 Server version.

- For PostgreSQL server version >= 13: There is no need to add this flag. It uses shortest unique key for Default position.
- For PostgreSQL server version <= 12:
 - if PostgreSQLDefaultOid = Y then it uses Oid for Default position

- if PostgreSQLDefaultOid = N or if the flag is not defined then it uses shortest unique key for Default position

New Property: Dataview result set limit

A property named **Dataview result set limit** is introduced for Batch tasks in the Behavior Tab of the Task Properties dialog, to which an expression can be assigned.

The expression is evaluated to a number that can be set per Batch task when there is a Main Data Source.

If the Batch task is in Modify mode, the locking strategy is Immediate, and if there is a Task-level transaction, then the Dataview result set limit expression is disregarded so that the SQL statement does not include the 'fetch first X rows only' clause.

Note: This property is supported only for Oracle Data Source.

Middleware Enhancements

The following features are provided with respect to middleware.

Distinct License Count Display for RIA and Web Client Applications

Magic xpa now displays the counts for RIA user-based license and Web Client user-based license separately under Current, Peak, and Max columns in the Broker Monitor. These counts are available when the applications are deployed through Magic xpa Studio.

Mobile Enhancements

The following features are provided with respect to mobile.

Android

Storage Enhancement

For Magic xpa Mobile applications executing on Android 11, Scoped Storage is mandatory. For more information, please visit the help topic: Home > Concept Papers > Developing Mobile Applications > Storage Enhancement in Android.

Android 11 Support

Magic xpa was tested and is compatible to work with Android 11.

Android-specific Functionality

Update the project target SDK and compatibility libraries to API 30: You need to upgrade Android SDK compatibility libraries to API 30 so that your custom applications developed for higher versions will work smoothly on your Android 11 devices.

AAB File Format Support

Magic xpa now supports building Android App Bundles (AAB).

Log4j Vulnerability Handling

Log4j version 2.5 was upgraded to log4j version 2.16 due to vulnerability [CVE-2021-44228](#) (also referred as Log4Shell vulnerability) and [CVE-2021-45046](#).

Log4j version 1.x was removed from the Axis2 installation due to vulnerability CVE-2021-4104 (see <https://nvd.nist.gov/vuln/detail/CVE-2021-4104>).

Browser Client Deprecation

In continuance to our previous notification regarding the deprecation of Browser Client (see Magic xpa 4.6 release notes), we are gradually withdrawing the support to it.

- **Support on Windows 11:** Browser Client does not work on Windows 11 at all.
- **Support on Other Windows OS:** Browser Client can run on other Windows OSs using MS Edge browser with or without the IE compatibility mode.

Fixed Issues

#	Description
MXPA-21621	When a Web Client task was created, its 'Open task window' property was disabled with default value 'Yes' but when the task was converted to Batch and again back to Web Client, the same property was found enabled.
MXPA-22921	While loading an XML Data source, if a Logical name was used in the Schema URL as a path, it was found that it immediately got translated, thereby losing the advantage of using a Logical name.
MXPA-24475	On launching Magic xpa Studio, the CPU utilization was observed to be very high.
MXPA-24509	The CPU percentage was found to be around 25% on launching Magic xpa Studio. The percentage was found to decrease on opening the Expression Editor or the Form Editor of any program or executing it.
MXPA-24597	When SpecialFirstRangeOnEmptyField flag was set to 'N' and a space character was given as a value in Range, then the space was not being recognized as a valid range in Magic xpa, unlike it was recognized in uniPaaS.
MXPA-24960	The SQL Where clause was not getting deleted on removing the Main Data Source.
MXPA-25413	If an Escape character was present in the Range condition (as in '1234 \ * 67890') then it used up one-char length from the Range condition, resulting in retrieving a wrong record '1234*6789' instead of '1234*67890'.

#	Description
MXPA-25439	Chinese characters were found to be translated incorrectly while translating the contents of a Delete confirmation message box.
MXPA-25497	The information regarding calculation of array size in DSQL Online tasks in xpa help documentation was not in accordance with the behavior.
MXPA-25512	If Paste operation was performed inside an edit control, it trimmed the space character next to it.
MXPA-25568	It was found that the Logging() function did not work in Runtime mode.
MXPA-25630	When a .Net Component was defined in CRR, and if Magic xpa Studio was restarted, then due to an attempt to load the same .Net assembly that was already loaded, the following error occurred: 'Error loading component: System.Windows.Forms'.
MXPA-25652	When using 'Rich Client Deployment' Interface Builder, if the Application Name was changed in 'Published Application Alias', then the same was not getting reflected in the deployment links.
MXPA-25743	On navigating a non-frozen column, the label on the hidden column's header was partially getting displayed on the next adjacent column's header, making the latter's label appear distorted.
MXPA-25768	In a uniPaaS 1.9 application, when the GUI display Style property set to '2-D' was broken and changed to 'Windows 3-D' in the control property, an Edit control was displayed with a Border but on migrating the application to Magic xpa 4.6 or above, the Edit control's Border property was found to be changed to 'False', thereby turning the border invisible.
MXPA-25788	In a particular scenario, Magic xpa Studio was found to crash when a parent program had a Subtask, both of them had their respective Data Sources, and when APG was performed on the Data View of the parent program.
MXPA-25916	When the Form Size exceeded beyond the screen limits, the vertical Scroll Bar was displayed on the Form in uniPaaS but it didn't display in Magic xpa. On aligning the fix with .Net behavior, now if the Form's Height and Width; both go beyond the screen limits, then both those parameters are restricted to the screen limits and both the scrollbars appear.
MXPA-25940	On pressing either pgup or pgdn key, an incorrect value was getting selected in the Combo Box.

#	Description
MXPA-25947	While executing a task having MSSQL Table and Initial Mode as Query, an error, 'Failed to open... Invalid input parameter values' occurred while searching the records using Incremental Locate, and the task terminated.
MXPA-25961	When Magic xpa Runtime was started with the command 'Mgxp Runtime.exe /ini=ini.heb /user' and Hebrew System locale was used, the following error occurred. 'Unable to connect to the app. Please make sure the username and password are correct'.
MXPA-25969	It was possible to breach the MgUsrDmp.exe utility using an external utility thereby gaining access to the security file by eluding the Supervisor password.
MXPA-25971	When the characters in an Edit control were selected by Shift+Right/Left keys, and when the Shift key was released and some characters were typed, the characters appeared as though they were typed along with the 'Shift' key. This erroneous behavior was observed when SpecialKeyboardBuffering was set to 'E'.
MXPA-25988	Though Magic xpa discontinued supporting DDE functions for 64-bit Runtime since version 4.5, it was found that on using the functions in later version(s) it did not generate error log in mgerror.log file.
MXPA-25994	The licenses were being shown 'in use' while no users/contexts were being active. Manual restart of the GS was required to release the licenses.
MXPA-26016	The function MailFileSave() when used with file-index parameter=0, was found to save one attachment less than the total number of attachments required to be saved.
MXPA-26031	In uniPaaS 1.8 when a program was executed with Verify Error operation, the program name appeared in mgerror.log but when the same program was migrated to execute on uniPaaS 1.9 and Magic xpa 4.7.2, the program name did not appear.
MXPA-26034	Memory leak occurred with the error, 'ERR THREAD ABORTED (-139)' on executing a program with Rich Text controls, which were not disposed while terminating the tasks. This erroneous behavior was observed when the End task condition was set to maximum value and the number of User Objects that Mgxp Runtime.exe processed had reached 10K.
MXPA-26036	In a specific scenario of expanding the Block-If operation present inside the RM Compatible handler, Magic xpa Studio crashed.

#	Description
MXPA-26061	In a particular scenario, when a Form was opened and the Properties window was moved around, Magic xpa Studio was found to crash.
MXPA-26066	If a Block Else statement was disabled in RIA, then on executing the program the following error was issued: 'Index was out of range. Must be non-negative and less than the size of the collection. Parameter name: index'.
MXPA-26069	In an Online task with two Subforms, if the first Subform's Automatic Refresh property was set to 'True' then due to enforcement of the Subform Refresh event, the task went into recursion infinitely.
MXPA-26070	In RIA and Online applications, while executing incremental search on a DSQL query with ORDER BY clause, performing View Refresh, and again executing incremental search, ran into Runtime engine crash.
MXPA-26081	During Runtime while raising a 'Create Line' event, a 'Verify...' error message placed in Record Suffix unit was getting displayed continuously when the error message was actually tried to display on a particular condition.
MXPA-26109	In a Parent-Child resident tasks scenario where the Child task had multiple Link Joins and Evaluate Link conditions, and the Parent task had all the Tables used by the Child task open, Magic xpa Runtime engine crashed.
MXPA-26122	In cases of dll error's returned from User Procedures, the .dll name, and its method name were not displayed on the Status bar as well as in the mgerror.log file.
MXPA-26170	In a particular scenario, Magic xpa Studio crashed when Switches (which are optional) were not used in AutoProcessSequence file for Check Operation, and when AutomaticProcessingLogFile was not provided.
MXPA-26171	Active contexts were found to close automatically when MicrosoftSQLServer was restarted due to the network hiccups.
MXPA-26179	The Check operation of the Automatic Processing tool did not generate Recommendations related to the execution side of RIA programs into the given Checker output .JSON file.
MXPA-26208	When Subform Refresh event and CtrlGoto() function were defined in a handler in that order, then CtrlGoto() did not work due to CtrlGoTo() function getting executed before Subform Refresh event during runtime resulting in finding no parkable control to park on.

#	Description
MXPA-26230	In a particular scenario of Online tasks, adding Block Else statements in the Task Prefix logic unit, collapsing the statements, and then disabling the statements resulted in Magic xpa Studio crash.
MXPA-26287	In a particular scenario, when Subform Refresh event was raised and when the related Direct SQL task failed to execute, RIA server crashed.
MXPA-26329	When a Radio control's Appearance property was set to 'Button' and the System Locale was Hebrew, then the Radio control did not appear according to the value set in the 'Choice Columns' property. The same behavior occurred on English System Locale when 'Right to Left' property was set to 'Yes'.
MXPA-26353	On zooming into the Arguments of Call Program operation (Call by Reference), the Variables List displayed also those variables which were out of scope of the current handler. It was even possible to pass those beyond-scope variables.
MXPA-26462	In a particular RIA scenario, the Magic xpa 64-bit runtime engine was found to crash, resulting in an error -197 on the client-side.
MXPA-26465	In a particular scenario, when the option 'Close tasks when activating a program from the menu' was enabled in Main Program and a RIA program was called using Call by Name operation followed by another RIA program call, then on terminating the second RIA program, the Runtime was found to crash.
MXPA-26480	While executing a Web Client task with Memory table, when the Transaction Mode was 'Within Active Transaction', then the following error appeared: 'Cannot read properties of undefined (reading 'getControlMetadata') at TaskMagicService.handleSetProperty', due to which the Subform displayed only one record despite availability of multiple records.
MXPA-26490	When the special flag SpecialIgnoreBGinModify was set to 'Y' and the Task was executed in Modify mode, then the non-white BG color of an Edit control was not getting ignored.
MXPA-26539	In a specific scenario, Magic xpa Runtime execution was found to delay for a while unduly.
MXPA-26549	In the online sample DT07_DifDateTime(), the function is as 'DifDateTime (Date2, Time2, Date1, Time1, DaysVariable, SecondsVariable)'.
MXPA-26567	While closing multiple Web Client tasks in a single request, if there was a Call to a Batch task in the Task Suffix (TS) logic unit, then the called Route task was getting called multiple times, which resulted in the erroneous execution of Task Prefix (TP) multiple times.



#	Description
MXPA-26587	In a particular scenario, when the option 'Close tasks when activating a program from the menu' was enabled and a RIA program was called using Call by Name operation followed by another RIA program call, then on terminating the second RIA program, the Runtime was found to crash.
MXPA-26658	If a file was tried to access using FileExist() function immediately after it was created, then the function returned 'FALSE' indicating that the file was not created. It happened due to a small time (milliseconds) it took to reflect the new file in the file system.
MXPA-26685	Database Tables were not accessible in PostgreSQL version 13. A keyword named PostgreSQLDefaultOid is introduced to fix the issue of compatibility.
MXPA-26712	The function ServerFileToClient() copied the file successfully on Client but the returned location of the file on Client-side was found to have an extra '\', due to which Windows Explorer issued the following error: 'Windows can't find "C:\...\...\\". Check the spelling and try again.'
MXPA-26917	If the text was entered into the table at Runtime with the special flag SpecialTableReduceTitleHeight set to 'Y' then the text displayed bottom-aligned to the table cell instead of center-aligned.
MXPA-27007	When the Online programs from Components were called recursively using Call By Name, then Magic xpa issued an error: 'Component used by the task does not exist or could not be opened'. Also, if the component programs were called using the Main Program local handler, then calling and closing those programs resulted in crash.
MXPA-27022	Magic xpa Studio went into non-responding state when the project was under MS Visual SourceSafe version control and when the Get Definition utility was performed on Oracle DB.
MXPA-27037	On Android devices, when a file was tried to access from Internal Cache using 'file://<path>' from a Browser control, it was not accessible and the following error was issued: 'Web page not available'.
MXPA-27045	In Browser Client, a Combo box did not show values from the attached Data Source column.
MXPA-27065	With PostgreSQL DB, it was not possible to delete or modify the records of a Table if the Table had a unique index of type Unicode. In this case, Magic xpa raised the error: 'Record has been changed by another user or process...'.

#	Description
MXPA-27069	In a specific scenario, Magic xpa Runtime crashed on the occurrence of Runtime Exception. The crash was observed when a Direct SQL task was executed in a Subform and the MSSQL server was unavailable temporarily.
MXPA-27073	The contents of .rtf Blob file were not getting printed when Input/Output was generated using Print Preview.
MXPA-27079	In a Batch task, a Rich Edit control with the GUI Output Form's Expand Form property set to 'One page' printed only the first line of the data into the control.
MXPA-27192	In a Web Client task, slow page loading with 'Page Unresponsive' message was observed due to large amount of data being attached to the controls when multiple users were trying to upload their files of around 15 to 17MB size.
MXPA-27201	When an Edit control was in Autocomplete Mode, and when the control was navigated into/out of, then the long strings were not displayed correctly.
MXPA-27302	In a specific scenario, Magic xpa Runtime crashed when a user function was employed in Task Properties and the data was attempted to filter at Runtime. The crash occurred with the following errors: 'ERR-THREAD-ABORTED (-139)' and 'This session was closed by the server(-197)'.

Magic xpa 4.7.2

We are pleased to present Magic xpa 4.7.2 update.

CI/CD Enhancements

The following features are provided with respect to Magic xpa CI/CD.

New Tools Infrastructure Command: 'Check'

Magic xpa provides a new command named **Check**, which you can execute to record the number of Errors, Warnings, and Recommendations into a desired output file. Check operation can be carried out on entire application or on various repositories while Magic xpa Studio is executing in the background (auto-processing).

You can load the Checker Results file which is generated in JSON format through **Check** operation in Magic xpa Studio.

The Check option can be executed in background enabling a full application check to be integrated into a Continuous Integration (CI) pipeline.

New Menu Option: Load Background Checker Results

Magic xpa provides a new menu option named **Load Background Checker Results**, which upon clicking invokes the Open file dialog box to be able to select the Checker Results file and load it. This Checker Results file is generated through the **Check** operation mentioned above.

Support to Deploy Applications in Background

As a continuous deployment offering, Magic xpa enables you to deploy applications on multiple machines. Magic xpa provides the following three files:

- **IIS_web_client.bat** and **IIS_rich_client.bat** files: When executed on all machines with Magic xpa copied versions, it creates the required settings to execute the deployed applications.
- **BrokerSettings.exe**: Creates Broker service.

Web Client Enhancements

The following features are provided with respect to Web Client.

Subform Modality

Magic xpa enables you to set a Subform to behave as Modal.

New Property: Modal

A new property named **Modal** is introduced for Subform control, which upon setting to 'Yes' makes the Subform window behave as Modal.

Note: The Call operation must specify name of the Destination Subform, which should be entered as any free text string like Destination Frame.

Numeric Directives using Third-party Numeric Mask Package

Magic xpa now enables you to use Numeric directives using a third-party Numeric Mask Package. The **ngx-Currency** package is used to support the currency-related directives.

A new Angular function **mg.getNumericPicture()** is introduced in Magic xpa, which enables you to get the object that provides various currency directive keys.

Please visit the relevant help topic at Home > Mastering Magic xpa > Web Client Application Development > How Do I Use Numeric Currency Format Using a Third Party Package?

Web Client Preparation Utility

Magic xpa now provides **Web Client Preparation Utility** to create Web Client Models and Styles from the existing GUI or Rich Client Display Models and Styles, and Field Class and columns.

A log is created after converting OL/RC Models to Web Client Models.

Logging is supported for:

- The unsupported controls in Web Client task such as Line, Rich Edit, Tree, .Net, and Browser.
- The unsupported values of the properties for any control that are set to default in Web Client task.

You can access the utility from Magic xpa Studio menu *Options > Web Client Preparation*.

Note: Display Models for the unsupported controls are not created.

Provision to Know Changed Number of Records

Magic xpa provides an event named **RecordsCountChanged**, which is raised when the number of records in a Table changed at Server is received at Client. You can [override it in the generated component](#) to trap the changed value of number of records. This event is useful to [customize pagination](#).

Angular 10 Support

Magic xpa Web Client was tested and is compatible to work with Angular 10.

Customizing Error Messages

You can now replace Angular's default error message issued for invalidated control with a customized error message. Magic xpa introduces an Angular function named **mg.getPicture()** that

returns picture of a control in Magic xpa tasks. You can use the function along with mgError tag for error message customization.

Support of Function LastClicked()

The function **LastClicked()** is now supported.

Spinner for Busy Client

Whenever the Client is busy irrespective of the kind of operation it does, Magic xpa displays Spinner (busy indicator) after 1 second from the time the Client started to be busy.

Provision to use Advanced UI Components

To enable you to use advanced UI components, Magic xpa introduces an Angular function named **mg.GetFormRecords()** that returns the set of records present at Client-side at a particular moment. You can use this function to be able to use components like Pivot Grid, Charts, and alike with Client-side operations like filtering, sorting etc.

Closure of Multiple Tasks in Single Request

If a task does not have any Client-side operation or record-level transaction pending in its Task Suffix or the Task Suffix of any of its Subform tasks while closing a task, then Magic xpa closes such tasks along with their Subform tasks in a single request to Server. It improved application performance significantly.

Support of Special Flag SpecialCancelOnCreate

If this flag is set to 'Yes', if the task had **Allow Empty Dataview** property set to 'Yes', and if the new record being created is the only record in the Dataview, then the task will go back to Empty Dataview mode.

This is the additional behavior to the existing behavior of the flag in Online tasks, in which setting this flag to 'Yes' dumps the new record and the cursor returns to the first field of the previous record in Modify mode.

Runtime Enhancements

The following enhancements are added with respect to Magic xpa Runtime.

New Flag: SpecialEmptyDVSubformInit

This special flag determines initialization of default values for the controls, which are placed outside a Table control when the task runs within a Subform.

Valid values: Y, N

Default value: Y

New Flag: SpecialExternalAESEncryption

The special flag named **SpecialExternalAESEncryption** is introduced, which on setting to 'Y' aligns Magic xpa's AES encryption/decryption with the encryption/decryption of the third-party tool.

Valid values: Y, N

Default value: N

Database Enhancements

The following enhancement is added with respect to Database.

No Logging of 'SELECT VERSION...' Statement

No matter what the value of the keyword **LimitLinkToSingleFetch** is, the statement 'SELECT VERSION FROM V\$INSTANCE' will not be logged in to Oracle Database log file.

New Keyword to Control Support of InMemory Tables in MSSQL Server Database: SQL_NO_INMEMORYTABLES

By default, for every open table the gateway queries MSSQL Server if the table is InMemory or not. A keyword named **SQL_NO_INMEMORYTABLES** is introduced, which upon setting to 'Y' in Database Properties, the gateway does not support InMemory tables. If this keyword is set to 'N', the default behavior is retained.

Mobile Enhancements

The following enhancements are added with respect to Mobile.

iOS: Provision to Control Downloading of Cache Files

Magic xpa enables you to control downloading of cache files by introducing a new keyword named **DownloadTimestampBuffer** to the execution properties, measured in seconds.

If the keyword does not exist, or equals to 0, the file will be downloaded, unless the timestamps match completely (in which case the file will not be downloaded). If the keyword equals to a number (which determines the buffer size in seconds), then the file will be downloaded only if the timestamp difference is larger than the buffer size.

Android

Protection from Tapjacking

Magic xpa mobile applications are now protected from tapjacking.

New Keyword to Control JavaScript Execution: `webviewJavascriptEnabled`

Magic xpa introduces a new keyword named **`webviewJavascriptEnabled`**, which allows you to control JavaScript execution from Browser control. By default, this keyword lets the Browser control execute JavaScript. Setting this keyword to 'False' in `setting.properties` file disables the JavaScript execution.

Valid values: True, False

Default value: True

Git Connectivity and Support Enhancements

While creating a repository from within a Magic xpa project, the **`.gitignore`** file will now contain the following entries:

```
/Source/ProgramHeaders.xml
/Source/DataSourcesIndex.xml
*.log
*.lock
*.opt
*.sln
*.suo
*.xpaproj
*.xrf
```

A Note Regarding MSSQL Server Gateway Support for TLS 1.2

Microsoft® SQL Server Gateway is now compatible with the latest Microsoft® OLE DB Driver 18 for SQL Server® in order to support TLS 1.2. For the MSSQL gateway to work, please download the SQL OLEDB driver. It is available at: <https://docs.microsoft.com/en-us/sql/connect/oledb/download-oledb-driver-for-sql-server?view=sql-server-ver15>. This is required starting from Magic xpa 3.3b in which case you need to install the new OLEDB Driver for SQL Server. Please refer the Compatibility Guide for the information on the supported databases.

Fixed Issues

#	Description
MXPA-20704	While executing a RIA with MSSQL DB, if Blob had large data, -139 Error sporadically occurred.

#	Description
MXPA-21535	When Find Reference was performed on a user-defined function from the Logic editor, the result pane was found to display also other functions starting with the same name along with the searched function.
MXPA-24462	If Magic's Cypher() function was used in AES encryption and if a third-party tool such as Windows PowerShell was used for decryption, then the decryption did not work.
MXPA-24558	While debugging a Rich Client task, it was found that the Variable window's contents disappeared when two consecutive Call By Name operations were called; one with a cabinet file and the other without it.
MXPA-24563	When a Combo Box containing a large number of items was expanded, in uniPaaS 1.9 it was displayed correctly whereas in uniPaaS 2.0 and all later Magic xpa versions, it was getting displayed beyond the height of the entire screen.
MXPA-24586	In a particular scenario, when the Grid Service Agent (GSA) service 'Magic xpa 4.7 GSA' was started on Windows 2019 Server, the CPU load was found to go up to at least 80% on the Server.
MXPA-24627	A particular iOS application crashed sporadically.
MXPA-24751	Magic xpa's locking mechanism was incompatible with the previous version. The mechanism is upgraded now. In some specific cases, the functions Lock() and Unlock() are not compatible with other previous versions running in parallel to this version.
MXPA-24834	While installing Magic xpa if the component 'Browser based deployment' was unselected, then the file 'MGBCL047_00ENG.xml' was found to be missing from /Scripts folder, which caused error while executing Web Client programs.
MXPA-24842	In an Online application, the nested Subtasks were found to be executing infinitely when their Allow Empty Dataview property was set to 'Yes'.
MXPA-24853	Find Reference did not search the user-defined function when the function definition was modified.
MXPA-24891	There was an incorrect mention in Magic xpa help about applying a font to Tooltip from the Fonts Repository.
MXPA-24919	For all the controls in the Models Repository, for properties such as Height/Width, it was not possible to set their values in decimals. The entered values were getting converted into the default (Dialog Units) unit thereby losing their precision.

#	Description
MXPA-25062	In a specific scenario, launching a heavy application containing multiple large components and thousands of programs leads to crash with 'error serializing task' error.
MXPA-25082	In an online application, when an Edit control's Zoom Button was assigned an image, the button erroneously showed ellipsis (three dots) along with the image.
MXPA-25094	If Control Hit handler was defined with its Propagate property set to 'No' and if clicked on the next parkable control with mouse-click, then it was found that in Online tasks, cursor was not displayed on the clicked control whereas in RIA task, it was displayed.
MXPA-25095	RIA Cache files were not getting generated in \\RIACache folder if license MGRIA_MOBILE_ONLY with setting Mobile=Y was used.
MXPA-25105	In a customer's application, it was found that a Batch task with its Window Type set to 'Modal' was almost 10 times slower in exiting than with its Window Type set to 'Default'.
MXPA-25153	In case of a RIA Desktop Client, the Menu on the Form window was found to be missing when the Form window was closed and opened again. This erroneous behavior was observed for a specific user profile only when the Username was longer than 8 characters or contained a space.
MXPA-25156	When the User Event set with Force Exit=Editing was invoked on F6 key, the Edit control did not show the updated value.
MXPA-25272	For Invoke UDP operation, 64-bit engine-specific information about the required parameters was not mentioned in Magic xpa Help.
MXPA-25284	While executing a Web Client application that called a Batch task containing some delay, it was found that the default Spinner was not getting displayed.
MXPA-25285	While executing a Web Client application, if the third-party package ngMatero was used, then Overlay window was being invisible due to getting displayed behind the ngMatero container.
MXPA-25286	In Online and RIA tasks, the function MnuReset() was found not resetting the Pulldown Menu to the default when the function was evaluated in a program from a Magic xpa Component.
MXPA-25289	An incorrect Windows Server version was mentioned in the Compatibility Guide.
MXPA-25317	The event Create Line Above was found to be not working when Allow Empty Dataview property was set to 'Yes' and when the Table had no records.

#	Description
MXPA-25320	While generating a Web Client application, if the name of the project and the name of the workspace were same, then the project was generated incorrectly.
MXPA-25328	The Messaging Component was found to crash while sending messages.
MXPA-25344	On iOS devices, the function ServerFileToClient() did not copy file to Client when the file already existed on Client and was less than one minute older.
MXPA-25348	When an Edit control had an expression that passed a blank filename, it threw an exception causing other Buttons on the Form not to get displayed at runtime.
MXPA-25354	While debugging the application if a Blob variable containing large data was hovered, its Tooltip flickered.
MXPA-25359	When Space character was used as a Thousand-separator, RIA tasks displayed the expected result whereas Web Client tasks did not display result with the desired separator.
MXPA-25362	In an Online task having Link Outer Join, when Index List was activated at Runtime, the Segments were getting populated in the Index List incorrectly.
MXPA-25379	Memory leak occurred on Japan Windows while executing an Online task and traversing through a large number of records present in the Table.
MXPA-25392	On generating Print Preview of a Report, it was observed that the data in the last row of a page was displayed overlapping the data in the first row of the next page.
MXPA-25412	In the scenario where two Component programs were loaded in a Host application and also in to one another, and when the Host application called the first Component program via Menu by passing a variable, it was found that the second Component program's variable was getting passed erroneously.
MXPA-25414	When a component program triggers a Variable Change handler, and this handler, in turn, attempts to call another internal program from this same component, then this internal program was not getting materialized.
MXPA-25418	In Web Client task having DB SQL Where clause, Record View was not updated on raising View Refresh event, if the optional parameters were not passed to it and the parking was not on the Table control.
MXPA-25448	While executing Web Client tasks, it was found that Spinner did not display when Bootstrap CSS and other files such as images and media were added to the \\asset folder.

#	Description
MXPA-25453	In a specific scenario, when an Online task displaying a single record in a Table control and the next record only partially visible, then if Next Row event was invoked Magic xpa Runtime crashed.
MXPA-25506	In Online task when SpecialKeyboardBuffering flag was set to 'E', then while selecting characters in an Edit control it was found that pressing Shift+Right-arrow keys randomly canceled the current selection and restarted it from the middle of the string.
MXPA-25516	In a Web Client task, when creating a record returned an error, then raising either Create Line or Create Line Above event caused to execute Control Verification logic unit infinitely.
MXPA-25588	When a Web Client task was executed and when the browser was refreshed, it was observed that the Routed program was receiving an incorrect value of a parameter if the parameter value was greater than 16 characters.
MXPA-25589	In a Web Client task, if a new record was created on an Empty Dataview screen and if View Refresh was performed, the existing records in the table did not seem to appear on the screen. This happened when View Refresh was performed without the optional parameters.
MXPA-25636	An error, 'The license loaded by the xpa Server cannot be used in Floating mode (-189)' was displayed while trying to use MGWEB license in Floating mode.
MXPA-25647	Virtual variables were not getting initialized to their default values for a Push button in Subforms when the task was started in Create mode and End task condition was set to 'Yes' before Record Prefix.
MXPA-25649	The Tooltips for a Tree control were being displayed over the nodes making it impossible to click on the nodes to select them.
MXPA-25664	When RC and Online tasks had two Data Sources assigned to two Combo Boxes respectively, then the second Combo Box displayed the value of the first Combo Box. This erroneous behavior was observed if the Display Field property of both the combo boxes had same field names but belonging to different Data Sources. The same scenario existed for the Linked field property as well.
MXPA-25773	Subform was found to display incorrect range of records when the task Data View had Locate operation for a Table Column and virtual variable was defined with Server-side operation in its Init.
MXPA-25802	In a Web Client task when the function SetParam() was used to set a numeric global parameter, it was found that the parameter set in the previous session was not available in the next session.



#	Description
MXPA-25803	On iOS devices, when a specific URL 'http://bagrut-calculator.huji.ac.il/calculator/#/calc-type/' was tried to open in a Magic xpa Browser Control program, then the error, 'Server Error 404 - File or directory not found' was issued. The error was observed to occur due to the presence of a '#' character in the URL.
MXPA-25841	If the DataSourceIndex.xml in the Source folder was renamed or deleted, then the new DataSourceIndex.xml, after opening the application was getting created without Table Relationship entries. This behavior was also observed on Version Control.
MXPA-25880	It was observed that if the keyword LimitLinkToSingleFetch=N was mentioned at second or third position in the list of all the keywords mentioned in the SQL Tab of Database Properties, then the statement 'SELECT VERSION FROM V\$INSTANCE' was erroneously being logged in to the developer-level log of Oracle database.
MXPA-25939	While working on an application on Git version control, when the branch was switched from Master to some other, Automatic Program Generation (APG)/Execute was not possible on Data sources.

Magic xpa 4.7.1

We are delighted to present Magic xpa 4.7.1 with new features and enhancements.

Studio Enhancements

The following enhancements are added with respect to Magic xpa Studio.

GigaSpaces with Magic xpa 32-bit Server Discontinued

Provision of GigaSpaces with Magic xpa 32-bit Server was discontinued since Magic xpa 4.7 due to unavailability of 32-bit executables in GigaSpaces version 15.

Note: GigaSpaces option was removed from both the Magic xpa Studio and the 32bit Server installation.

Runtime Enhancements

The following enhancements are added with respect to Magic xpa Runtime.

New Property: Use Default Width

A property named **Use Default Width** is introduced for Edit control's Zoom Button, which upon setting to 'True' sets the width of the Image to be identical to the width of the Zoom Push Button.

New Value for SpecialKeyboardBuffering: X

The special flag **SpecialKeyboardBuffering** is now provided with the new value 'X'. Upon setting the flag to 'X', it behaves identical to Extended buffering (E), but disregards Ctrl and Shift keys while keyboard buffering.

New Flag: SpecialComboShowBorder

The special flag **SpecialComboShowBorder** decides whether or not the 2-D or Windows style Combo Box will have a border when it is not in focus.

On setting to N, the Combo Box appears without border (as per previous behavior) and on setting to Y, the Combo Box appears with border.

Valid values: Y, N

Default value: N

New Flag: SpecialShowLastOrphanInFrame

A special flag named **SpecialShowLastOrphanInFrame** is introduced, which always stores the last Orphan in Frame and displays it after closing the current task window in Frame if it is evaluated to be a non-Orphan window.

When set to Y, Magic xpa displays the previous Orphan task in Frame in the following scenarios:

- After an Online task with Close Task Window property set to Y is terminated.
- After a Batch task with Close Task Window property set to Y calls an Online task with Close Task Window property set to N is terminated.

Valid values: Y, N

Default value: N

Note:

- The behavior on setting the flag to Y is not applicable to Subform.
- If the flag is set to Y and if the Main Program has Destination Frame set, then the Main Program is used as a Destination Subform for Online tasks.

New Flag: SpecialDotNetAllowZeroDate

This special flag when set 'Y', retains the older behavior of allowing .Net DateTime object to be initialized with 0.

Valid values: Y, N

Default value: N

Git Connectivity and Support Enhancements

The following Git-related enhancements are added to Magic xpa.

Optimized Git Connectivity

If you want to register yourself with Git and when you start the process of registration, Magic xpa issues a dialog informing that the registration process might take a while to complete. Also, if you have already registered yourself with Git, Magic xpa opens your project promptly.

Branch ID Optimization

The file `branchIDs_x.txt` will not be tracked by Git now. The file `.gitignore` residing at repository level will now contain the entry `MagicIDs/branchIDs*.*`.

Web Client Enhancements

The following Web Client enhancements are added to Magic xpa.

Third-party Time Picker

Magic xpa now enables you to add an OS-independent third-party Time Picker (for instance: `ngx-material-timepicker`) to support 12-hours and 24-hours' time format in Web Client Applications. Please visit the relevant help topic at *Home > Mastering Magic xpa > Web Client Application Development > How Do I Use a Third-party Time Picker?*.

Note: The third party Time Picker `ngx-material-timepicker` does not support seconds.

Smooth Navigation of Records in Table

The server can proactively load records in to the client's table when the client is idle to give you a smooth records navigation experience. Magic xpa introduces a property named **Server Read Ahead** which upon setting to 'Yes', the client informs the server to fetch all records from the database chunk-by-chunk and send them back to the client.

Note: The property is available for Table controls that have Web Style of Material Design Grid.

Support for ISAM Database as Data Source

Magic xpa update supports ISAM Database as a linked Data Source only in Linked Query operations, for paginated tables.

Mobile Enhancements

The following Mobile-related enhancements are added to Magic xpa.

iOS:

Support for Dark Mode: iOS Client now supports dark mode of iOS 13.

Support for iOS 14: Rich Internet Applications running on iOS can now be executed on iOS 14.

New Flag: SpecialShowKeyboardOnReadOnlyEdit

A special flag named **SpecialShowKeyboardOnReadOnlyEdit** is introduced to determine whether or not to invoke the soft keyboard after parking on a read-only Edit control.

When the flag is set to Y, the keyboard is invoked and you can copy the Edit control's contents.

When the flag is set to N, the keyboard is not invoked and no copy mechanism is allowed.

Valid values: Y, N

Default value: Y

Note: This behavior is valid for iOS only.

Known Issues: User Interface

We have upgraded our binaries to be compiled using .Net framework 4.7.2, which brought the following side effects:

1. The System event Ctrl+A is not raised for the Edit controls, which have their Multiline Edit property is set to 'True'. It is considered by .Net as though you selected all lines in the Edit control.
2. When the Form's Window Type property is set to 'Fit to MDI', then height of the Title Bar increases by 10 pixels.

Fixed Issues

#	Description
MXPA-750	When a project was added into TFS version control and when the Checkout button on Web Application Settings dialog was clicked, then the error, 'Critical error of Source Control Provider, Please restart IDE.' occurred if the Application Properties were not checked out.
MXPA-19918	The BG color of the image was getting displayed when the Display Settings > Scale and layout setting was increased from 100% to 125%.
MXPA-20762	If a Tree control was placed on a Subform and if the program execution control was parked on the parent form, then while trying to expand a node of the Tree control it didn't expand and the first node of the Tree was shown highlighted.
MXPA-21011	When the title of the Class-1 Form was scrolled down with Vertical Scroll Bar to move it to be just behind the Horizontal Scroll Bar, then the Horizontal scroll bar stopped functioning.

#	Description
MXPA-21105	The Logon dialog box displayed Question Marks (؟؟؟؟) in the place of application name in Hebrew if the application was invoked as StartApplication using Runtime.
MXPA-21248	When Help File parameter was set to blank in Magic.ini and Help was invoked by pressing F1 while executing an Online program, the error, '\[Error] - \[MgGui.dll] Help URL ' is not valid.' was getting logged in mgerror.log file.
MXPA-21332	On migrating an application from uniPaaS to Magic xpa, it was found that the Class 0 Form's Window Type property that was set to 'ApplicationModal' in uniPaaS did not get converted to 'Modal' in Magic xpa.
MXPA-21370	A customer's specific mobile app took 3 minutes to open on iPhone 11 device when the images were packed with IPA (Assets Folder). Also, on a specific iPhone8 Plus device, the same app took 3 minutes to open.
MXPA-21532	If there was a preceding space character before the 'task var names' parameter of DataViewToText() function, Magic xpa issued an error, 'DataViewToText - Illegal task variables specified :'.
MXPA-21740	In a program when 'Title Bar' property of the GUI Display form was set to 'False', the Minimize and Maximize buttons were getting displayed momentarily before terminating the program execution.
MXPA-22230	On Hebrew machine, when an Online application was executed on xpa 3.3x and when a .rtf file was tried to open in a Rich Edit Control, it was found that the Table columns were displayed in reversed order with the data inside them aligned to left instead of right as against uniPaaS 2.0.
MXPA-22454	While executing RIA Offline application for the second time, if User Functionality component was present in the application and when 'ConnectOnStartup' was set to 'No', then the error, 'Metadata files are not synchronized. (-271)' was issued.
MXPA-22669	When a GUI Output form was printed as a PDF, it was found that the BMP images higher than 16-bit did not appear on the printed document.
MXPA-22744	While adding records in an empty Table, the Table's DataGridView was not getting refreshed immediately and showed only one record, which was entered last.
MXPA-22791	When HTTPCall() function was invoked with option GET, the header part 'Content-Type: application/json; charset=utf-8' was getting removed from the message header.

#	Description
MXPA-22806	If an Edit control's Show Zoom Button property was set to 'Yes' and Button Style was set to 'Image button', the zoom button's width was getting altered.
MXPA-22835	When a Push button event was raised using an 'Enter' key, the function LastClicked() returned blank instead of returning the Push button's control name.
MXPA-24086	If Control Hit handler was used with Propagate property set to 'No' and values were tried to select using Space Bar, then they were not getting selected.
MXPA-24133	When an Online application containing a Subform with Placement property was set to execute in Full Screen mode, and when an Edit control was in an out of the focus repeatedly, then the Subform was found to increase its size and the Check Box on the Subform changed its position.
MXPA-24163	Magic xpa runtime crashed while debugging a specific customer application using GFlags.
MXPA-24165	In Web Client tasks, if an Edit control had a data expression attached to it and when the control was clicked on during runtime, an error occurred: 'Control either has an expression or has parent task variable attached to it. Failed to park on control with name: <control name>'. The bug is fixed and the error is now logged into the console for more clarity.
MXPA-24219	If the picture format of an Alpha type variable was set as '1 A' (where 1 is size and A is auto-skip), then the application did not allow to enter a character in an Edit control.
MXPA-24244	When a comment was entered for any item from the repositories, the color of the serial number of that item changed to default color (blue), but it did not change to the original color (black) when the same comment was deleted.
MXPA-24246	The focus was shifting to incorrect Radio control after pressing the Tab key when both the Radio controls were attached to the same Data variable.
MXPA-24247	When HttpFramework was set to 'J', and the header 'Content-Type: application/json; charset=utf-8' was tried to send through HTTPGet() function, then the header was not getting displayed in the header list.
MXPA-24294	On iOS devices, the soft keyboard was getting opened when the Edit control's Modifiable property was set to 'False'. Please see SpecialShowKeyboardOnReadonlyEdit in this Release Notes document.
MXPA-24295	In a particular customer's application scenario, memory leak was observed on the RIA server.

#	Description
MXPA-24297	The User Functions defined in the Main Program of a Web Client project were not getting executed.
MXPA-24298	When an expression number is set to the Data property of an Edit control by typing the expression number and then zooming into the Expression editor, if another expression is selected, then the previously typed expression number stays on the property instead of the newly selected one.
MXPA-24303	When Invoke OS Command operation was executed for launching apps on Android client, the string between the two percentage symbols (%string%) was found to be getting disappeared.
MXPA-24308	The menu options 'Open in Visual Studio Code', 'Generate Form Component', and 'Generate Controls Accessors' were found disabled in the Form Editor of Web Client program if the project was under version control and program was not checked-out.
MXPA-24341	When MailFramework was set to 'J', while reading some specific mails, it was found that MailMsg functions had returned blank body. In case of some other specific mails, when MailFramework was set to either 'L' or 'J', the functions returned blank header.
MXPA-24464	The time taken to insert records into DB2400 Table via EASYCOM gateway was found to be considerably more than to insert the same number of records via ODBC gateway and IBM Client Access driver when the transaction was executed before Task Prefix.
MXPA-24471	On a German machine, when an application was created and the Form Designer was opened, a Visual Studio error occurred, '"XamlDesignerPackage" package was not loaded properly'.
MXPA-24504	When a 2-D or Windows style Combo Box was placed inside a Table control and when the Combo Box was not in focus, it still appeared with a border. Please see SpecialComboShowBorder in Release Notes.
MXPA-24506	When SpecialKeyboardBuffering flag was set to 'E' and when a Batch task called from an Online task was being executed, the behavior of pressing Ctrl/Shift+Click key(s) was still effective after changing the focus to the parent task. Please see New Value for SpecialKeyboardBuffering in this Release Notes document.
MXPA-24516	On iOS devices, a Combo Box was found to expand on opening and closing it few times.

#	Description
MXPA-24565	On iOS devices, when switching to Dark Mode, the text on the Title Bar was not clearly visible.
MXPA-24571	When an application with a Batch task containing a DSQL having Link Query operation on Memory table was executed on both Magic xpa 3.2d and Magic xpa 4.7; it was found that the performance of the latter had reduced in terms of speed.
MXPA-24588	In a particular scenario, a RIA task had a Table control with its Scroll Bar Thumb property set to 'Absolute' and a few thousand records in it. When the task was executed, the xpa Runtime engine was found to crash.
MXPA-24596	The information regarding return value of FileListGet() function in xpa help documentation was not in accordance with the function's actual return value.
MXPA-24651	When an application was executed in Screen mode, a Phantom Subtask was expected to display the same data that was entered in its parent task in an Edit Control, but the Phantom Subtask's Edit Control was found to be empty.
MXPA-24660	While working on the projects under Git, it was found that for each module added in the project, the batch file 'ProjectUnderGit.bat' was getting executed multiple times causing delays in opening projects under Git having multiple modules.
MXPA-24661	If two projects under a solution were tried to open in two different instances of Magic xpa, then error occurred in either of the two projects and .edp project files were getting deleted.
MXPA-24681	When the flag SpecialDisableGITFunctionality was set to 'Y', Magic xpa erroneously checked if the project was under Git or not.
MXPA-24952	In a particular scenario, MgxpRuntime crashed while reading the contents of Binary/ANSI vector using the function VecGet().
MXPA-25003	.Net Snippet Code was not getting executed if Date attribute was passed as an argument with the default value 00/00/0000. Please see SpecialDotNetAllowZeroDate in this Release Notes document.
MXPA-25023	Memory leak was observed on Linux and Windows machines while executing a Batch task and sending a few thousand requests to the Server.
MXPA-25073	In a Web Client application when the Internal Event 'ViewRefresh' was used without the first parameter then the error, 'TypeError: Cannot read property

#	Description
	'substr' of null' occurred in the Browser Console and the client stopped responding.

Magic xpa 4.7

We are excited to present Magic xpa 4.7 with new features and enhancements.

Studio Enhancements

The following Studio-related enhancements are added in Magic xpa.

Enhanced APG (Ctrl+R)

The existing APG utility is enhanced to create Browse programs quickly when Data Source has relationships defined for Table linking. The programs are created with the following:

- Multiple and multi-level Subforms (for 1:N relationships)
- Linked Tables (for 1:1 and N:1 multiple and multi-level relationships)

The programs are created based on the selected relationship(s) from the APG Relationship Tree.

For creating the Browse programs, you need to set a Relationship Criteria to link the Tables.

If you have linked two tables in 1:1 relationship, then with the enhanced APG, a program is created with a Link Query in it.

Confirmation while Deleting a Data Source before Overwrite

While overwriting a Data Source, Magic xpa issues a confirmation message for deleting the Data Source from the SQL-type and ISAM-type databases.

Enhanced Block Operations

Magic xpa supports expanding (+) and collapsing (-) the Block operations in Program Logic.

Note: In case of nested Block operations, expand/collapse state for the inner blocks is retained.

Debugging: Variable Values Available in Tooltips

Magic xpa provides runtime values of the variables in the tooltips while debugging programs.

Searching Program using Source File Name

Magic xpa enables you to find a desired program from the entire repository when you enter the program's source file name in **Find Text** dialog box. Magic xpa optimizes search by providing a

checkbox named **Search source file name only**, which on clicking searches the text only in the source file name of the program.

Customizing Colors of Columns in Link Operations

Magic xpa enables you to customize the foreground (FG) and background (BG) colors of Columns in Link operations.

Automatic Installation of Visual Studio 2015 Shell

Magic xpa automatically installs Visual Studio 2015 Shell. Please see [Known Issue](#).

Enhanced Git Connectivity and Support

Magic xpa brings up a number of enhancements to enable you to work with Git version control effortlessly. With the 4.7 update, Magic xpa deprecates the use of PushOk Git plugin and supports TortoiseGit plugin as a default for connecting to Git.

The following features are provided to enhance working with Git:

Automatic Identification of Project under Git

Magic xpa identifies whether a project is under a Git repository or not.

Note: Irrespective of whether a project is under Git or not, the three flags **VCActive**, **WorkOffline**, and **VCUseGitPlugin** are set to 'N' by default in the <project_name>.edp file.

Automatic Identification of Change of Working Branch from Outside Studio

If the working branch is changed from outside Magic xpa, it identifies the changed branch and loads the contents of the project repositories with the branch's name reflected in the Title bar.

Automatic Generation of Unique Version Control ID

While working with Git, Magic xpa takes the responsibility of generating developer IDs, so uniqueness of ISNs is guaranteed. Magic xpa creates developer IDs to assign unique ISNs to all the developers. It records these developer IDs in the file named **devids.txt**, which is created inside the folder in the uniqueness branch named **magicids**.

When you connect a project to Git for the first time, Magic xpa adds the following information into devids.txt file:

- Developer's ID
- Developer's Name
- Developer's eMail

When you open a Git project via xpa Studio, Magic xpa reads the uniqueness file and sets the developer's ID and Branch ID to create the ISN for that particular Developer for that specific project.

Automatic Identification of a Unique Branch

Similar to **devids.txt** file, Magic xpa maintains a branch ID file named **branchids_x.txt** in which it stores the active branch names and numbers to be able to identify a branch uniquely. The file is maintained in the uniqueness branch named **magicids** of the Git repository.

When you create a branch for the first time, Magic xpa creates *branchids_x.txt file* and pushes it to the uniqueness branch in the Git repository.

Note: You can work on at the most 64 branches.

Prerequisites for Working with Git

You will find a new option named 'Git Connectivity' under the menu **File > Version Control**. On selecting this option Magic xpa will check if:

1. TortoiseGit is installed
2. Compare and Merge is installed and configured
3. Developer eMail ID is configured
4. Developer ID is allocated for the current developer
5. A Branch ID is allocated for the current branch

If anything from the above was not done then Magic xpa informs you.

While adding a new project to Git repository, by default Magic xpa launches a Git connectivity check dialog to verify all required plugins, configurations, and settings. Once the project is added into Git, you can avail verification from **Version Control > Git connectivity check** when required.

Removal of Source Control Plugin Setting

Now that Magic xpa supports TortoiseGit by default, the **Environment** setting **Source Control Plugin** is removed, thereby relieving you from setting the type of Git Plug-in.

Overriding xpa Git Functionality

Magic xpa introduces a special flag named **SpecialDisableGITFunctionality**, which upon setting to 'Y' in Magic.ini disables all the Git-related icons and all the menu options under **File > Version Control** for a project added in Git version control.

This flag enables you to treat a Git project as a non-Git project and allows you to work with your project as though it were not in the Git repository.

Git Flow Commands

Magic xpa provides Git Flow commands as a recommended branching model. The Git Flow entries in the **File > Version Control > Git Flow** menu provide the following options:

- Git Flow Init - Initialize a directory as a Git Flow repository.
- Git Flow Feature Start - Start a Git Flow feature
- Git Flow Feature Finish - Finish a Git Flow feature

For more details regarding Git Flow, please see <https://www.atlassian.com/git/tutorials/comparing-workflows/gitflow-workflow> or other references to Git Flow.

Logging Git Commands from Magic xpa

You can log the commands generated by Git from Magic xpa. A special flag named **SpecialGITLog** is introduced in order to log them. The flag when entered under [MAGIC_SPECIALS] with the value **SpecialGITLog=<Filename with absolute path>**, all the direct Git commands executed in Magic xpa studio are logged in the given file.

Note: When developing with Git, Magic's **Compare and Merge** tool is mandatory. The tool is external to Magic xpa installation. It is available at Downloads Area (downloads.magicsoftware.com). The tool is licensed separately. Please contact your local branch/representative regarding its license.

General Enhancements

The following general enhancements are added in Magic xpa.

Support of HTML Format in Mail

In addition to Plain Text format, Magic xpa now enables you to send and receive mails in HTML format. You can set the mode of the format to 1 (Plain Text) or 2 (HTML) using a function named **MailFormatSet(mode)**.

Note: The support for HTML format is applicable only on Java mail framework.

Support for New Functions: FileOpenDlg and FileSaveDlg

Magic xpa introduces two new functions named **FileOpenDlg()** and **FileSaveDlg()**, thereby enabling you to upload and download the selected file(s) respectively.

Note: FileOpenDlg and FileSaveDlg functions are available in Online tasks only.

32-bit/64-bit Open JDK with Magic xpa Installation

Magic xpa now provides 32-bit and 64-bit Open JDK version 1.8 along with xpa installation.

Support to Handle SUPERVISOR_GROUP as SUPERVISOR GROUP

While working with LDAP/AD you can create **SUPERVISOR_GROUP** (underscore in between) instead of **SUPERVISOR GROUP** (space in between) and while validating against the security file, Magic xpa treats it as **SUPERVISOR GROUP** in order to assign supervisor rights to the users.

UI Enhancements

The following user interface enhancement is added in Magic xpa.

Scaling of RIA Forms, Frames, and Controls

Magic xpa now supports scaling of Forms, Frames, and Controls in RIA executing on desktops.

Migration Enhancements

The following migration enhancements are added in Magic xpa.

Label Control Border

A 2D Label control will be migrated from UniPaaS to Magic xpa with its borders as follows:

- Thick => 2D
- Thin => Windows
- No Border => No Border

Conversion of Edit Controls to Label Controls

While migrating an application from UniPaaS, Magic xpa enables you to convert an Edit control with Data set as an Expression and located outside the container control to a Label control with the same Expression as its Text. A new Command Line Option **UpEditWithExpToLabel** is introduced, which upon setting to 'Yes' enables this conversion.

RIA Enhancement

The following RIA enhancement is added in Magic xpa.

Enhanced Scroll Bar

In RIA, using **Scroll Here** option you can jump directly to the clicked position when **Scroll Bar Thumb** is set to **Absolute**. Magic xpa supports **Scroll Here** functionality for Preload View also.

Runtime Enhancement

The following runtime enhancement is added in Magic xpa.

New Event: Create Line Above

An Editing event named **Create Line Above** is introduced, which creates a record above the current record during Runtime. This event is supported in Online, Rich Client, and Web Client applications.

Database Enhancements

The following database enhancements are added in Magic xpa.

Enhanced Support for MySQL ODBC Gateway

Magic xpa's MySQL ODBC gateway now supports MySQL 8.x.

Support to Define Table Relationships

Magic xpa now enables you to define One-to-One (1:1), One-to-Many (1:N), and Many-to-One (N:1) relationships among the tables created in Magic Data Repository. Once the table relationships are defined, you can use the new APG (triggered by Ctrl+R) to generate programs based on those relationships.

Note: Defining relations is not supported on XML table.

Binding Support in Oracle Database

You can now use the binding (~) for the statements that do not return a result set.

Microsoft® SQL Server 2019 Support

Magic xpa was tested and is compatible to work with Microsoft SQL Server 2019.

Web Client Enhancements

The following Web Client enhancements are added in Magic xpa.

Re-initialization of the Context on Abnormal Termination of Sessions

Magic xpa introduces an **Environment** setting to handle re-initialization of the context when sessions terminate abnormally. The setting named **Reinitialize Web Client sessions on abnormal terminations** offers three options:

Yes: Reinitialize the context by default.

No: Do not re-initialize the context.

Alert: Issue an alert message to let the user decide whether they wish to reinitialize the context or not.

New Keyword: 'WebClientReInitSession'

You can use the keyword named **WebClientReInitSession**, which upon setting to 'A' in Magic.ini issues the same Alert message. The setting is effective on restarting Magic xpa Studio.

New Function: 'IsContextReInitializing()'

Magic xpa introduces a function named **'IsContextReInitializing()'** to indicate whether the context has been reinitialized after abnormal termination of application. The function when called from Main Program/Task Prefix returns 'TRUE' when the context is being reinitialized after crash.

Issuing Warning Message before Context Inactivity Timeout

Magic xpa introduces an **Environment** setting named **Context Inactivity Warning Time**. This setting enables you to set how much time before terminating the session you want Magic xpa to issue a warning message about termination of the session.

Note: For some Chromium browsers, the warning message is shown when the current browser tab is in focus.

New Keyword: 'ContextInactivityWarningTime'

You can use the keyword named **ContextInactivityWarningTime** to set the time in Magic.ini.

Support for Blank 'Zero fill' Characters in Numeric Pictures

The Directive for Numeric pictures is supported with blank 'Zero fill' characters. With this directive, Magic xpa fills the variable value with blanks if the variable value was zero.

Note: The characters other than blanks are not permitted in Directive of Numeric pictures.

Support for Blank Date and Time

When Date or Time is zero, Date Picker or Time Picker will display it blank respectively.

Customizable Date and Time Formats Defined on Magic xpa's Form

You can change Date and Time formats to be different than that defined on Magic xpa's Form. Please refer to Magic xpa help for more information.

CallJS() Supported in Web Client

Magic xpa now supports **CallJS()** function in Web Client tasks to let you call a JavaScript method of Magic Angular component.

Support for Character-level Binding

Magic xpa now enables you to define the level of binding between Edit control and variables. A property named **Binding Level** is introduced which lets you define binding option either as *Control* (where a variable receives a control's value on leaving the control), or as *Character* (where a variable receives a control's value on each character typed).

Support for Lazy Loading in Overlay Programs

You can now call Overlay programs from Load on Demand folder without Route.

Support for Client-Side Logging

A log level named **RequestInfo** is introduced, which upon setting in Web Client Application Execution Properties, the requests sent to server and their corresponding responses received from the server are logged on the console.

Notification of Change in Custom Properties Property

A method named **PropertyChanged()** is introduced, which on writing in the .ts file of the component notifies you about change in the value of Custom Properties property in Magic xpa. The method is invoked whenever value of any custom property changes.

Closure of Active Web Application's Browser Tab

When you change the contents of a Web page and attempt to close it without saving the changed contents, means **when the transaction cache is not empty**, Magic xpa raises a warning about the pending changes.

Note: On all browsers except Chrome the context is terminated after the context-inactivity timeout. On Chrome the context is terminated immediately.

When you do not change the contents of the Web page and attempt to close it, means **when the transaction cache is empty**, Magic xpa terminates the context immediately without issuing any warning.

No Confirm Update Dialog on Using Record Flush

Magic xpa does not issue Confirmation update dialog box on using Record Flush event.

Provision of Enum for Accessing Custom Properties

Magic xpa now provides Enum for Custom Properties so that you can access them easily.

Location Changed of displayedColumns[] Array

Earlier on generating an application containing Table control(s), the array displayedColumns[] used to be entered into `<component_name>.component.ts` file. The array is now entered into `mg.controls.g.ts` file to avoid updating the `<component_name>.component.ts` file each time a new column is added into the array.

Provision of Choice to Make Tasks non-Interactive

You have an option to make the Web Client tasks non-interactive.

Debugging Client Side Error Messages

Magic xpa now identifies the runtime path of the error message that might appear in Client-side browser console while debugging Web Client applications.

Microsoft® Visual Code IntelliSense Enabled

Microsoft® Visual Studio Code now identifies the binding and shows the drop down box of IntelliSense.

Mobile Enhancements

The following enhancements are added with respect to mobile.

Android

ZBar SDK is no longer supported in Android. Barcode is not supported via Zbar and sample project has been modified to use Pic2Shop on Android.

Android 10 Support

Magic xpa was tested and is compatible to work with Android 10.

Android Specific Functionality

Update the project target SDK and compatibility libraries to **API 29**: You need to upgrade Android SDK compatibility libraries to API 29 so that your custom applications developed for higher versions will work smoothly on your latest Android devices.

iOS

Replacing deprecated UIWebView with WKWebView

- Sample projects and previously missed-out references are updated as per WKWebView implementation.
- ZBar SDK is no longer supported in iOS. Barcode is not supported via Zbar and sample project has been modified to use Pic2Shop on iOS.

GigaSpaces Enhancements

The following enhancement related to GigaSpaces is added in Magic xpa.

GigaSpaces Version 15 with xpa Installation

The underlying GigaSpaces infrastructure is updated to version 15.

Behavioral Change

The following behavioral change is implemented.

Backward Compatibility for Virtual Values Rollback

In version 3.3e, Quit and Cancel events changed their behavior and rolled-back virtual variables to their initial values. This turned out challenging in the existing applications where xpa programmers required the changed values of the virtual variables after raising a Cancel event. To facilitate the previous behavior a flag named **SpecialKeepVirtualsOnQuitOrCancel** is provided.

SpecialKeepVirtualsOnQuitOrCancel

When set to Y, this flag facilitates the previous behavior of virtual variables retaining their modified values.

Note: In case Quit event is raised, Task suffix will receive the modified values for virtual variables.

Valid values: Y, N

Default value: N

New Special Flags

The following special flags are added in Magic xpa.

SpecialUnicodeDefaultExpressionArgument

This flag was introduced for default return type while converting string parameters used in expressions. Magic xpa has some expression evaluations where the returned string could be of type 'Alpha' (ANSI) though all the function parameters are Unicode as in `EvalStr('a'&'b')`. Upto xpa versions 3.2d, the default value of this flag was N. Means by default ANSI string was considered as return type. This was problematic to xpi because it converted Unicode strings to ANSI and lost the characters thereby getting '?' instead of characters. So from xpa version 3.2e onward, the default was changed to Y. Means, by default Unicode string was considered as return type.

Valid values: Y, N

Default value: N till version 3.2d, Y 3.2e onward

SpecialValNewPolicy

If the flag is set to 'Y', the following rules apply for the `Val()` function:

1. If the picture is too small for the digits after the decimal separator: cut.
2. For digits before the decimal separator: never cut.

If the flag is set to 'N' or it is nonexistent, then the previous behavior is retained.

Valid values: Y, N

Default value: N

Known Issue

As a consequence of upgrading to Visual Studio Isolated Shell 2015, there is a problem with the Form Designer ONLY while using `mgconstw.heb`. The scroll bars are displayed on incorrect side in the Form Designer for Forms and for Table controls. Despite this incorrect display, they behave properly at runtime.

Fixed Issues

#	Description
MXPA-88	A newly-defined Logical variable's 'Default value' property is displayed as 'True' instead of 'False' by default, when the 'Default value' property of the previously defined Logical variable was changed from 'False' to 'True' using mouse double click.
MXPA-128	The Edit controls in the Filter Box were not displayed properly when Font was applied to the Table's Column and Set Allow Filtering property of Column was set to 'True'.
MXPA-212	In a particular scenario, a Table definition done in MSSQL was applied on Magic xpa Data Repository where a Table was already present with one Index entry, then if a new Index was attempted to add above the existing Index, the Position index value was not getting recorded in Datasources.xml file, which resulted in Magic xpa Runtime crash.
MXPA-425	The function Val() did not return correct value according to the 2nd parameter if the number of characters in the 2nd parameter were less than the number of characters in the 1st parameter and 'N' was part of the 2nd parameter as in Val('1234', 'N3') erroneously returned 1234. Please see SpecialValNewPolicy in Release Notes.
MXPA-429	Magic xpa Component Interface Builder takes a long time (up to 2 sec) to open if a substantial number of Logical names were present.
MXPA-537	Magic xpa Help is updated with the information on the maximum number of Blobs allowed in various databases.
MXPA-2719	When an invalid number was entered in a numeric field and a User Event was raised on a Button click, both Online and RC programs displayed an error on Status bar and reset value to original. But when the same programs were executed on uniPaaS 2.0 onward, the expected event was raised in RC and was not raised in Online program.
MXPA-19628	When a Batch task was called from Main program multiple times, Menu flickered.
MXPA-19751	While using function DataViewToJson(), some unwanted characters 'ï»¿' were displayed in Blob variable.
MXPA-19896	A program having multiple query names after WITH clause in SQL command and the Result Database set as MSSQL, issued a DB error and discontinued execution.

#	Description
MXPA-19912	Edit Control Zoom Button was found visible when Show Zoom Button was set to 'True', and Visible and Enable properties were set to 'False' for Image Button type, and was seen enabled although Enable was set to 'False' for any Button type.
MXPA-19928	An error '[MgGui.dll] Property.RefreshDisplay(): Property 730 wasn't handled.' was recorded in mgerror.log if Owner Drawn property of Checkbox was set to True in Online task.
MXPA-19938	Magic xpa studio crashed when trying to select Simba Athena ODBC driver. Also, DB error 'Driver is not supported by the gateway' was displayed when clicking on 'Cancel' button in 'Select data source' window to select DSN name.
MXPA-19946	In UniPaaS the 'Mark Previous Char' event marked the selected characters in an Edit box whereas in Magic xpa, the event did not mark the selected characters.
MXPA-19967	The behavior of Magic xpa 4.5 and Magic xpa 4.6x was found different when a .Net decimal variable was updated with a decimal number. In Magic xpa 4.6x the decimal value was getting treated as a whole value.
MXPA-19979	When a RIA deployed on Broker as well as on GigaSpaces generated an error, it was found that on Broker the error was logged in detail whereas on GigaSpaces, the same error was logged briefly.
MXPA-20015	In case of a header detail scenario, if the header record was deleted, then instead of deleting its corresponding detail records, some other detail records were getting deleted. The header task used the condition stat(0,'D'MODE).
MXPA-20019	When you selected 'Magic Xpa Deployment Client' installation, Magic xpa help files used to get installed by default. Now you have a choice whether to install or not to install the help files.
MXPA-20024	In some specific environments, Studio performance was found degraded when performing actions like opening Program Repository or zooming into a program, or executing a program from Program Repository.
MXPA-20056	In RIA tasks, when cancelling a record which is connected to a subform, 'Record lost' error occurred. In such a scenario, moving to a new record created an empty record on the form as well as in the database.
MXPA-20068	On executing a Web Client application, when the browser was closed, the context remained opened. The context was released only when the 'ContextInactivityTimeout' was expired. This erroneous behavior was observed only on Google Chrome browser.

#	Description
MXPA-20143	The function Len() returned incorrect value when Unicode type parameter was passed to it.
MXPA-20271	If the function ClientFileRename(origin, target) contained only the filename (without its path) as the Target parameter, it previously worked like a Move operation on the current working directory. Now in such a case, it will perform the operation on the source directory itself.
MXPA-20441	In Web Client tasks, MLS translation did not work when logical names were used in Language File path of Language Repository.
MXPA-20479	A redundant confirmation dialog box was getting displayed in Version Control with the message 'Entering read-only mode', when attempted to open a program that was not checked-out at first place.
MXPA-20550	While executing an SQL Stored Procedure in an MSSQL Database application, a blank dialog box was getting displayed and the error 'Error in executing SQL command...' was getting recorded in mgerror.log.
MXPA-20620	In case of Online tasks, the focus was unduly getting shifted to Parent task from Child task when a Timer handler having Raise event (View Refresh/Screen Refresh) or Verify operation was getting executed.
MXPA-20645	The information regarding 32-bit and 64-bit Server and Database Client combination was not found in xpa help documentation.
MXPA-20648	When a Web Client application was executed from Studio with Deployment Mode set to 'Runtime', RunMode() function returned incorrect value.
MXPA-20652	While working with multiple Class 1 GUI Output forms, when a reference from Find Results pane was clicked, the control did not jump to its corresponding matching result. The same behavior was found in case of Checker error.
MXPA-20674	An Online application was found to crash at runtime when its Parent window was set as 'Task in focus' and a button was clicked in the Parent window after a Subtask having Control Hit event with Propagate property set to 'No' was called.
MXPA-20675	Print Data functionality did not display all existing files in the directory when 'All Files' (i.e. *.*) option was selected in File Open dialog.
MXPA-20715	In a particular scenario on iPad devices, an iOS application was found to crash.
MXPA-20717	When Transparent colors were applied to Label, Edit, or Line controls and when they were placed into the Table control's Column Header, the controls were displayed neither during Form design time nor during runtime. Also, the same

#	Description
	controls when placed inside the Table were not getting displayed during design time.
MXPA-20743	The Magic xpa Studio was getting stuck during ECF creation activity using Tools Infrastructure when AutomaticProcessingMode was set to 'B'.
MXPA-20784	In a particular scenario, when a Windows application such as Notepad, Excel, etc. and Magic xpa were co-running, and when Magic xpa invoked a Batch task with Open task window set to 'Yes' and Window type set to 'Child', then Magic xpa Batch task kept appearing intermittently while working on that Windows application.
MXPA-20798	The behavior of uniPaaS and Magic xpa 3.3 (both Japanese versions) were different with respect to displaying logon window when it was given as a command line argument. In uniPaaS the logon window was displayed with Username and Password whereas in Magic xpa 3.3, the logon window was displayed with only Username. The issue is fixed now.
MXPA-20799	In a particular scenario on iPad devices, an iOS application was found to crash while performing a general search.
MXPA-20832	In MSSQL gateway, when the function CndRange() was used on DateTime column, it failed at Runtime and threw the error 'Incorrect syntax near the keyword 'AND''.
MXPA-20866	XMLInsert() returned error -6 "Attribute already defined for element" while adding an Attribute to an Element in an existing XML, even though the Attribute was not defined.
MXPA-20922	A Table with Checkbox/Button controls was found to get loaded slower than the Table without Checkbox/Button controls in it.
MXPA-20955	In a particular scenario on the Japanese environment migrating the application, two Radio buttons having different height and same Y value placed on a Form in uniPaaS were found to have changed their positions in Magic xpa 4.6.
MXPA-20960	Radio Button was getting slightly cut when Radio control's Vertical Alignment property was set to 'Top', Multiline property was set to 'False', and Font Size was inherited from the Radio control's default Font size.
MXPA-20964	If an Expression ('False''log) was attached to Confirm Update property and a record was attempted to delete, then the Confirmation Dialog was appearing in RIA unlike in Online task. This erroneous behavior taking place in RIA task is now fixed.

#	Description
MXPA-20983	When a Magic 9.40 application was migrated to uniPaaS or Magic xpa, some of the default images of Menu icons were observed to be incorrect in uniPaaS 1.9p and some default icons were missing from Magic xpa 4.7.
MXPA-21004	In Create mode, it was impossible to enter a value in an Edit control when a User event was executed with Force Exit set to Post Record Update, and a Batch program was called to update a variable in Record Prefix.
MXPA-21012	When an application was migrated from uniPaaS 1.9 to Magic xpa 4.6 and when a .Net Object for Date was used, then while setting Date '00/00/0000' to .Net Month Calendar Control, uniPaaS issued an exception whereas Magic xpa did not issue any exception.
MXPA-21061	When Cache Strategy was set to 'Position' for parent program to 'None' for child program, then the control was getting parked on an undesired column in the Table while trying to park it on a particular column.
MXPA-21118	When 'VCProjectID' was changed in the project, it was found that the node_id and parent_id on loading the XSD file were different than the node_id and parent_id after reloading the same XSD file.
MXPA-21180	The value of the next record was getting displayed momentarily and intermittently in the field of the previous record while navigating through the records in a Table, when Record Prefix had Wait property (Invoke Operation) in GUI. It was observed that the delay was apparently caused due to calling several Online Phantom tasks from Record Prefix.
MXPA-21182	The Parallel Batch programs did not execute when tried them using GigaSpaces middleware.
MXPA-21254	When SpecialFirstRangeOnEmptyField was set to 'Y', Range property was set for an Edit control, and the value in the Edit control was deleted, then the Edit control displayed a blank instead of the first value defined in the Range property.
MXPA-21280	In a particular scenario, an application crashed. The reason is identified and fixed now.
MXPA-21301	In RIA, on opening a project from uniPaaS 1.9 to Magic xpa 2.3 or a version latter, the Edit controls were getting displayed with Vertical Alignment as 'Center' instead of as 'Top'.
MXPA-21310	On migrating an application from uniPaaS to Magic xpa, the value of Edit control was getting trimmed by one pixel from the left-side when the Edit control's Style

#	Description
	property was set to 3D-Sunken and the Horizontal Alignment property was set to Right.
MXPA-21313	If MLS was used, then the label controls displayed in a PDF did not change according to the MLS language selected.
MXPA-21319	When a Label control's Style was set to any style (other than 'No Border') and when it was placed in a Table control with Alternating BG Color defined, the Label control Border did not appear in the Table.
MXPA-21349	In Web Client tasks, when APG was performed on a Program with Form Size option set to 'As Content', the Form was not getting created large enough to accommodate all its contents without a Horizontal Scroll Bar.
MXPA-21373	In a particular scenario, an Internal Event used on a Button worked fine but a User Event, which in turn raised a Cancel event on a Button, did not work.
MXPA-21379	The value of the next record was getting displayed momentarily and intermittently in the field of previous record while navigating through the records in a Table.
MXPA-21465	After migrating RIA and Online projects from uniPaaS to Magic xpa, the Control Hit event handler which was not getting executed in uniPaaS was found to get executed in Magic xpa, when clicked on the Table's Scroll Bar.
MXPA-21491	In a particular scenario, an Android mobile application crashed. The reason is identified and fixed now.
MXPA-21494	While using the SQL statements UPDATE or INSERT on Japanese machines, the '\n' (Newline) characters were getting replaced with white-spaces.
MXPA-21499	If HTTPCall(Post) was invoked for a specific URL, an error 'invalid_request' was issued.
MXPA-21578	On migrating an application from uniPaaS to XPA 4.6, it was observed that the query 'SELECT VERSION FROM V\$INSTANCE' was being sent to Oracle DB although the flag 'LimitLinkToSingleFetch' was set to 'No'.
MXPA-21616	Magic xpa Help is updated with the information about MySQL & SQLite databases being supported with MGXTK, MGXRT, and MGXSRV license types.
MXPA-21697	On deleting any record(s) barring the last record from the Table, the Button control or Checkbox control were found to be present on the last record's row, when the last record itself was absent.

#	Description
MXPA-21710	If two Link Write operations were executed to write data in a Table, then the second Link Write operation failed to write the data if it was performed in a RIA Non-Interactive task.
MXPA-21743	When a Batch program was being executed on setting the special flag 'SpecialKeyboardBuffering' to 'E' in Magic.ini, the Runtime window being in focus did not close on pressing the Esc key upon switching to some other program window and returning back to it.
MXPA-21791	Files of size 0-bytes were found left in Linux TMPDIR after an xpa process was finished in case TMPDIR was set to a non-default location. Also, MgxpaTempClasses subdirectory was found left in TMPDIR.
MXPA-22467	In Magic xpa Studio, the controls like .Net, Edit, and Label were impossible to bring in front of the Subform control.
MXPA-22715	If either of 'DATA' or 'SESSION' strings were used as a parameter in GetParam() function, then the function returned Null.
MXPA-22751	While executing Online and RC programs when an Edit control's 'Show Zoom Button' property was set to 'True', the Edit control's zoom button placed on the Subform appeared narrower than the Edit control's zoom button placed on the parent form.
MXPA-22759	Magic xpa Help is updated with the information about the reasons why requester reset the connection to xpa server.
MXPA-22765	Magic xpa Help is updated with the information about the reason why scrollbar is visible even when there are less number of records than the view size.
MXPA-22779	While executing Online and RC tasks when an Edit control's 'Show Zoom Button' property was set to 'True', the Edit control appeared without its zoom button on the Subform.
MXPA-22804	On iOS devices while executing a RIA program using HTTPS protocol, it was found to issue an error, 'This session was closed by the server (-197)'.
MXPA-22906	During runtime, the password that was defined as a Secret Name in the database was erroneously remaining readable and available in the memory via dumps of the Runtime engine.

Magic xpa 4.6.3

We are delighted to present Magic xpa 4.6.3 with enhancements.

Database Enhancement

The following general enhancement is added in Magic xpa.

Oracle - Ability to Determine SQL type for DSQL String Binding

Since Magic xpa version 3.3a, the expressions used to bind Direct SQL parameters for Oracle are bound as NVARCHAR instead of VARCHAR2.

A DBMS flag named **DSQL_STRING_BIND_VARCHAR** is introduced in order to allow you to use VARCHAR as the type for binding. This brings back the behavior before Magic xpa version 3.3a. Upon setting it to 'Y', binding of string values using expressions is done as VARCHAR2 instead of NVARCHAR. This is relevant for Direct SQL commands using '~' for Oracle binding.

Fixed Issues

#	Description
MXPA-21360	In a Rich Internet Samples program, when a record of a Table having a multi-segment index on numeric fields was attempted to update, Magic xpa issued an error 'Operation failed. Record has been changed by another user or process'.
MXPA-21409	Calling a User-Defined Function defined in the Main program took more time as compared to previous xpa version i.e. xpa 3.x.
MXPA-21413	The text in an Edit control was aligned incorrectly when an expression was used in the Format property.
MXPA-21573	While trying to close a Phantom task, it reappeared at a different position when called from Record Prefix, Task Prefix, or from a Button Handler. This happened if Call Task was done using a Destination.

Magic xpa 4.6.2

We are delighted to present Magic xpa 4.6.2 with new features and enhancements.

General Enhancements

The following general enhancements are added in Magic xpa.

Support of RC5 Methods in Cipher() DeCipher() Functions

Magic xpa now supports the use of **RC5 Encryption** method in Cipher() and DeCipher() functions.

Removal of Component Logging

You can now customize the behavior of component logging while loading a Magic component (ECF) at the time of opening a host application. A special flag named **SpecialComponentLogging** is introduced in order to customize the behavior of component logging.

SpecialComponentLogging

The flag upon setting to 'N' prohibits the following two lines to be displayed in the engine log:

- Starts loading component
- Ends loading component

Valid values: Y, N

Default value: Y

Removal of ANSI Blob NULL Check

You can now customize the display of the warning message about presence of a NULL in an ANSI Blob. A special flag named **SpecialAnsiBlobCheckNull** is introduced to customize the behavior.

SpecialAnsiBlobCheckNull

The flag upon setting to 'N', disables the functionality of showing the warning message that informs about presence of a Null character in an ANSI blob. When this special flag is set to 'Y', the Null Blob check is performed and as a consequence, the warning message, "Null in an ANSI blob, possible loss of data" is displayed; if a Null character was found.

Valid values: Y, N

Default value: Y

Fixed Issues

In this update we addressed performance-related issues and carried out some internal optimization.

Magic xpa 4.6.1

We are delighted to present Magic xpa 4.6.1 with new features and enhancements.

General Enhancements

The following general enhancements are added in Magic xpa.

New Function `UserRightGet()`

A function named **UserRightGet()** is introduced to retrieve the rights of the logged-in user.

New INI Parameter: `MailFramework`

A new INI parameter named **MailFramework** is introduced, which specifies the underlying framework used for mail functions.

When set to 'J' (Java), the mail functionality will be based on Java and when set to 'L' (Legacy), it will be based on the legacy technology.

Valid Values: J, L

Default Value: L

The setting is not available via Settings > Environment interface.

Magic.ini and Command Line name: MailFramework

Support for TLS and SSL for Mail Functions over Java Framework

TLS and SSL mail functionality is supported only over Java framework. To enable you to choose among SSL, TLS, or Plain, a new argument named '**protocol**' is introduced in **MailConnect()** function, which is regarded when **MailFramework=J**. The argument **protocol** can accept either of the three values: 0 (Plain), 1 (TLS), and 2 (SSL).

Note: The existing applications will not be affected, as **protocol** is an optional argument. If the **protocol** argument is not mentioned in an existing call to MailConnect() function, then the value 0 (Plain) is regarded.

Removal of Special Flag '`SpecialRIAEcryptAES`'

The special flag **SpecialRIAEcryptAES** is removed from Magic xpa Help.

UI Enhancements

The following user interface enhancements are added in Magic xpa.

Enhanced Form Scaling Options

The Combo box on the Status Line provided for scaling the active form during Runtime now presents enhanced scaling options such as 110%, 120%, 130%, 140%, 150%, 175%, and 200%.

Scaling of GUI Frames Forms

Allow Scaling property which was previously present in GUI Display forms is now also added for GUI Frames forms. Scaling of GUI Frames forms is now exactly same as the scaling of GUI Display forms.

Database Enhancements

The following database enhancements are added in Magic xpa.

64-bit Gateway for AS/400

Magic xpa now provides 64-bit gateway for AS/400. The name of the dll file for AS/400 gateway is changed from mgeac32.dll to **mgeac.dll**.

32-bit Gateway Users:

1. All Invoke UDP operations related to this DLL will have to be modified from mgeac32 to mgeac.
2. The MGDB16=mgeac32.dll entry in the Magic.ini file will have to be changed to mgeac.dll in case of upgrade installation.

64-bit Gateway for DB2/400

Magic xpa now provides 64-bit gateway for DB2/400.

Web Client Enhancements

The following enhancements related to Web Client are added in Magic xpa.

Control Verification in Web Client

Control Verification is now supported for Web Client tasks.

Note: Magic xpa executes all Control Verification handlers in the current task just before executing Record Suffix. Control Verification handlers are executed in the order of their definition in the task.

New Property: Custom Validators

Custom Validators property is introduced to enable you to define a set of validators. If the condition in an expression against a validator is evaluated to 'True', then an error message is displayed.

Mobile Enhancements

The following mobile enhancements are added in Magic xpa.

iOS

Support for iOS 13: Rich Internet Applications can now be executed on iOS 13.

Support for XCode 11: Magic xpa 4.6.1 is compatible to work with Xcode 11.x.

Backward Compatibility Enhancement

The following backward compatibility enhancement is added in Magic xpa.

Flag for Space between Radio Button and its Label

To maintain the appearance of Radio button compatible with its appearance in version V9.4, the flag **SpecialRadioSpacingV9Compatibility** is introduced.

SpecialRadioSpacingV9Compatibility

The special flag **SpecialRadioSpacingV9Compatibility** when set to Y, creates an adequate space between Radio button and its Label.

Valid values: Y, N

Default value: N

Fixed Issues

#	Description
MXPA-143	In Magic xpa help, an incorrect license token was displayed for Web Client.
MXPA-215	Magic xpa was found to crash with an error message, "The folder <folder name> (set by the environment variable JAVA_HOME) is missing mandatory sub folders: 'jre' and 'bin\\server'.", if the executing program had Java functions such as JCall() or JCreate().
MXPA-224	In xpa installation, the option 'WinRunner Support' was renamed to 'Support Test Automation Frameworks/Tools'.
MXPA-251	The help pages named 'Java Environment' and 'Java Integration with Unix Platforms' were found to be missing in the Help of latest xpa versions.

#	Description
MXPA-18681	Not all the user-defined .NET events for user controls were visible in the event list with a specific DLL of the customer.
MXPA-19433	An unknown screen was displayed in the upper-left corner on minimizing or maximizing the called Modal window in case a program was called from a non-interactive task with Raise event's Wait property set to 'No'.
MXPA-19442	When some multiline text was sent via MailSend() function, the text lost its format.
MXPA-19476	Mgerror.log displayed the error, 'There is a mismatch in return attribute of function', on executing a user-defined function having return type as Java variable which was the part of Data View.

Magic xpa 4.6

We are delighted to present Magic xpa 4.6 with new features and enhancements.

UI Enhancements

The following UI features and enhancements are added in Magic xpa 4.6.

Form Scaling

You can scale the client area of an active form of the type SDI, MDI, and child window during runtime to different sizes such as 200%, 300%, 400%, and 500% by using a combo box provided on the Status bar. You can set the flag **SpecialFormScalingByDefault** to 'Y' to set the value of **Allow Scaling** property for all the GUI Display forms in the project by default.

SpecialFormScalingByDefault

If this flag is set to 'Y', then the default value of **Allow Scaling** property will be 'True' and the form will be scalable. This means if **Allow Scaling** property is not broken, its value will be 'True'. If the property is broken, the broken value will be used.

If this flag is set to 'N' (or is nonexistent in Magic.ini), then the default value of **Allow Scaling** property will be 'False' and the form will not be scalable. This means if **Allow Scaling** property is not broken, its value will be 'False'. If the property is broken, the broken value will be used.

Valid values: Y, N

Default value: N

Note: The use of Runtime Form Designer is not supported for the forms that allow scaling.

Freezing Table Columns

Now you can set the desired number of columns in a Table control to remain frozen while scrolling the Table horizontally. The frozen columns are marked by a dark grey-colored divider by default. You can choose a color to demarcate the frozen columns from the rest. When you save a task containing tables with frozen columns and reopen it, the frozen columns that you saved last time are retained.

Note: There is no support to freeze table columns in RTL tables.

Zoom Button for Edit Control

You can add a Zoom button [...] next to the Edit control, which on clicking raises Zoom event. You can also customize the Zoom button's look and feel.

Autocomplete for Edit Control

You can autocomplete the text while typing, using a new property named **Autocomplete Mode** available for Edit control.

Flag for 3D-Sunken Radio Button Colors

In order to provide backward compatibility with uniPaaS and retain the current behavior of 3D-Sunken Radio button's background and foreground colors in xpa, a special flag named **SpecialUseColorForRadio** is added.

SpecialUseColorForRadio

If this flag is set to N, the background and foreground colors are disregarded.

Valid value: Y, N

Default value: Y

Flag for Owner-Drawn Checkbox

In order to provide backward compatibility and mark the checkboxes as owner-drawn, a new property named **Owner Drawn** and a special flag named **SpecialCheckBoxOwnerDraw** are added.

SpecialCheckBoxOwnerDraw

When this flag is set to Y, all the checkboxes with their Appearance property set to Box in all the applications will be owner drawn.

Valid values: Y, N

Default value: N

Auto Drop-down for Combo Box Control

You can make the Combo Box in focus drop-down automatically and view its items immediately using a new property **Auto Drop-down**.

Setting Color for Disabled Edit Control

You can set a color of your choice for the disabled Edit control.

Controlling Border Property of 3D-Sunken Edit Controls

While migrating your uniPaaS applications to Magic xpa, you have an option for controlling the Border property setting for 3D-Sunken Edit Controls in the Migration wizard.

Setting Table Control Title's Background Color

While migrating applications from uniPaaS to Magic xpa, you can set the Table control title's background color.

Studio Enhancements

The following enhancements related to studio are added in Magic xpa 4.6.

Copy-Paste Logic Lines across Tasks

You can copy and paste Logic, Data View, and Header lines across tasks located within the same program or outside it.

Long Names for Tasks, Programs, and Forms

You can enter Task Name, Program name, and Form name as long as 100 characters.

General Enhancements

The following general enhancements are added in Magic xpa 4.6.

Unicode Arguments for Mail Functions

Mail functions of Magic xpa support Unicode arguments.

Apache Tomcat Installation Upgraded

Apache Tomcat is upgraded from 7.0.62 to 9.0.20. The previously deployed Web Services should be copied to "%tomcat_home%\webapps\axis2\WEB-INF\services\".

Web Client Enhancements

The following enhancements related to Web Client are added in Magic xpa 4.6.

Display of Spinner

You can display spinner on the page(s) of your Web Client application when the server processes lengthy requests. You can also customize the spinner.

Accessing Form Controls from HTML

A new **Controls Accessor** component named `<component name>.mg.controls.g.ts` is introduced to enable you to access Form controls and their properties from the relevant HTML file. The Controls Accessor component implements easy validation for Form controls in html.

Enhanced Web Application Generation Dialog Box

You can see the list of programs you select to generate a Web application along with the folder names in which they are created.

New Concept Paper

The following concept paper is added in the help:

Using Magic Components in Web Client Applications

You can find it under the link Home > Concept Papers > Developing Web Client Applications.

Database Enhancements

The following enhancements related to databases are added in Magic xpa 4.6.

Native PostgreSQL Database Gateway

PostgreSQL database gateway is supported natively, which is compatible with PostgreSQL 11.5. You need to procure its license separately.

Support for Physical Locking in MySQL Gateway

Magic xpa now supports physical locking in MySQL gateway. The physical locking works with MySQL server version 8.0. It can be enabled using the flag `SQL_PHYSICAL_LOCKING=Y`.

Support Oracle 18 and 19

Magic xpa was tested and is compatible to work with Oracle 18 and 19.

Scrolling to the Desired Record

It is now possible to jump directly to the desired record using Table scrollbar. For more details, please refer to Magic xpa help.

WITH Clause

You can use 'WITH' clause in Direct SQL statements.

Temporary SQLite Database Files

Now SQLite database also can be used as a Temporary database in the **Environment** setting 'Database for Sort/Temporary' under the Preferences tab.

A database information flag named **TEMP_DB** is introduced in order to define a Temporary SQLite database. For more details, please refer to Magic xpa help.

New Keyword: 'DataTypeCompatibility'

A keyword named **DataTypeCompatibility** is introduced in DB Information, which upon setting to 'Y' in the database properties of MSSQL database makes the new MSOLEDB driver handle the data in the same way the legacy SQLOLEDB driver handles it.

GigaSpaces Enhancements

The following enhancements related to GigaSpaces are added in Magic xpa 4.6.

Determining Status Update Rate

SpecialGSWorkerStatusUpdateRate

This special flag determines the number of seconds at which the worker updates its last modification time periodically.

For example, if $N = 5$, then the worker will update its Last modification time every 5 seconds.

Valid values: ≥ 1

Default value: 10

This special keyword can assist in distinguishing between non-responsive workers and genuinely busy workers engaged in executing long requests.

Provision of Workers Dynamically

The NumberOfWorkers element in the ProjectsStartup.xml file is now enhanced. According to this enhancement, the Server will create additional Workers if the current Workers count is less than $(\text{NumberOfWorkers} + \text{AdditionalOnDemand})$, and a request waited longer than 'LoadOnDemandTimeout' seconds before processing it, even with available licenses.

Workers Pane

It is now easy for you to distinguish non-responsive workers from the workers busy executing long duration programs while using GS middleware. A pane is provided to display the workers of the selected server.

RIA Enhancements

The following enhancement related to RIA is added to Magic xpa 4.6.

Client-side Cache Clearing

A function named **ClientClearCache()** is introduced, which on passing a logical argument 'True' clears the local cache of Rich Client tasks immediately.

Mobile Enhancements

The following enhancements related to Mobile are added in Magic xpa 4.6.

Android

64-bit Compliance

Magic xpa Android client is now 64-bit compliant.

Android and iOS

Client-side Cache Clearing

A function named **ClientClearCache()** is introduced, which on passing a logical argument 'True' clears the local cache of Rich Client tasks immediately.

Keeping the Device Awake

A property **Keep Awake** is provided for Rich Client Display forms to facilitate keeping the device awake. When the property is set to 'True' and when the current form is active, the device remains awake.

Browser Client Deprecated

As of Magic xpa 4.6 Browser Client feature is declared as deprecated, it will be removed from the Magic xpa offering in a future release.

Fixed Issues

#	Description
77124	A Window Hit event defined in a subtask with Propagate set to 'No' caused the child window to move to the background while clicking on the parent Form or the title.
149898	In a particular scenario, a RIA crashed while sorting with UserFunctionality Ctrl+T.
152600	CndRange() function was found to be executed when the 'False' value was passed as its argument.
153045	When a Model was applied to an SQLite Table name and clicked on 'Inherit All Properties', DB Column name was found to be removed.
155980	The mls_bld.exe file was not getting converted properly according to the source file.
156805	Magic xpa Documentation updated for RIA License count.
157065	If there was a space at the beginning of the task variables, 'DataViewToText() - Illegal task variables specified' message was displayed.

#	Description
157296	Magic xpa Studio crashed when Default Database with XML Data Source in Database was used and clicked on Data View of a program.
157309	Two Online programs behaved differently when Cnd was set to 'No' for a batch.
157499	When a Label control was placed on the Table header, the higher Z-order was displayed in the back instead of in the front.
157561	In an Online program, the message 'Valid control input range is: ' was displayed when Range was not set.
157659	When control verification had an Internal event 'Subform Refresh', the cursor was found to be parked on the second Edit control of the called program.
157969	In a specific scenario, Magic xpa Runtime engine crashes in the host application.
158486	DBErr() function returned only 255 characters when a custom error message was longer than 255 characters.
158639	Decimal Parsing snippet returned an incorrect value.
158646	On an iOS device with the language set to Japanese, Null character appeared at the end of the fields automatically.
158742	In a particular scenario, Magic xpa Studio crashed when a user-defined function from the Main program was called in a Batch program using Evaluate operation.
158798	The Push Button was found in disabled state erroneously when an event was raised using GetParam() function.
158938	When a non-interactive program was called from an interactive program, WinMinimize() function on executing second time onwards did not work.
159054	Radio Button was found to have incorrect Vertical Alignment on migrating from UniPaaS to Magic xpa.
159055	The column title was found cut after migration.
159285	On a particular version of iOS, when the Japanese language was set, the data was not extracted.
159505	When the incremental update was set to 'Y', the variable Init was recomputed at the last record.
159534	Magic xpa Studio crashed while activating F8 on an RC program if 'Else Block' was disabled in the program.

#	Description
159714	A Push Button on a phantom task having zero records was seen as disabled when its Enabled condition was set to 'True'.
159789	The Internal event 'Mark Previous Char' was found working incorrectly at the end of the first character in an Edit box.
159810	When the encrypted text in Blob was tried to save using function Blb2File(), garbage data was displayed.
159906	If Color property was set to GUI Display in Data View, and if a 3-D style was applied to a control on the form, a new color of the reference color was found to be created for it after migration.
160524	Data was not displayed on navigating among pages using Back and Forward buttons, a Route event was raised in parent program and it was invoked from one of the two sibling programs.
161179	An error "Uncaught Reference Error: global is not defined." was returned while executing Web Client programs due to the newly introduced Angular behavior.
161289	Space was getting selected in the text selection for a Virtual variable of picture size '<space>X10', when reparked on the Edit control using the Tab key.
161466	The function Rights() was found to return an incorrect value for 64-bit engine using Active Directory.
161704	On iOS device, CndRange() function was found to be executed in a particular scenario on Local DB tables although 'False' value was passed as its argument.

Magic xpa 4.5a

We are delighted to present Magic xpa 4.5a update with new features and enhancements.

Web Client New Features

The following new features are added in Magic xpa 4.5a.

Support for Calling an Overlay Window Present in a Web Module Marked as Load on Demand

Now you can call an Overlay window present inside a Web module, when the Web module marked as 'Load on Demand' is loaded.

Note: If you have any projects generated in Magic xpa versions prior to 4.5a, you need to perform certain steps. Please refer the help topic **Home > Reference Guide > Navigation and Workspace > Repository Manipulations > Web Module Properties**.

For new projects generated in 4.5a, those steps are not required as the generation process handles them.

Web Client Enhancements

The following features are enhanced in Magic xpa 4.5a.

Support for Angular 8

Magic xpa 4.5a update supports Angular 8 for Web Client. You are required to use node.js version 10.9 or greater.

To upgrade your Magic xpa Web Client applications from Angular 7 to Angular 8, please refer the help topic **Home > Mastering Magic xpa > Web Client Application Development > How Do I Upgrade Magic xpa Web Client Applications from Angular 7 to Angular 8?**

Enhanced Table Row Editing

To enhance the functionality of row editing in a Table, in addition to the existing Angular function **isRowInRowEditing()**, a new Angular function **mg.isCurrentInRowEditing()** is introduced. The later enables you to edit a row in a table when the controls are part of the logical record but not inside the table.

You need to use this method only while using the controls outside the Table control and if the current row is in row editing status.

Support for Customizing Error Message

Magic xpa 4.5a update enables you to write a custom error message using **mgError** tag.

Support for Web Application Generation from Inside a Program

You can generate a Web Client application while being inside a program. The program in working is automatically saved before application generation.

64-bit Runtime Features

The following features are provided in Magic xpa 4.5a Runtime.

Support of WMQSeries

WMQSeries is supported for 64-bit xpa Runtime Engine.

XXLNumericSize Special Flag Set to 'Yes'

For Magic xpa 64-bit Runtime Engine, the default value of the special flag **XXLNumericSize** is set to 'Yes' internally. If you set this flag to 'No' in Magic.ini, Magic xpa overrides your setting. For 32-bit Runtime Engine, the behavior remains unchanged.

General

The following concept paper is added in the help and in the documentation:

Connecting Magic xpa with Git Repository.pdf.

Fixed Issues

Defect	Description
157537	In a Web Client task, 'Index out of bounds' error occurred when the task had a Link Query, the number of records were less than a page, and the Create Line event was raised.
157839	While invoking an Overlay window, when the second record was attempted to create in a table, 'Duplicate index' error occurred.
158366	In SFDC project FactoryMaster(Access), the server requests in a Subtask triggered the server requests for parent task when the parent task had main source with Link Query/Locate and an Expression in Init of a Variable causing server-side operation.
158732	Studio crashed when 'vcgantt', a third-party control was dropped on a Form.

Magic xpa 4.5

We are delighted to present Magic xpa 4.5 with the addition of some interesting features and enhancements, as well as removal of some features.

Support for 64-bit Server Engine

Magic xpa version 4.5 comes with 64-bit server engine supported in background mode in order to take utmost benefit of a 64-bit operating system. The following points are concerned with 64-bit server engine support:

- In case of Studio product installation, the default selection for 64-bit engine support is according to the Operating System (OS). For 64-bit OS, both 32-bit and 64-bit xpa engines are installed. For 32-bit OS, only 32-bit xpa engine is installed.
- In case of Server product installation you can select either from 32-bit and 64-bit Server product installation.
- While adding 64-bit pointers to buffer you need to take care of adjusting positions of the next members in the buffer so that the application can be used with 32-bit and 64-bit xpa engines.

Unsupported Gateways

All gateways except the below ones are supported:

- AS400/Db400 gateway
- Gigaspaces gateway
- Web Service gateway

Unsupported Runtime Features

- MgComCreator
- DDE
- WMQ

Discontinued Provision of Other Runtime Features

- Java installation that earlier came bundled with Magic products installation is now discontinued. You need to install Java separately.
 - **For Studio product installation:**
 - Always set 32-bit Java in all configuration files (even Web Requester of GS is 32-bit).
 - In Magic.ini, set both JAVA_HOME_32 and JAVA_HOME_64 (if installed).

- **For Server product installation:**
 - 64-bit: Always set 64-bit Java in all configuration files.
 - 32-bit: Always set 32-bit Java in all configuration files.
- **For Desktop Client product installation:**
 - Always set 32-bit Java in all relevant configuration files.
 - In Magic.ini, set only JAVA_HOME_32 (if installed).

Once you install Java, you can use Magic's utility **MagicJavaConfig** to set a new/update the existing JAVA_HOME path in various configuration files of xpa.

- Hardware Based Licensing (HASP) will be supported only in 32-bit products and components installation.

Web Client New Features

The following new features are added in Magic xpa 4.5.

New Events

The following new internal events are introduced:

Subform Close

The **Subform Close** event explicitly closes the running task in the specified Subform control and returns the Subform to 'None' state.

No Program Execution Right

The **No Program Execution Right** event is raised when the user trying to execute the program did not have the program execution right.

New Function mg.SimulateClick()

A new function **mg.SimulateClick()** is introduced for enabling you to raise Magic events from Angular.

New Authentication Functions

Magic xpa 4.5 provides the following new functions to enable you to work in anonymous and authenticated sessions.

3. **IsLoggedIn()**: Checks if a user is logged in or not.
4. **Logout()**: Logs-out a user from the on-going session.

Sophisticated Web Application Generation

Magic xpa update brings you a sophisticated Web generation output dialog with the provision to display the generation progress. The dialog shows the progress of generation in the step-by-step manner in the order of the tasks completion. The generation output dialog box stays on the screen

until you close it. You can press the image buttons next to each step of generation to view the filtered log for the desired task.

Support for Sophisticated Functions under Web Menu

Integration with Microsoft® Visual Code

You can now open the generated project in Visual Studio Code by selecting the option **Open in Visual Studio Code** under Web menu.

Support to View Recent Generation Log

You can view the log of Web application generation recorded in the file `nodejs.log` file by selecting the option **Show Recent Log** under Web menu.

One-click Minimization of Modals

Now you can minimize and restore multiple modal windows in a single click. Magic xpa update introduces a new flag named **SpecialAllowMinimizeAllModals** to provide minimization of modal windows.

SpecialAllowMinimizeAllModals

When you set this flag to 'Y' and when you have multiple modal windows open, then clicking on the minimize button of the modal window in focus minimizes all the windows in the runtime tree.

Valid values: Y, N

Default value: N

Support for Ability to Modify the Code during Runtime

Now you can make changes to the Web Client project files while the runtime engine is executing in the background. All you need to do is set the value of the option 'Run project as' to 'Web Client' and set the 'Edit Project mode' on.

Support for Ability to Change the Program during Runtime

Now you can select another startup program and execute it without the need to stop and start the runtime engine while one program is already executing.

Web Modules for Better Folder Management

Instead of the **ngModule** that includes all the Magic components, you can now create independent Web Modules per folder for your Web Client applications, which can be generated and loaded on demand.

Utility to Check Availability of Required npm and node.js Packages

Magic xpa now provides a way to verify the Web environment on your computer. It determines if the **npm** and **node.js** Angular packages are installed and if they match the required versions.



Provision of New Property: ConfirmUpdateForWebClient

In order to override the default value of Confirm Update for Web Client tasks, a new property named **ConfirmUpdateForWebClient** is introduced. It is added to Magic.ini to control the default value for Confirm Update on Web Client tasks.

Provision of New Directives

mgFormat

Magic xpa 4.5 provides you a free hand to be able to implement masking of mobile number formatting, currency, etc., your way. Magic provides you a directive named **mgFormat** that replaces the **Pattern** attribute and the two earlier directives **AlphaMagicDirective** and **BooleanMagicDirective**.

NonMagicControl

You can assign a new directive **NonMagicControl** to a focusable non-Magic html element to intimate the Magic engine about a new html element in focus. If the previous control-in-focus was a Magic control, then this directive updates the variable attached to that Magic control.

Support for Customization of Alert and Confirmation Messages

Magic xpa 4.5 allows you to use your own component to customize the alert and confirmation messages to the desired ones in your Web application in place of the default JavaScript alert and confirmation messages. All you need to do is to employ the service **ConfirmationComponentsMagicProvider** to customize the UI messages.

Web Client Enhancements

The following enhancements are done in Magic xpa 4.5.

Support of Web Client for Single User Edition

The Single User Edition supports Web Client tasks. You can use the standard studio during development as in case of the other tasks. You need to set **LicenseName=MGWEB** during deployment in order to load the correct default license.

Enhanced Table Display

The tables with empty records will not show default values in columns now when 'Allow Empty DataView' property is set to 'Yes' in Web Client tasks.

Enhanced HTML Generation

With Magic xpa update, you can generate HTML code for the selected individual control, for the selected control with its child controls, and for the entire Web Client form.

You can also avail the generated HTML code for future use. You can press the Copy button and the generated HTML code is copied to Windows clipboard without having you to mark the code before copying.

No Generation or Overriding of CSS Files per Component


Magic xpa does not generate separate CSS files for each component. If you already have a project in Magic xpa 4.1/4.0 and you upgrade to Magic xpa 4.5, you need to update the file **Magic-style.css** with the following styles:

```
.button_image_background_size{
    background-size: 100% 100%;
}
.lable_overflow{
    overflow: hidden;
}
.table_scrollBar{
    height: 600px;
    overflow-y: scroll;
}
.container_border{
    border: lightskyblue solid 1px;
}
.selected {
    background: #F5F5F5;
}
.table_row:hover {
    background-color: #EEEEEE;
}
```

Now onwards, when a program or a form will be generated, the css file will not be created inside the component. The common css file will be referred.

Support to Generate Metadata

The Magic xpa update now copies the generated metadata files from the Magic project's `\input` folder to the Angular folder `\magic-metadata`.

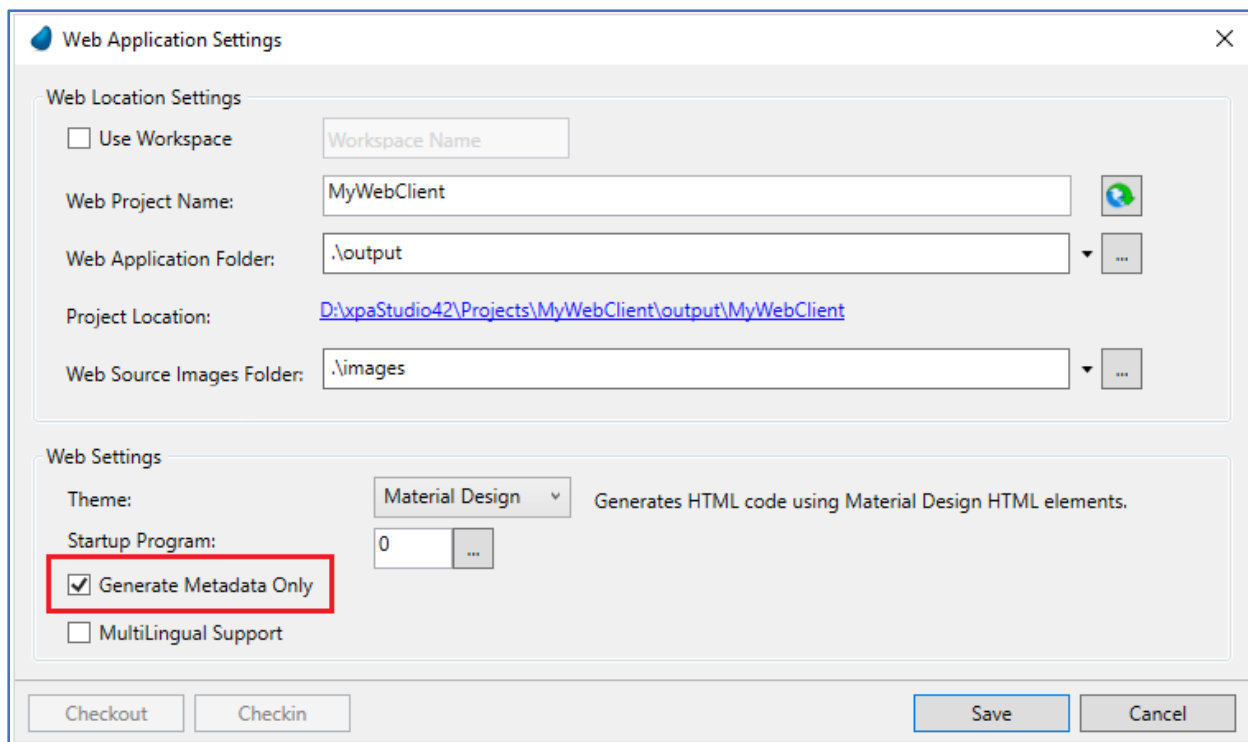

Thus, you can maintain the same versions of the metadata files between xpa and Angular projects.

Support to Maintain the Most Recent Metadata

When you generate the same Web application second time onward, Magic xpa 4.5 clears the previously created `\input` folder.

The Overlay Windows

An overlay window in Magic xpa 4.5 behaves identical to a Modal window. Means, all operations after the Call operation are executed only after the Called window is closed.

You can now control the properties of overlay windows from Angular/HTML/CSS. For more information, please see the concept paper [Developing Web Client Applications](#).

Support for Same Workspace for Multiple Projects

Magic xpa update now provides you the ability to have multiple applications or sites under one Angular (CLI) workspace. Additionally, you can create shared set of components, directives, and services for your applications within the same Angular workspace.

New Concept Papers

The following concept papers are added in the help and in the \Support folder:

- Developing Web Client Applications
- Row Editing in Web Client
- Routing in Web Client
- Customizing Overlay Windows
- Navigating Browser History
- Customizing Alert and Confirmation Messages
- Concepts of Login and Logout
- Understanding Web Modules
- Deploying Web Client Applications

Removal of Mouse Events for Web Client

The support for two events 'Mouse Over' and 'Mouse Out' is removed for Web Client tasks.

Non-Web Client New Features

The following non-web client features are added in 4.5.

Provision to Disconnect from SQLite Database

You can disable all the existing database connections to the SQLite database once the special flag **SpecialPostRequestDBDisconnect** is set to Y.

SpecialPostRequestDBDisconnect

The runtime engine disconnects all the existing connections to the connected SQLite databases when all of the following conditions are true:

- This flag is set to Y.
- The runtime engine was executed via the xpa studio.
- The runtime engine is activated as an enterprise server (connected to a middleware).
- The runtime engine finished executing the request (the engine has just moved from available status) and is now returning control to the studio. This status can be seen when the engine is connected to a middleware.
- The connection is to a SQLite database.

Valid values: Y, N

Default value: N

Non-Web Client Enhancements

The following non-web client features are enhanced in 4.5.

Improve Git support

To overcome the limitations of PushOK Git and to enable you to work with Local and remote Git repositories, xpa integrated with TortoiseGit and work with repositories directly from the xpa studio interface.

With TortoiseGit, xpa makes it possible for you to:

- Add project files to the repository, commit your changes, pull the changes from and push them to repositories, compare, and merge for individual project repository items; without leaving the studio.
- Cherry-pick instead of merging to have exact control over which commits are ported back to the master branch.

Session Hijacking Prevention for Web Client

The flag `SpecialRIAGenerateAndValidateSessionID` is renamed as `SpecialClientGenerateAndValidateSessionID` in Magic xpa 4.5. The latter is now effective for Web Client as well. In the previous versions (starting from Magic xpa 3.2d up until 3.3c), the flag retains its old name: `SpecialRIAGenerateAndValidateSessionID`. The flag `SpecialClientGenerateAndValidateSessionID` is not supported for Broker.

Android: Migration to Android Jetpacks

Magic app now uses AndroidX for management of Android Support Library using Jetpacks.

iOS: Support of iOS 10

Magic xpa Rich Client Applications now support minimum iOS 10.

Non-Web Client Removed Features

The following non-web client features is removed from Magic xpa 4.5.

Support for Windows 10 Mobile

Support for Windows 10 Mobile is discontinued in Magic xpa 4.5.

Support for FlexLM Licensing

Support for FlexLM License Server is discontinued from the installation of Magic 4.5 for all product types.

Magic xpa 4.1

New Features and Enhancements

We are delighted to present the Magic xpa 4.1 update with new features and enhancements.

New Features

The following new features are added in Magic xpa 4.1.

Magic xpa Needs Angular 7

Magic xpa 4.1 update now works with Angular 7.

Support for Row Editing in Table Control

Magic xpa now supports editing a row in Table control. The following new features are added to be able to achieve the row editing functionality.

- A new internal event named 'Enter Row Editing'
- A new Magic function named 'IsRowEditing()'

Support for Updating Magic Data View from Outside

Magic xpa now adds the ability to update the variables defined in Data View from Angular code. Consider it to implement uploading files to the server.

New Function DataViewToJSON()

Magic xpa introduces a new function DataViewToJSON() to return the data from program Data View to JSON format to be able to read it from Angular code.

Support for Date Field Using Form Control

Magic xpa now supports editing Date field using Input Type = Date. This is applicable for Native theme. The Date value accessor is added to support editing Date field, which is inspired by angular-date-value-accessor: <https://www.npmjs.com/package/angular-date-value-accessor>.

Enhancements

The following enhancements are added in Magic xpa 4.1.

Easy Row Selection

You can select a row by clicking anywhere on the desired row. If you click on the disabled controls placed on the desired row, the control does not select the desired row.

Provision for Better Clarity in Console Messages

In order to bring more clarity with the source of errors in console, Magic xpa now marks the errors to indicate that they are distinctively from Magic.

Record Flush Event - Control Re-fetching from DB

An optional parameter named 'Refetch Record' is now added to the Internal Event 'Record Flush' to control whether the event will re-fetch the record from the database.

Fixed Issue

Defect	Description
154736	In a particular case, not all records are displayed while calling a program using Route.

Magic xpa 4.0

The Magic Web Application Framework

We are delighted to introduce our most awaited offering of Magic xpa, the Magic Web Application Framework, to provide rapid business application development with modern UI development capabilities using Angular, HTML5, and CSS.


Apps Powered by Angular

You can now easily create modern business apps powered by Angular to provide a rich user experience and meet the increasingly complex enterprise business expectations for digital transformation.

You can now take your Magic xpa business logic for the back and the front end, and easily generate Angular code from it. The new Angular-based application can then work seamlessly with any Web presentation framework. The new Web application framework is beneficial in the following ways:

- You are free to tap into the world of Angular.
- Your apps are client-free since the deployed application is pure JS, HTML5, and CSS3.
- You can outsource the screens design.

The Web Client application generation can be viewed in the following illustration:

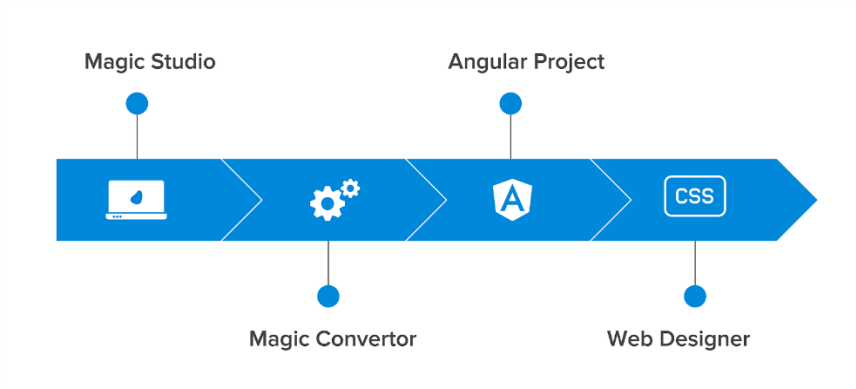

5. In the **Magic Studio**, you define your business logic.
6. In the Magic studio, with just a click of a button, you generate your Angular code using the **Magic Converter**, which is customizable by advanced users.
7. In **Angular**, your code is now ready-to-use, but you can also add additional Angular code that is pure client-side logic using some Magic tags.
8. Outside the Magic, you or a designer can update your screens using **HTML and CSS**.

In this way, you can develop highly-responsive Web applications in no time. You can use the structured, low-code Magic xpa development platform for creating the business logic together with an open platform for the presenting your screens including the UI and the UX.

Why Do You Need Magic's Web Application Framework?

Here is why you need Magic's Web Application:

Magic and Angular Fit Well Together

Applications created with Magic's Web application framework will be pure Angular applications, meaning they will be deployed and managed exactly like any Angular application.

State-of-the-art Technology

Magic's Web application framework uses state-of-the-art client-side technologies including JavaScript, Angular, CSS3, HTML5, and TypeScript. You can create full-fledged business heavy-duty, transaction intensive web-based applications including data entry, enabling you to integrate your applications with Web Technology.

Magic xpa's Client-side Architecture

All of the UI-related work, including the UI logic, is done by the browser (the client), which enables you to create fast and dynamic Web applications. In this architecture, the server only sends raw data to the client and the client generates the screen.

Manageable Large Scale Angular Applications

Over the years, the number of lines of code needed to develop functionality-intensive Web applications has been growing at a very rapid pace. As applications are evolving, the market keeps coming up with better ways to handle the ever-increasing lines of code.

Advanced Customization of Your UIs

The beauty of the decoupling of the UI and logic, which Magic's Web application framework makes possible, is the flexibility to split the effort and time invested, between the business logic and the UI/UX.

Less Code; More Versatility

The Magic engine's robust business logic paradigm can save a lot of code in Angular. It helps to set-up most of the behind-the-scenes logic for presenting the UI dynamically.

Magic offers a wide range of control and form properties, which are very simple to use and can save a lot of lines of coding in Angular. For example, validation, recompute, conditions, visible, enabled, tooltips, and more.

Expressions on any of the properties are very easy to use in Magic, which otherwise would take dozens of lines of codes to develop in Angular, to achieve dynamic behavior in apps.

The appearance properties, such as Font, were removed and the basic appearance is done in HTML/CSS/Angular. The remaining properties are for either binding or behavior and these are set in Magic with no need to code these functionalities in Angular. So, by adding a tag to Angular for one of these binding or behavior functionalities, you are basically linking Magic to Angular.

Fully Compliant with Single-Page Applications (SPAs)

Magic's Web application framework is fully compliant with single-page applications (SPA), which provide a smoother and richer user experience.

Cloud Enabler: The Sky's the Limit

Since the Web client is Web-enabled, running in the browser, the Web client is cloud enabled. This means that your apps can be deployed on any cloud.

Cross Browser Support and Portability

Your Web applications will be platform-agnostic. They will run on any browser and on any device with zero footprint. You do not need to install anything.

Ease of Maintenance in the Future

You can change your application logic from Magic and it will be reflected automatically in your Angular-based apps. Thus, there are less efforts to make changes in your application in future.

Full Git Support

Magic xpa is equipped to empower team development with its full Git support (including branching and merging).

About Magic Software Enterprises

Magic Software Enterprises (NASDAQ: MGIC) empowers customers and partners around the globe with smarter technology that provides a multi-channel user experience of enterprise logic and data.

We draw on 30 years of experience, millions of installations worldwide, and strategic alliances with global IT leaders, including IBM, Microsoft, Oracle, Salesforce.com, and SAP, to enable our customers to seamlessly adopt new technologies and maximize business opportunities.

For more information, visit <http://www.magicsoftware.com>.



Disclaimer

Magic® is the registered trademark of Magic Software Enterprises Ltd. All other product and company names mentioned herein are for identification purposes only and are the property of, and might be trademarks of, their respective owners.

Magic Software Enterprises has made every effort to ensure that the information contained in this document is accurate. However; there are no representations or warranties regarding this information, including warranties of merchantability or fitness for a particular purpose. In no event Magic Software Enterprises Ltd. will be liable for any loss of profit, business, or data, or any kind of indirect, incidental or consequential damages due to the use of this document. Magic Software Enterprises assumes no responsibility for errors or omissions that may occur in this document. The information in this document is subject to change without prior notice and does not represent a commitment by Magic Software Enterprises or its representatives.

Copyright © 1989-2025 Magic Software Enterprises. All rights reserved.